



1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL OTHER DRAWINGS, SCHEDULES AND SPECIFICATIONS FOR THIS SCHEME.
2. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE SHOWN.
3. ALL ROAD MARKINGS ARE TO BE SET OUT IN ACCORDANCE WITH T.S.R.G.D 2016.
4. FOR FURTHER DETAILS ON PROPOSED BOLLARDS WITH RED/WHITE BANDING, TACTILE PAVING CONSTRUCTION, AND REFLECTORISED REBOUNDABLE BOLLARDS, SEE TYPICAL DETAILS DRAWING, 10056014-ARC-GEN-ZZ-DR-HE-20001.

EXISTING BOLLARDS TO BE REPLACED
WITH REFLECTORISED REBOUNDABLE
'KEEP LEFT' BOLLARDS
REFER TO STANDARD DETAILS
DRAWING
10056014-ARC-GEN-ZZ-DR-HE-20001

PROPOSED REFLECTORISED
BOLLARDS WITH WHITE/RED BOUNDN
REFER TO STANDARD DETAILS
DRAWING
10056014-ARC-GEN-ZZ-DR-HE-20001


PROPOSED THERMOPLASTIC WHITE
ROAD MARKINGS
SCHEDULE 11, PART 4, ITEM 18,
DIAGRAM 1029

EXISTING TACTILE PAVING TO BE
RE-LAID, IF REQUIRED. TO BE AGREED
ON SITE
REFER TO STANDARD DETAILS
DRAWING
10056014-ARC-GEN-ZZ-DR-HE-20001

P01	20/07/23	First issue		GD	KA	PS	L
Rev	Date	Description		Prod.	Chk.	Rev.	A



Site	Client
Stoney Lane Corridor Birmingham	Birmingham City Council 1 Lancaster Circus, PO Box 16719 Birmingham, B2 2GA www.birmingham.gov.uk

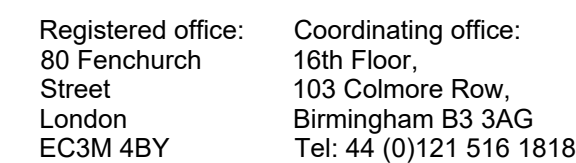

www.arcadis.com

© Copyright reserved

BCC Stoney Lane
General Arrangement
Sheet 3 of 5
Stoney Lane / Foliot Fields Junction

Designed: L.N.Cook	Signed Digitally Signed	Date 17/07/23
Produced: G.Davis	Signed Digitally Signed	Date 19/07/23
Checked: K.Allen	Signed Digitally Signed	Date 19/07/23
Reviewed: P.Salter	Signed Digitally Signed	Date 19/07/23
Approved: L.Howells	Signed Digitally Signed	Date 20/07/23

Design Stage:		
Detailed Design		
Original Size:	Grid:	Datum:
A1	OS	AOD
Suitability Code:	Scale:	Project Number:
S5	1:100	10056014

Suitable for Review and Acceptance

Drawing Number:	10056014 - ARC - HGN - 33 DB LF 20003	Revision:	P01
-----------------	--	-----------	-----

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following:

HS-01 -
The contractor must take precautions to avoid any unexpected presence of voids under the footway/verge or/and any underground utility services.

NONE

NONE

It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement

Print Date: 2023-07-24 10:23:46

C:\bms\arcadis-uk-09\dms53706\10056014-ARC-HGN-ZZ-DR-HE-20003.dwg