


- NOTES**
- ALL WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE CONTRACT SPECIFICATION AND THE MANUAL OF CONTRACT DOCUMENTS FOR HIGHWAY WORKS INCLUDING REVISION/AMENDMENTS AND ANY CLIENT SPECIFIC ADDITIONAL OR SUBSTITUTE CLAUSES.
 - ALL SIGNS TO BE MOUNTED TO MAINTAIN A MINIMUM 450MM CLEARANCE FROM THE EDGE OF CARRIAGEWAY
 - POSTS TO BE INSTALLED TO MAINTAIN A MINIMUM 1200MM FOOTWAY CLEARANCE
 - EXACT LOCATION OF SIGNS TO BE AGREED WITH ENGINEERS ON SITE PRIOR TO INSTALLATION
- CDM NOTES**
- THE CONTRACTOR SHALL DETERMINE THE LOCATION AND STATUS OF ANY STATUTORY UTILITY APPARATUS PRIOR TO THE COMMENCEMENT OF ANY WORKS.

- KEY**
- DENOTES APPROXIMATE LOCATION OF PROPOSED SIGNS TO DIAG. 956 MOUNTED ON SINGLE POLE BACK TO BACK - UNLESS OTHERWISE STATED.
 - PROPOSED SHARED SURFACE
 - EXISTING SIGNED ON-STREET CYCLE ROUTES
 - PROPOSED SIGNED ON STREET CYCLE ROUTES

ISSUE/REVISION

I/R	DATE	DESCRIPTION
A	JULY 2013	RECOMMENDATION REVISED
-	JUNE 2013	FIRST ISSUE

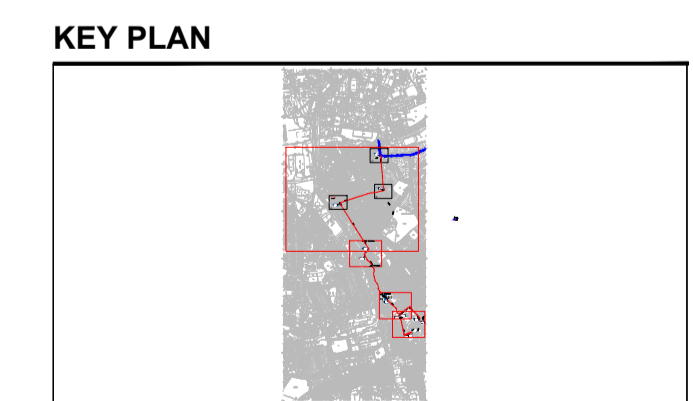

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.