



Birmingham Clean Air Zone Feasibility Study

Birmingham City Council

Air Quality Modelling Report

29 June 2018



Birmingham Clean Air Zone Feasibility Study

Project No: B2309014
 Document Title: Air Quality Modelling Report
 Document No.: 1
 Revision: 3.0
 Date: 29 June 2018
 Client Name: Birmingham City Council
 Client No:
 Project Manager: Tom Kavanagh
 Authors: Nigel Bellamy, Glyn Hodgkiss

Jacobs U.K. Limited

New City Court_20 St Thomas Street_London SE1 9RS_United Kingdom
 T +44 (0)20 7939 6100
 F +44 (0)20 7939 6103
www.jacobs.com

© Copyright 2018 Jacobs U.K. Limited. The concepts and information contained in this document are the property of Jacobs. Use or copying of this document in whole or in part without the written permission of Jacobs constitutes an infringement of copyright.

Limitation: This document has been prepared on behalf of, and for the exclusive use of Jacobs' client, and is subject to, and issued in accordance with, the provisions of the contract between Jacobs and the client. Jacobs accepts no liability or responsibility whatsoever for, or in respect of, any use of, or reliance upon, this document by any third party.

Document history and status

Revision	Date	Description	By	Review	Approved
1.0	23/04/18	Draft	G. Hodgkiss	N. Bellamy	N. Bellamy
2.0	11/06/18	Draft v 1.0 incorporating M. Wolstencroft comments plus CAZ C & D with additional measures	G. Hodgkiss	D. Howells	N. Bellamy
3.0	29/06/18	Draft v 2.0 plus JAQU comments	G. Hodgkiss	D. Howells	N. Bellamy

Contents

Executive Summary.....	5
1. Introduction.....	7
1.1 What is meant by 'air quality'?	7
1.2 Air Pollution and Public Health	7
1.3 EU/UK air quality legislation	9
1.4 Local Air Quality Management in Birmingham	10
1.5 UK Plan for Tackling Roadside Nitrogen Dioxide Concentrations	10
2. Existing Initiatives	11
2.1 Air Quality Action Plan	11
2.2 Taxis and Private Hire Vehicles	11
2.3 Freight and Logistics	11
2.4 Other Transport Projects	12
2.5 Smoke Control Areas	12
2.6 Policies and Strategies	12
2.6.1 Birmingham Connected	12
2.6.2 Low Carbon Fuel Infrastructure	12
2.6.3 West Midlands Low Emission Bus Delivery Plan	12
3. The Case for Further Intervention	14
3.1 Update on Birmingham's Air Quality	14
3.1.1 Current Position	14
3.1.2 Future Year Estimates of Birmingham's Air Quality	14
3.2 Areas of Exceedance	15
4. CAZ Options.....	16
4.1 Background to the Proposals	16
4.2 Potential Options for Birmingham.....	16
5. Traffic Modelling Methodology	18
5.1 Introduction.....	18
5.2 2016 Base Year Model.....	19
5.3 2020 Do Minimum (DM) Scenario	19
5.3.1 Road Network.....	19
5.3.2 Traffic Growth to 2020	20
5.3.3 Traffic Fleet.....	20
5.4 2020 CAZ Scenarios	21
6. Outline of The Air Quality Modelling Process	26
6.1 Traffic Data, Fleet Mix and Emissions.....	26
6.2 Air Quality Modelling Set-Up	27
6.3 Air Quality Monitoring Data	27
6.4 Background Air Quality Data	28
6.5 NOx Chemistry	28
6.6 Model Verification	28

7.	Air Quality Modelling Results	29
7.1	Baseline Evaluation and Comparison with PCM.....	29
7.2	2020 DM Baseline	29
7.3	Basic CAZ Scenarios.....	30
7.3.1	CAZ C (High Charge)	31
7.3.2	CAZ D (Medium Charge).....	32
7.3.3	CAZ D (High Charge)	32
7.4	CAZ Plus Additional Measures.....	33
7.4.1	Overview.....	33
7.4.2	CAZ C High Plus Additional Measures.....	37
7.4.3	CAZ D High Plus Additional Measures.....	37
8.	Conclusions	39

Appendix A. Explanation of Vehicle Emissions Standards

Appendix B. Local Fleet Mix Profiles

Appendix C. Model Verification

Appendix D. Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Appendix E. Dispersion Modelling Results from Additional Measures Packages

Table 1-1 : Numbers of Deaths, Asthmatic Children with Bronchitic Symptoms and Respiratory Hospital Admissions Attributable to NO ₂ Pollution Under the Business as Usual Case	8
Table 1-2: Local Mortality Burden Associated with Particulate Air Pollution in West Midlands Local Authorities...	8
Table 1-3 : Legal Limits for Pollutants of Most Concern in the West Midlands Urban Area, Including Birmingham	9
Table 3-1 : Defra's Estimated Percentage of Modelled Road Length Exceeding Limits with No Further Action.	15
Table 4-1 : Proposed Classification Standards for Compliant Vehicles	17
Table 4-2 : Defra CAZ classes	17
Table 4-3 Potential CAZ Charging Rates	17
Table 5-1 : Traffic Modelling Tools	18
Table 5-2 BCC Traffic Growth 2016 to 2020	20
Table 5-3 Non-CAZ Scenario Forecast Compliance Rate	21
Table 5-4 Demand Response Hierarchy	21
Table 5-5 : Geographical Responses	23
Table 5-6 : Application of Responses to Assignment Model	23
Table 5-7 : Assumptions Used in Modelling Various Vehicle Types	24
Table 6-1 : Annual Average Daily Traffic Flows 2016	26
Table 7-1 : Summary of 2020 DM Source Apportionment Results	30
Table 7-2 : Summary of Modelled Air Quality CAZ Scenarios	31
Table 7-3 : Summary of 2020 CAZ C High Charge Source Apportionment Results.....	32
Table 7-4 : Summary of 2020 CAZ D High Charge Source Apportionment Results.....	33
Table 7-5 : Package of Additional Measures.....	34
Table 7-6 : Summary of Dispersion Modelling Results from Additional Measures Packages	36
Table 7-7 : Summary of CAZ D High Charge Plus Additional Measures Source Apportionment Results	37
Table 7-8 : Summary of 2020 CAZ D High Charge Plus Additional Measures Source Apportionment Results..	38

Executive Summary

A Clean Air Zone (CAZ) is being considered as part of a wider package of measures by Birmingham City Council (BCC) in order to achieve compliance with the European Union (EU) annual legal Limit Values for nitrogen dioxide (NO₂) of 40µg/m³ in the shortest possible time.

Jacobs was commissioned on behalf of Birmingham City Council (BCC) to undertake a feasibility study for a CAZ within the City of Birmingham, focusing on measures associated with road vehicles.

This technical report provides an overview of the methodology, data sources and associated outcomes of the processes followed to calculate the vehicle emissions and resulting concentrations of NO₂ in the (2016) base year and (2020) future year scenarios. This technical evidence base has been used to design and evaluate future CAZ options and any additional measures required to deliver compliance with EU Limit Values within the shortest possible timescale.

The report contains a full description of the factors driving implementation of the CAZ, the existing measures being undertaken by BCC to improve air quality, and an evaluation of the potential air quality benefits which could be delivered by the implementation of a suitable CAZ with appropriate supporting additional measures.

The results of the traffic and air quality modelling undertaken to date have demonstrated that implementation of a charging 'class C' or 'class D' Clean Air Zone (CAZ), in the absence of supporting additional measures, would be insufficient to deliver compliance with EU Limit Values.

Under a class C CAZ (with high charge) based on the boundary of the Inner Ring Road, exceedances of the EU Limit for NO₂ are still predicted to occur on the A38 and Ring Road in 2020. It is estimated that additional reductions of up to 11% and 31% of total oxides of nitrogen (NO_x) would be required, outside and inside the CAZ, respectively, to achieve compliance with the Limit Value. Even if all the vehicles restricted by 'category C' which entered the zone had a compliant engine, the levels of NO₂ would still be too great. This reflects the fact that over 80% of the vehicles entering the CAZ area are private cars, and these are not restricted by a CAZ C scheme.

Under a class D CAZ (where non-compliant cars are subject to charging), concentrations of NO₂ reduce by an additional 1.5 µg/m³ inside the CAZ (with a medium charge), and by 1.8 µg/m³ for a high charge, beyond the CAZ C high scenario. There are still places, however, where the legal limits are predicted to be exceeded on the A38 and Ring Road. It is estimated that additional reductions of up to 9% and 19% NO_x are required, outside and inside the CAZ respectively, to remove these exceedances.

A number of additional measures which could be applied to support the various CAZ options have been evaluated as part of work undertaken to date. The package of measures tested include upgrade to buses and taxis, removal of free parking, changes to the road network and upgrades to bus corridors.

With a CAZ C High Charge Plus Additional Measures scheme in place, dispersion modelling shows that by 2020, the total number of exceedances is predicted to reduce from 19 (in the CAZ C High Scenario) to 17 (In the CAZ C High Plus Additional Measures scenario). In order to deliver full compliance, additional reductions in NO_x of between 14 and 31% will still be required.

The CAZ D High Charge Plus Additional Measures scheme is predicted deliver greater improvements by 2020, reducing the total number of exceedances from 12 (in the CAZ D High Scenario) to 10 (In the CAZ D High plus Additional Measures scenario). In order to deliver full compliance, additional reductions in NO_x of between 3 and 19% would still be required.

Overall, the CAZ D Plus Additional Measures Scheme represents the most effective scenario evaluated to date. However, since modelling the most stringent possible measures still hasn't led to compliance, BCC will be looking at achieving compliance in 2021. This is beyond the year assumed in the national modelling for the 2017 Plan because detailed local modelling presented in this report has shown that the problem is worse (in terms of number of sites over limit value and the fact that a number of sites over the limit value are outside of the city centre).

Further sensitivity analysis is being undertaken on a range of assumptions and therefore the overall conclusions leading to the preferred option may be subject to change.

1. Introduction

1.1 What is meant by 'air quality'?

Air quality is a term used to describe the air that we breathe, and the level of pollutant concentrations that are considered to be reasonably 'safe' from a health perspective¹. The main pollutants of concern in the UK are nitrogen dioxide (NO₂) and fine particulate matter (PM). The majority of these pollutant emissions are typically associated with combustion emissions, including from vehicles and industry. Part IV of the Environment Act (1995) and resultant initial Air Quality Strategy, in the late 1990's, introduced the concept of local air quality management (LAQM) in the UK and it was expected at this time that the forthcoming vehicle emissions standards for road vehicles and industrial permitting would deliver, if not all, then the majority of the air quality improvements needed to meet legislation. However, the predicted reductions in pollution concentrations of NO₂ have not occurred as rapidly as expected and further action is now required.

1.2 Air Pollution and Public Health

The real driver for tackling pollution is the benefit to public health. It is also a social justice issue for more vulnerable people as well as a health and environmental concern, particularly given the high number of schools, hospitals and care homes affected by poor air quality.

NO₂ and PM, are currently causing the greatest concern in Birmingham and other major cities across the UK. Specific health impacts² for these pollutants are summarised as follows:

- NO₂: At high concentrations, NO₂ causes inflammation of the airways. Long-term exposure is associated with an increase in symptoms of bronchitis in asthmatic children and reduced lung development and function
- PM: Long-term exposure contributes to the risk of developing cardiovascular and respiratory diseases, including lung cancer. Research shows that PM₁₀ (particles with a diameter of 10 microns and smaller) are likely to be inhaled deep into the respiratory tract. The health impacts of particles with a diameter of 2.5 microns or smaller (PM_{2.5}) are especially significant as smaller particles can penetrate even deeper

The extent of the negative effects of air pollution on health depends on an individual's level of exposure and other conditions that they may be vulnerable to, or suffering from. Knowledge in this area is continually increasing as research progresses. Preliminary work undertaken in 2015 as part of the West Midlands Low Emissions Towns and Cities (LETC) Programme³ provided estimates of the current impacts of NO₂ pollution on Birmingham city centre and the wider West Midlands Conurbation⁴. Table 1-1 shows the estimated number of deaths per year that are attributable to NO₂ pollution, the reduction in the prevalence of chronic bronchitis in asthmatic children compared to the 2011 baseline, and the number of respiratory hospital admissions for each of the 7 West Midlands Metropolitan Boroughs for 'business as usual' cases in 2011, 2018 and 2026.

In 2011, it was estimated that 906 deaths in the West Midlands Metropolitan Districts were attributable to NO₂ pollution, including 371 in Birmingham. It can be seen that the number will decrease substantially in the future 'business as usual' cases, primarily as a result of emissions reductions in motor vehicles.

It was also estimated that the reduction in emissions between 2011 and 2026 under the 'business as usual' cases will reduce the number of asthmatic children showing bronchitis symptoms each year by 873 in Birmingham and 1946 across the wider West Midlands conurbation.

Further evaluation indicated that there were 1896 hospital admissions for respiratory diseases in 2011 the West Midlands Metropolitan Districts attributable to NO₂ air pollution, including 774 in Birmingham. The estimated number of hospital admissions will decrease by 27% between 2011 and 2026 under the 'business as usual' case.

¹ It can also relate to impacts on eco-systems, but this is beyond the scope of this report.

² [Ambient \(Outdoor\) Air Quality and Health Fact Sheet](#), World Health Organisation (2016). Accessed February 2018.

³ [West Midlands Low Emissions Towns and Cities \(LETC\) Programme](#). Accessed February 2018.

⁴ [West Midlands Low Emission Zones: Technical Feasibility Study, Economic and Health Impacts of Air Pollution Reductions](#), Ricardo-AEA, February 2015. Accessed February 2018.

Table 1-1 : Numbers of Deaths, Asthmatic Children with Bronchitic Symptoms and Respiratory Hospital Admissions Attributable to NO₂ Pollution Under the Business as Usual Case

Local Authority	Deaths per year attributable to NO ₂ pollution			Prevalence of Chronic Bronchitis in Asthmatic Children				Respiratory Hospital Admissions Per Year		
	2011	2018	2026	Base	Reduction			2011	2018	2026
					2011	2018	2026			
Birmingham	371	175	59	9,055	0	525	873	774	648	563
Coventry	70	21	4	2,209	0	101	164	200	171	152
Dudley	72	21	3	2,239	0	101	166	165	166	148
Sandwell	147	71	22	2,411	0	155	252	231	191	165
Solihull	62	24	7	1,516	0	80	130	138	116	102
Walsall	107	43	10	2,091	0	133	215	193	158	136
Wolverhampton	78	29	7	1,800	0	90	147	165	139	123
West Midlands Metropolitan Districts	906	383	112	21,322	-	1,184	1,946	1,896	1,589	1,388

Table 1-2 shows the estimated burden on local mortality attributable to man-made particulate air pollution. It shows the calculated population weighted man-made PM_{2.5} concentrations for each district and the calculated numbers of attributable deaths. It also shows the estimated number of attributable life-years lost. It is estimated that there were 1359 deaths attributable to particulate air pollution in 2011 in the West Midlands Metropolitan Authorities, including 486 in Birmingham. This is expected to decrease to 426 in 2026, and 1188 across the region, under the 'business as usual' scenario. The number of deaths attributable to NO₂ in Birmingham (371 in 2011) is slightly smaller than that calculated for particulate matter. (Note that particulate matter may contribute to the estimated number of deaths attributable to NO₂ so that the effects may not be additive).

Table 1-2: Local Mortality Burden Associated with Particulate Air Pollution in West Midlands Local Authorities

Local Authority	Average PM _{2.5} concentration, µgm ⁻³			Deaths 2008-2012	Annual Deaths Per Year Attributable to PM _{2.5} Particulate Air Pollution			Life Years Lost per Year Attributable to PM _{2.5} Particulate Air Pollution		
	2011	2018	2026		2011	2018	2026	2011	2018	2026
Birmingham	10.5	9.5	9.1	41,242	486	441	426	5,838	5,296	5,112
Coventry	10.3	9.4	8.9	13,453	156	142	137	1,874	1,709	1,642
Dudley	9.4	8.5	8.1	14,771	158	142	137	1,896	1,710	1,650
Sandwell	11.0	9.9	9.5	14,411	178	161	156	2,134	1,927	1,873
Solihull	10.0	9.1	8.7	9,094	103	94	90	1,233	1,128	1,083
Walsall	10.6	9.6	9.2	12,304	147	133	128	1,756	1,593	1,542
Wolverhampton	9.5	8.6	8.3	12,094	131	118	114	1,569	1,421	1,369
West Midlands Metropolitan Districts	-	-	-	117,369	1,359	1,231	1,188	16,300	14,784	14,271

An understanding of the effects associated with sudden peaks in air pollutant concentrations is also improving. Air pollution is now believed to play a significant role in some cardiovascular episodes, for instance heart attacks, and in a range of health conditions from asthma to dementia.

Clearly, this emerging evidence demonstrates that air quality improvements can have a major impact in terms of delivering health benefits, and further practical interventions to improve air quality will accelerate the delivery of these positive outcomes.

1.3 EU/UK air quality legislation

The Air Quality (Standards) Regulations 2010 set legal limits (called 'limit values') for concentrations of pollutants in outdoor air. These are based on the EU Air Quality Limit Values⁵.

The UK government is currently responsible to the EU for ensuring that it complies with the provisions of the EU Air Quality Directives⁶, which are legally binding. However, under the Localism Act (2011), the UK government has discretionary powers to pass on any fines (or a proportion) to local authorities.

For NO₂, the European Commission has initiated infringement proceedings against the UK and 12 other Member States⁷. On the UK government's behalf, the Department for Transport (DfT) and Department for Environment Food and Rural Affairs (Defra) have Public Service Agreements relating to EU Air Quality Limit Values and it is their responsibility to ensure that the UK meets these. The legal limits for NO₂ and other pollutants of most concern for the West Midlands Urban Area (including Birmingham) are shown in Table 1-3.

Table 1-3 : Legal Limits for Pollutants of Most Concern in the West Midlands Urban Area, Including Birmingham

Pollutant	Concentration (limit value) $\mu\text{g m}^{-3}$	Averaging Period	Target and Limit Values	Number of permitted exceedances each year	Compliance assessment for 2016 in the West Midlands Urban Area (Including Birmingham) ⁸
PM _{2.5}	25 ⁹	1 year	Target value came into force on 1 January 2010 Limit value came into force on 1 January 2015	n/a	Compliant
PM ₁₀	50	24 hours	Limit value came into force on 1 January 2005 (time extension granted to June 2011)	35	Compliant ¹⁰
	40	1 year	Limit value came into force on 1 January 2005	n/a	Compliant
NO ₂	200	1 hour	Limit value came into force on 1 January 2010	18	Compliant
	40	1 year	Limit value came into force on 1 January 2010	n/a	Non-Compliant

Defra has reported PM compliance limits for 2016 across England and Wales, with most 'non-reportable' sites falling below the legal limits. However, there are no safe limits for PM_{2.5} which is more damaging to health than PM₁₀. Health evidence suggests that further emissions reductions, will bring about improvements in health for UK residents. Without further action there is the prospect of PM_{2.5} emissions increasing if traffic levels rise.

⁵ Taken from: ec.europa.eu/environment/air/quality/standards.htm. Accessed February 2018.

⁶ [Ambient Air Quality Directive 2008/50/EC](#) and [Directive 2004/107/EC relating to other pollutants](#). Accessed February 2018.

⁷ [Communication from the Commission to the European Parliament, The Council, The European Economic and Social Committee and the Committee of the Regions. A Europe That Protects: Clean Air For All \(2018\)](#). Accessed June 2018.

⁸ [Air Pollution in the UK 2016. Defra \(2016\)](#). Accessed February 2018.

⁹ An obligation to reduce exposure to concentrations of fine particles also came into force from 2015.

¹⁰ Following the subtraction of natural sources in accordance with the directive

1.4 Local Air Quality Management in Birmingham

The basic statutory framework for local air quality management (LAQM) exists under the national Air Quality Regulations and Part IV of the Environment Act 1995 ('the 1995 Act', as amended, and 'Part IV functions') and this framework remains in place; relevant LAQM policy and technical guidance is provided by Defra^{11,12}.

Under the LAQM regime, a city-wide Air Quality Management Area (AQMA) was declared in 2005 due to elevated concentrations of NO₂ resulting from road traffic emissions, particularly within the city centre area¹³. The AQMA boundary has been retained since this time to ensure that there is no risk of transferring exceedance areas during the implementation of wider compliance strategies (Figure 1).

The 2016 Annual Status Report for Birmingham City Council (BCC) concluded that currently, the Air Quality Objectives (AQO) were likely to be achieved in respect of all prescribed air pollutants except NO₂¹⁴. Results from the 2016 annual mean NO₂ monitoring programme, which incorporated both automatic (continuous) and diffusion tube (DT) monitoring, indicated that there were many locations within the city-wide AQMA where concentrations still exceeded the annual mean value of 40 µg/m³ NO₂. However, it is noteworthy that none of the automated monitors indicated a breach of the short-term AQO for NO₂ during 2016.

Crucially, several areas of Birmingham continue to exceed the annual mean limit for NO₂ and this is likely to continue beyond 2020, so more action needs to be taken.

A range of measures are being progressed by the City Council and to underpin these interventions air quality has been prioritised across all services and championed by relevant politicians. This updated and prioritised governance will be supported by underpinning policies, including a review of the current Air Quality Action Plan (AQAP) during 2018.

1.5 UK Plan for Tackling Roadside Nitrogen Dioxide Concentrations

In July 2017, the government published the UK Plan for Tackling Roadside Nitrogen Dioxide Concentrations setting out how it will achieve compliance in the shortest possible time¹⁵ in response to a UK Supreme Court ruling¹⁶. The Government is requiring the initial five cities, including Birmingham, named in the 2015 UK Air Quality Plan to draw up full business cases for their local plans by 15 September 2018. The government expects local authorities in these cities to deliver their Clean Air Zones by the end of 2019, with a view to achieving statutory NO₂ limit values within the shortest possible time.

The government use the Pollution & Climate Mapping (PCM) modelling to define whether the UK is complying with the EU Limit Values. The PCM model in the government's national air quality model which predicts air quality on the major road network across the UK, and reports on the compliance status to the European Commission. The National Plan reports the road links, which comprise relatively long sections of road based on the national traffic survey count sites or 'Census ID', where the PCM has predicted exceedances of the Limit Values. The government then requires the relevant local authority to undertake local modelling to confirm where exceedances are predicted, which must include all of the PCM road network along with any other roads excluded from the PCM modelling at risk of exceedance. The local authority must then develop plans based on the Clean Air Zone Framework¹⁷ and other guidance, to reduce vehicle pollution in these locations and deliver compliance in the shortest possible time.

The government expects Birmingham to deliver their CAZ by the end of 2019, with a view to achieving statutory NO₂ Limit Values within the shortest possible time.

The Birmingham CAZ consultation proposals are consistent with the National Plan.

¹¹ [Local Air Quality Management Technical Guidance \(LAQM.TG \(16\)\)](#). Defra. April 2016. Accessed January 2018.

¹² [Local Air Quality Management Policy Guidance \(LAQM.PG \(16\)\)](#). Defra. April 2016. Accessed January 2018.

¹³ [Birmingham AQMA as amended \(2005\)](#). Accessed February 2018.

¹⁴ [2016 Air Quality Annual Status Report \(ASR\) for Birmingham City Council](#). BCC (2017). Accessed January 2018.

¹⁵ [UK Plan for Tackling Roadside Nitrogen Dioxide Concentrations](#). Detailed plan. Defra/DfT, July 2017.

¹⁶ <https://www.supremecourt.uk/cases/uksc-2012-0179.html>

¹⁷ [Clean Air Zone Framework. Principles for setting up Clean Air Zones in England](#). Defra. May 2017. Accessed June 2018.

2. Existing Initiatives

2.1 Air Quality Action Plan

Since the last update of BCC's AQAP in 2011¹⁸, a number of actions have been completed, including:

- Increasing the number of park and ride schemes
- Increasing the provision of charging infrastructure to encourage the take up of electric vehicles
- The delivery of improvements to the bus fleet under the Statutory Bus Quality Partnership (SBQP)
- Setting up an Air Quality Members Steering Group comprised of the Chair of the Public Protection Committee and the Cabinet members for Transportation, Health and Wellbeing, and Clean Streets, Recycling and Environment, to ensure that delivering improved air quality is a key priority integrated into all aspects of the Council's service delivery
- Setting up an Air Quality Program Delivery Group, chaired by the Director of Public Health, and comprised of senior officers from departments involved in the delivery of programs to improve air quality.
- Publication of Planning and Procurement Guidance to support Low Emissions Infrastructure via the West Midlands LETC programme.

It is proposed to review and update the AQAP once further details of the CAZ implementation are confirmed.

2.2 Taxis and Private Hire Vehicles

BCC's proposed policy on emission standards for taxis and private hire vehicles means that these vehicles will need to reach certain emission standards, which will gradually become stricter. Responses to the consultation on this policy are being considered and a final outcome will be published during 2018.

Under the Birmingham NO_x Reduction Champions' project, the emissions of 65 of Birmingham's Hackney carriages (black cabs) has been reduced by fitting LPG (liquefied petroleum gas) fuelled engines. These engines are Euro 6 (category N1, class III) compliant, meaning they would not be charged to enter a future CAZ.

Additional funding has been awarded by the Office for Low Emission Vehicles (OLEV) to introduce 197 electric taxi charging points, all of which will offer fast or rapid charging facilities for Hackney carriages and private hire vehicles. Electric vehicles would be exempt from charging as part of any future CAZ scheme.

2.3 Freight and Logistics

Birmingham's economy relies on the freight and logistics sector working efficiently. Poor air quality is estimated to have cost of up to £2.7 billion nationally, through its impact on productivity in 2012.

BCC wish to better understand the challenges facing local businesses seeking to improve their fleets, to appreciate the implications of a CAZ for freight operators, and to learn what other measures businesses may be required (e.g. seeking further Government funding to support a transition to cleaner fleets).

Addressing air quality presents an opportunity to not only reduce pollution levels in the city, but to open up new economic development and regeneration opportunities within the green economy for alternative fuels, new vehicle and product design, and manufacture supply chains in line with the Government's Industrial Strategy.

To this end, businesses were invited to complete a survey during 2017 and to work with the Council towards positive solutions leading to cost savings and more sustainable business operations. The final outcome of this initiative will be reported during 2018.

¹⁸ [Birmingham Air Quality Action Plan](#). BCC, 2011. Accessed February 2018.

2.4 Other Transport Projects

Birmingham Connected¹⁹ covers all transport planning activity and is built on the Birmingham Connected White Paper²⁰, the city's 20-year transport strategy. Within this scheme, many of the Council's transport projects are focused on reducing pollution emissions and enabling more sustainable modes of transport.

Birmingham Cycle Revolution²¹ aims to make cycling an everyday way to travel in Birmingham over the next 20 years. The scheme has set a target of 5% of all trips in the city to be made by bicycle by 2023, and to double this again to 10% by 2033. In 2017/18, two new, high quality cycle routes are being constructed, linking the city centre to Selly Oak and Perry Barr.

Birmingham is creating Green Travel Districts with less congestion, less pollution, fewer accidents, and healthier, safer, more productive communities. In densely populated residential areas, the aim is to create an environment where residents, workers and visitors can safely walk, cycle or take public transport as their preferred travelling option.

Alongside the CAZ, the Council is reviewing and extending parking controls in and around the city centre.

2.5 Smoke Control Areas

Birmingham was designated as a Smoke Control Area in 1995 to improve air quality. As a result of this, residents are only allowed to burn authorised fuels in an open fireplace or an exempt appliance. Burning coal is not permitted in Birmingham.

2.6 Policies and Strategies

2.6.1 Birmingham Connected

As mentioned in Section 2.4, The Birmingham Connected White Paper sets out a 20-year vision for transport in the city, including a reduction in emissions from transport and a move to more sustainable transport.

2.6.2 Low Carbon Fuel Infrastructure

In 2015, BCC launched its City Blueprint for Low Carbon Fuel Infrastructure ²².

Building on the Birmingham Connected Transport Strategy, the Council has developed a blueprint for low carbon fuel infrastructure. This blueprint identifies the key priorities and opportunities for the refuelling and recharging infrastructure that will be needed to support growing fleets of low and ultra-low carbon vehicles.

The blueprint covers electric, hydrogen, gas, methane/ bio-methane and LPG vehicles, and has been developed in close consultation with fleet operators active in the Birmingham area to deliver wide ranging air quality and CO₂ benefits offered by cleaner vehicles.

2.6.3 West Midlands Low Emission Bus Delivery Plan

Birmingham is part of the West Midlands Combined Authority Delivery Plan for Low Emission Buses.

The Low Emission Bus Delivery Plan ²³ was developed by Transport for West Midlands (TfWM) to facilitate the delivery of low emission buses to help address the region's significant air quality problems.

¹⁹ [Birmingham Connected](#). Accessed February 2018.

²⁰ [Birmingham Connected- Moving Our City Forward: Birmingham Mobility Action Plan White Paper](#). BCC, 2014. Accessed February 2018.

²¹ [Birmingham Cycle Revolution](#). Accessed February 2018.

²² [A City Blue Print for Low Carbon Fuel Refuelling Infrastructure](#). Birmingham City Council (2015). Accessed February 2018.

²³ [West Midlands Low Emission Bus Delivery Plan- A Study Commissioned by Centro](#). Element Energy & Network West Midlands. 2016. Accessed February 2018.

It highlights areas where use of low emission buses should be prioritised, by identifying air quality hot-spots, and sets out a timeline for reducing NOx emissions by over 90% by 2035.

The West Midlands Bus Alliance is a collaboration of local councils and local bus operators, co-ordinated by TfWM, and committed to ensuring that all buses in the region reach a minimum Euro V standard by 2020.

3. The Case for Further Intervention

3.1 Update on Birmingham's Air Quality

3.1.1 Current Position

Birmingham is currently compliant with legal limits for PM. However, further reductions are needed (especially to PM_{2.5} levels) to protect human health. Annual average PM₁₀ and PM_{2.5} concentrations are well within the legal limit values of 40 and 25µg/m³ respectively. Although compliance has officially been achieved, by reducing PM concentrations even more, the health benefits will be even greater.

In contrast, annual average NO₂ concentrations still exceed the legal limit on several road links in and around Birmingham City Centre. Meeting the NO₂ legal limit poses a huge challenge for many cities in the UK and across Europe. One of the key reasons why ambient levels of NO₂ remain higher than had been previously expected is the driving conditions in urban areas and concerns over the performance of the more recent Euro emissions standards for some diesel vehicles (see Appendix A for more information on Euro standards). In general, Euro standards have failed to reduce oxides of nitrogen (NO_x)²⁴ emissions from light-duty diesel vehicles (e.g. cars and vans), despite tightening emissions standards for NO_x. However, Euro VI (for heavy vehicles) is performing well and the standard for light vehicles is still bringing about a significant reduction, albeit not as much as it should.

This report only includes discussion of the impacts of any potential measures on NO₂ emissions and concentrations, as this is the pollutant that defines compliances and the definition of the potential CAZ scheme. However, the assessment process has included modelling of PM₁₀ and PM_{2.5}, alongside carbon dioxide (CO₂). These data have been used in the overall assessment of the benefits of the scheme and are included in the health impact assessment and distributional analysis.

3.1.2 Future Year Estimates of Birmingham's Air Quality

Birmingham's air quality is expected to improve, although further and more urgent action is required. Emissions from all sources are projected to decrease thanks to technological advances in vehicle design, as well as because of policies and legislation already in place to reduce emissions across the UK and Europe. This includes the roll-out of a new emissions standard for Euro 6 diesel cars and vans which is anticipated to be more successful at reducing pollutants in urban driving conditions than previous standards, and a forthcoming requirement for all vehicles to meet real world driving emissions tests²⁵. However, although it is expected that PM emissions will remain within legal limits, levels of NO₂ will continue to exceed the legal limits in some areas of Birmingham.

Further PM₁₀ and PM_{2.5} reductions by 2021 will mean that annual average concentrations should remain below the legal limits. However, there is a strong case to continue cutting PM concentrations to ensure health benefits, and a compelling need to accelerate the pace of change to achieve this even sooner in order to move towards meeting the WHO recommended guidelines.

The proportion of Birmingham City Centre where annual average NO₂ concentrations exceed the legal limit is also expected to decrease by 2020, due to anticipated reductions in background concentrations, ongoing upgrade of the local vehicle fleet and other local interventions. However, modelling indicates that, if nothing further is done, concentrations will continue to exceed the limit on some major roads in and around the City Centre, including the A38, A38M, A4400, A452 and A4540.

²⁴ Vehicle emissions are measured in terms of total NO_x. NO_x is made up of nitrogen oxide (NO) and NO₂, although the NO is subsequently converted into additional NO₂ by interaction with ozone in the atmosphere – this reaction being dependent on the availability of ozone.

²⁵ Please see appendix A for more details.

3.2 Areas of Exceedance

Whilst air quality remains a problem across Birmingham and the wider West Midlands conurbation, there are areas of the city centre where the problem is more pronounced than others. The modelled 2016 baseline concentrations are presented in Figure 2, showing wide spread exceedances across Birmingham.

Table 3-1 shows the estimated percentage of the length of major roads exceeding legal limits in Birmingham, derived from Defra's NO₂ projections data²⁶ based on the PCM model. In 2020, approximately 0.3 percent of roads in the city centre are forecast to still exceed the limit value for NO₂ with no CAZ in place.

Table 3-1 : Defra's Estimated Percentage of Modelled Road Length Exceeding Limits with No Further Action

Area	% of Road Length Exceeding Limit Values 2015	% of Road Length Exceeding Limit Values 2020
Birmingham City Council	1.13	0.34

²⁶ <https://uk-air.defra.gov.uk/library/no2ten/2017-no2-projections-from-2015-data>.

4. CAZ Options

4.1 Background to the Proposals

In order to meet the EU limit value for annual average NO₂ concentrations, Defra have set out an approach to introduce targeted local measures to tackle the most polluting vehicles in a number of air quality hotspots in a number of cities and primarily urban areas, including Birmingham²⁷. These measures are intended to reduce air pollution, particularly in urban centres, and to encourage the replacement of the older and most polluting vehicles with more modern, cleaner vehicles.

BCC has been directed by the Government to draw up a full business case for its local plan by 15 September 2018 because locations in the city exceed legal levels of NO₂. BCC needs to demonstrate that it is implementing policies to meet compliance in the shortest possible time, but ensuring that this is by 2020 at the latest.

It is intended that the implementation of a CAZ will be more than just putting into place an access restriction for vehicles; this would simply constitute a Low Emission Zone (LEZ). In principle, a CAZ should deliver wider benefits, supporting economic growth and accelerating the transition to a low emission economy by raising public awareness and providing financial incentives to accelerate transition.

In addition to any access restrictions, a CAZ should promote short-term improvements, such as anti-idling measures and allow for an open dialogue with local businesses about fleet turnover plans, travel plans and healthier travel. Longer term, a CAZ should help support local growth and low-emission ambitions – this could include awareness raising, an improved business environment due to the reduced levels of air pollution, and “low emission” new developments. A key part of a CAZ ambition will be to promote modal shift to cleaner and healthier forms of travel, with the CAZ providing a guide for where new investment in necessary infrastructure may be required.

4.2 Potential Options for Birmingham

BCC has commissioned Jacobs to undertake an initial CAZ feasibility study in order to consider what type of CAZ would help Birmingham to meet the EU Limit Values for NO₂ in the shortest possible time.

The CAZ is likely to involve a low emission zone, among other actions, to reduce emissions of nitrogen oxides (NO_x – oxides of nitrogen which are a pre-cursor to NO₂), as well as emissions of NO₂ and other pollutants. In the longer term, it is envisaged that a CAZ will help to improve human health and create a more pleasant environment – by introducing quieter vehicles (e.g. electric/hybrid) and potentially due to reduced traffic in some areas less related stress and accidents. Current proposals for Birmingham’s CAZ are focused on the City Centre, in the area within and including the Inner Ring Road (A4540).

The implementation of a CAZ scheme in Birmingham fits with the Movement for Growth 2026 Transport Delivery Plan produced by Transport for West Midlands (TfWM)²⁸; this in turn supports the West Midlands Combined Authority’s Strategic Economic Plan. Measures within these documents are designed to unlock economic growth opportunities and support wider initiatives to improve social well-being and lives of residents. A larger, more economically active population will have diverse transport needs and shifting attitudes to travel and travel behaviour. The implementation of a CAZ will capitalise on those shifts, as well as play a part in the need to transform Birmingham into a sustainable, low-emission city region. Implementation of a CAZ would also contribute towards Birmingham’s committed 60% reduction in carbon emissions by 2027 (based on a 1990 baseline) as road vehicle transport currently accounts for ~20% of carbon emissions in Birmingham²⁹.

This report contains an overview of the methodology, data sources and associated outcomes of the processes followed to calculate the vehicle emissions and resulting concentrations of NO₂ in the (2016) base year and (2020) future year scenarios. This technical evidence base has been used to design and evaluate a number of future CAZ options, and to identify what improvements could potentially be delivered at the implementation

²⁷ [UK Plan for Tackling Roadside NO₂ Concentrations. Detailed Plan](#), Defra/DfT (July 2017). Accessed January 2018.

²⁸ TfWM, Movement for Growth: 2026 Delivery Plan for Transport.

²⁹ BCC, Birmingham’s Green Commission-Building a Green City, 2013

stage. It also provides a summary of the outputs from the traffic and air quality modelling undertaken, which will inform the development of a wider air quality strategy for Birmingham. Initial considerations have assumed the introduction of policy targeting older vehicles with higher emissions, and the need to discourage non-complaint vehicles from entering the CAZ in order to meet air quality targets. Compliance standards have been based on the Euro-classification of vehicle engines similar to those adopted for London's Ultra Low Emission Zone (ULEZ) and the government's Clean Air Zone Framework³⁰. Proposed compliance standards for different vehicle types are shown in Table 4-1.

Table 4-1 : Proposed Classification Standards for Compliant Vehicles

Vehicle	Petrol	Diesel
Car	Euro Class 4 and above	Euro Class 6 and above
Taxi	Euro Class 4 and above	Euro Class 6 and above
Light Goods Vehicle (LGV)	Euro Class 4 and above	Euro Class 6 and above
Heavy Goods Vehicle (HGV)	-	Euro Class VI and above
Bus/ Coach	-	Euro Class VI and above

Defra has identified four classes for the implementation of CAZ's across the UK as per Table 4-2.

Table 4-2 : Defra CAZ classes

CAZ class	Vehicles included
A	Buses, coaches, taxis (Euro 6/VI).
B	Buses, coaches, taxis and HGVs (Euro 6/VI).
C	Buses, coaches, taxis, HGVs and LGVs (Euro 6/VI diesel and Euro 4 petrol).
D	Buses, coaches, taxis, HGVs, LGVs and cars (Euro 6/VI diesel and Euro 4 petrol).

In the absence of any specific guidance on proposed charge rates, this analysis of the impact of Category C and Category D CAZs in Birmingham City Centre has incorporated a range of hypothetical values based on the current London ULEZ rates. These are summarised in Table 4-3.

Table 4-3 Potential CAZ Charging Rates

CAZ	Proposed CAZ C Charge Rates			Proposed CAZ D Charge Rates		
	Low	Low	High	Low	Medium	High
Car	£0.00	£0.00	£0.00	£2.00	£6.00	£12.50
Taxi	£2.00	£6.00	£12.50	£2.00	£6.00	£12.50
LGV	£2.00	£6.00	£12.50	£2.00	£6.00	£12.50
HGV	£25.00	£50.00	£100.00	£25.00	£50.00	£100.00
Bus/ Coach	£25.00	£50.00	£100.00	£25.00	£50.00	£100.00

³⁰ [Clean Air Zone Framework. Principles for setting up Clean Air Zones in England](#). Defra. May 2017. Accessed June 2018.

5. Traffic Modelling Methodology

5.1 Introduction

The air quality modelling process followed a number of sequential steps to calculate the emissions from traffic into NO₂ concentrations. In addition to covering the area in and around the Inner Ring Road (A4540), the model also covered areas beyond the city centre, where it could reasonably be expected that the CAZ would have an impact on the road network as a result of diversion or reduction in traffic volume.

In order to provide input traffic data for the air quality model, traffic modelling was undertaken using a variety of data sources, research and existing modelling platforms to fully comply with Defra's Joint Air Quality Unit (JAQU) guidance; these included the following timeframes:

- 2016 Base Year Model
- 2020 CAZ Opening Year Model
- Average Weekday morning (AM) / Inter-Peak (IP) / Afternoon (PM) periods

The AM period covered 7:30 to 09:30, the IP period covered 09:30 to 15:30 and the PM period covered 15:30 to 19:00. Using these data, annual average daily traffic, and the off-peak (OP) period from 19:00 to 07:30 was also calculated.

The traffic model was developed and used to provide traffic for the air quality model, as well as supporting other assessments required for the CAZ evaluation. The model has been developed to forecast 2020 conditions without a CAZ, and also to evaluate the impact of CAZ measures on traffic levels. Outputs from the model were used in several ways:

- To forecast compliant/ non-compliant link flows, thereby enabling the AQ model to demonstrate levels of compliance with air quality limit values
- To generate inputs for the impact assessment (IA), cost benefit analysis (CBA) and the distributional impacts.

The main tools used in forecasting traffic flows in 2020 are summarised in Table 5-1.

Table 5-1 : Traffic Modelling Tools

Source	Description
BCC Simulation and Assignment of Traffic to Urban Road Networks (SATURN) Model	SATURN assignment model: <ul style="list-style-type: none"> • 2016 base year and 2020 CAZ scenarios • AM, IP and PM peak weekday periods • Car (taxis included in 2020 scenarios), LGV, HGV and Bus User Classes, split into compliant and non-compliant categories • Covers CAZ zone in detail, with network covering the "motorway box". Much of the network outside the CAZ is fixed speed (approx. 2km from the Ring Road) • Feeds traffic link flow data into the air quality models
Policy Responsive Integrated Strategy (PRISM) Demand Model	Regional demand model covering the West Midlands, maintained by Mott MacDonald on behalf of TfWM, BCC and other stakeholders. Inputs from PRISM are: <ul style="list-style-type: none"> • Base year prior matrices

Source	Description
	<ul style="list-style-type: none"> Traffic Growth from PRISM, having been updated with Trip End Model Presentation Program (TEMPRO) V7.0 demographic data (with post model adjustments to account for v7.2 changes). TEMPRO is software provided by DfT that provides data from their National Trip End Model (NTEM). To calculate non-route choice responsiveness to charging
Automatic number plate recognition (ANPR) Surveys	<p>A large programme of ANPR surveys carried out in the CAZ area. This has been used to:</p> <ul style="list-style-type: none"> Validate base year through trip proportions Calculate Euro Class fleet mix
TfL London ULEZ Behavioural Research	<p>TfL carried out a stated preference survey on car drivers in the extended ULEZ area covering an area not in the current congestion charging zone.</p> <p>Used to forecast vehicle upgrade rates from CAZ charging.</p>
Internet transport analysis guidance (WebTAG)	Modelling follows WebTAG guidance and uses various data sources
Defra's Joint Air Quality Unit (JAQU) Guidance	JAQU guidance and data sources used as appropriate

5.2 2016 Base Year Model

Forecasting utilised the 2016 base year BCC SATURN model, which was calibrated against 2016 traffic data. The base year fleet mix data was derived from ANPR surveys conducted in and around Birmingham City Centre. The survey was undertaken specialist data collection company, Intelligent Data Collection (ID) during a seven-day period in November 2016³¹. Cameras were installed at 29 unique locations, supplemented with a further 7 sites which are managed by an independent company, Amey, on behalf of BCC. Figure 3 illustrates the location of each site, with red sites representing cameras positioned around the city centre and blue sites representing a cordon of entry/exit points to the city centre.

The collection of vehicle registration plate data was then matched to the Driver and Vehicle Licensing Agency (DVLA) database, which provides further information about the vehicle, including a breakdown of different Euro Class emission standards by vehicle class.

The 2016 model results were audited by JAQU in August 2017 and approved for use within subsequent calculations.

5.3 2020 Do Minimum (DM) Scenario

The analysis of the 2020 do-minimum scenario involved an evaluation of how base year traffic flows would change by 2020 in the absence of a CAZ or any other currently unapproved schemes. This included a consideration of approved changes to the local road network, regional traffic growth and changes to the traffic fleet.

5.3.1 Road Network

A number of approved changes to the highway network are due to be implemented between 2016 and 2020. These changes, which are focused around the proposed City Centre CAZ area were agreed with BCC Transport Studies team and incorporated into the highway model.

³¹ City Centre Data Collection Report (QU043), Reference: ID02908, 11/04/2017, Issue 2.0

Discussions with Highways England (HE) indicated that schemes that are proposed to be in construction in the period from the end of 2020 are:

- M40-M42 Interchange
- M5/M42 Birmingham Box 4

While these roads are on the Birmingham Motorway Box, they are some miles outside of Birmingham and to the south where there are less air quality issues. The roadworks are therefore not likely to have any impacts on air quality within Birmingham, but BCC will work with HE to ensure that any issues with these roadworks are considered when implementing the scheme.

5.3.2 Traffic Growth to 2020

An evaluation of background traffic growth was undertaken using the PRISM model. This has been recently updated with TEMPRO V7.0 demographics, development locations and network assumptions, with further changes applied to account for changes between TEMPRO V7.0 and V7.2.

The sites of specific major developments within Birmingham were agreed with BCC development planners. Traffic impacts resulting from the demand at these developments was incorporated at the appropriate location within the model, whilst also ensuring that there is no double counting of developments already included in PRISM. The overall growth rates that resulted from this process are provided in Table 5-2.

Table 5-2 BCC Traffic Growth 2016 to 2020

Sector	AM Peak			Inter Peak			PM Peak		
	Car/ Taxi	LGV	HGV	Car/ Taxi	LGV	HGV	Car/ Taxi	LGV	HGV
City Centre	7.9%	10.8%	3.5%	8.0%	10.8%	3.6%	7.4%	10.8%	3.6%
Rest of Birmingham	3.7%	10.7%	3.2%	3.7%	10.7%	3.1%	3.7%	10.7%	3.1%
Birmingham (Total)	4.2%	10.7%	3.2%	4.2%	10.7%	3.2%	4.1%	10.7%	3.2%
Rest of West Midlands	4.4%	10.6%	2.9%	5.3%	10.7%	2.9%	4.6%	10.8%	3.0%
Total	4.3%	10.7%	3.0%	4.7%	10.7%	3.0%	4.4%	10.7%	3.0%

5.3.3 Traffic Fleet

Future year traffic fleet forecasts were based on guidance provided by JAQU. This enabled typical compositions of future CAZ compliant and non-compliant traffic fleets to be derived for further evaluation. The following assumptions were applied:

- National forecasts of how fleet proportions of petrol and diesel cars might change in future years were used to correct the local fleet proportions observed in the ANPR surveys. Conventional hybrid vehicles were included within the petrol and diesel car proportions when deriving these estimates.
- For other vehicle classes, the proportions of petrol and diesel vehicles were retained at the same levels as those observed in the ANPR surveys.
- It was assumed that the age distribution of vehicles will remain the same, but will increase in line with each additional year. This causes a natural increase in the proportion of compliant vehicles (i.e. a five-year-old car in 2020 will be of a higher Euro standard than a five-year-old car in 2016).

- It was assumed there will be no change to the contribution from the electric vehicle fleet beyond assumptions in Defra's Emission Factor Toolkit³², including plug in hybrids, battery electric or hydrogen vehicles, however this can be included in further evaluation once data becomes available.

Based on this evaluation, it was possible to estimate the number of compliant vehicles within the future 2020 do-minimum scenario. This forecast is summarised in Table 5-3.

Table 5-3 Non-CAZ Scenario Forecast Compliance Rate

Vehicle	% Compliance Status (See Table 4-1)	
	Non Compliant	Compliant
Car	23%	77%
LGV	41%	59%
HGV	35%	65%
Bus	40%	60%
Taxi	71%	29%

5.4 2020 CAZ Scenarios

It is assumed that there would be various potential responses to the introduction of charging for trips entering the city centre. This has been modelled hierarchically in the order shown in Table 5-4.

Table 5-4 Demand Response Hierarchy

Hierarchy	Response	Method
1	Upgrade to compliant/ switch to already owned compliant vehicles (for households with more than one car)	Choice Modelling based on TfL Stated Preference Research for Cars and LGVs
		Taxis and buses are assumed to upgrade through licencing agreements
		HGVs users assess value for money over 5-year period as part of decision on whether to upgrade
2 (Car only)	Cancel – do not make a journey	Elasticity to charge derived from PRISM run to apply to Do Minimum trips to/ from the City Centre.
	Change Mode to non-highway PT/ Walk/ Cycle option	
	Avoid (Change destination from City Centre to non-City Centre trips)	
	Pay (with a city centre origin/ destination)	
3	Avoid (through trips change route to non-City Centre route).	BCC CAZ assignment model to forecast diversion due to toll for through trips.
	Pay (through trips use City Centre)	

Traffic model development was conducted at the journey level to retain compatibility with the vehicle kilometre tables provided within the JAQU technical reports.

³² Emission Factor Toolkit V7.04. Defra (2017).

Vehicle owners that choose to upgrade to a compliant vehicle have been represented in the model by using TfL's behavioural research for the extended London ULEZ. This research is relevant to Birmingham as it covers an area that is currently free to drive in (rather than the congestion charging area), and therefore captures people that do not currently pay a charge. To ensure that the forecasts reflect local conditions, factors from the TfL research were re-weighted using Birmingham data in the following way:

- Usage frequency from the ANPR City Centre survey was grouped into low, medium and high frequency in accordance with the following classifications: high (4-7 days a week); medium (2-3 days a week); low (1 day per week)
- End-user income grouping within the PRISM model was classified as low, medium and high as defined by the following classifications: low <-£35k, medium £35k-£50k, high >£50k

The cost to upgrade is a required input to the model, which was calculated based on assumptions published in JAQU's technical appendix to the national air quality plan³³. This resulted in a calculated upgrade cost of £3,100. The following assumptions were applied:

- Users will change to the cheapest vehicle that is considered to be an upgrade (i.e. a diesel Euro 5 would upgrade to a petrol Euro 4 rather than a diesel Euro 6).
- The starting cost of a new car is taken as the most popular car in 2016, the Nissan Qashqai, costing £19,080 (new)
- Standard depreciation rates were applied to derive the cost of compliant cars and non-compliant cars for the different Euro Classes.
- An average sell cost and buy cost for Birmingham users was derived by using the age profile of the fleet taken from the ANPR survey.

This enabled the derivation of appropriate factors which could be applied to non-compliant trips into the City Centre in the Do Minimum model.

For the remaining proportion of users that won't upgrade to a new vehicle, the PRISM model was used to estimate what proportion of users with an origin or destination in the city centre would respond by:

- Paying the charge;
- Shift to a new mode;
- Cancel their trip; or
- Avoid the zone by travelling somewhere else.

It is worth noting that this final option is not applicable to those trips with an origin in the city centre.

The PRISM model was run with the charges set to the ULEZ value of £12.50. The PRISM model is not set up to be able to separate compliant and non-compliant vehicles, so could not be used directly to forecast the full responsiveness to the charge.

The PRISM demand model outputs provide a large set of demand responses in response to different model inputs, for example:

- Income segments
- Journey purposes
- Origin/ destination pairs with different highways, public transport, and walking / cycling times

An average elasticity to charge was calculated by analysing the changes in demand between Do Minimum and CAZ scenarios against the change in generalised costs of each potential City Centre journey. The generalised

³³ UK Plan for tackling roadside nitrogen dioxide concentrations, Technical report, Section E, JAQU, July 2017

costs were calculated as a sum of journey time costs, vehicle operating costs, charges and parking charges to ensure that costs other than the CAZ charge were considered in the choice.

The demand was also analysed within 3 different geographical segments depending on where the trip was generated. Trip generation refers to the home end of a trip, unless it is part of a trip chain, in which case it is modelled as an origin/ destination format. This approach is illustrated in Table 5-5.

Table 5-5 : Geographical Responses

Geography	Response
Trips Generated in the City Centre to outside the City Centre (CC to Non CC)	These trips can be cancelled, pay the charge or change mode. No change in destination assumed.
Trips Generated in the City Centre to inside the City Centre (CC to CC)	For home based trips, no change assumed as there would no way to charge them.
	For non-home based trips, mode shift or cancelled trip assumed.
Trips Generated outside of the City Centre to inside the City Centre (Non CC to CC)	Pay the charge, mode choice, cancel trip, and change destination is modelled.

The analysis was conducted at two journey purpose levels to retain compatibility with the assignment mode:

- Non Work; and
- In Work

Overall, the model responded sensibly, demonstrating that more people were prepared to pay the charge at lower levels. The mode shift response is small, which indicates that the majority of existing car users either do not have a good public transport alternative or have strong preference. The challenge therefore will be ensuring that, within the Additional Measures programme, good public transport alternatives are explored.

To apply these responses to the City Centre assignment model, adjustments were made as per Table 5-6.

Table 5-6 : Application of Responses to Assignment Model

Response	Modelled
Upgrade Vehicle	The compliant user class is uplifted and the non-compliant reduced
Mode Shift	The non-compliant car trips to/ from the City Centre are reduced
Cancel Journey	The non-compliant car trips to/ from the City Centre are reduced
Change Destination	The non-compliant trips to/ from the city centre are redistributed to outside so that neither trip end is in the City Centre, using the existing demand distribution from the appropriate origin/destination zone outside the city centre

For through trips, non-compliant through trips were modelled using route choice in the assignment model. Charges were coded onto links forming a cordon into and out of the City Centre. As the charge is only used for route choice it was only applied in the inbound direction to avoid double charging. Values of time were addressed by converting charges into a generalised journey time, with the model forecasting whether users were prepared to pay for the time savings of making a through trip.

Assumptions used in the transport modelling of other vehicle classes are summarised in Table 5-7.

Table 5-7 : Assumptions Used in Modelling Various Vehicle Types

Vehicle Type	Assumptions Made
Taxi/ Private Hire Vehicles (PHVs)	It was assumed that all Birmingham registered taxis and PHVs will upgrade to compliant vehicles, based on policy being developed by BCC.
LGV	<p>LGVs were assumed to respond by:</p> <ul style="list-style-type: none"> • upgrading their vehicle; • pay the charge and continuing to drive into the CAZ; or • through the route choice for through trips. <p>TfL's ULEZ behavioural model was used to forecast the response to upgrading the vehicle. It was assumed that LGV users' behaviour will more closely reflect car users than HGV users, due to the following:</p> <ul style="list-style-type: none"> • The charges and upgrade costs are similar. • The costs used are based on JAQU costings published in their technical report supporting the UK Plan for Tackling Roadside Nitrogen Dioxide Concentrations³⁴.
HGV	<p>The approach compared the cost to upgrade over a 5-year period against the cost of paying a charge throughout this period. The costs involved both in upgrading, the charge paid, and the value of the business being carried out, is considerably higher than for the lighter vehicle classes. Users are therefore likely to take a longer-term outlook on whether to upgrade their vehicle.</p> <ul style="list-style-type: none"> • Compliance rates were calculated by applying the following assumptions: • Depreciation Rates from JAQU • Users will upgrade to cheapest available option • Frequency taken from the ANPR survey data, with assumptions of how the vehicle counted once in the week are distributed across the year. • The costs were calculated for rigid and artic separately with proportions in the ANPR surveys used to derive the fleet proportions to apply these assumptions to.
Bus	The effect of CAZ charges on buses was not explicitly modelled as it was assumed that all buses in the CAZ will be compliant, with an out of model adjustment made when applying the results in the AQ model.
BCC Fleet	It was assumed that the full Birmingham fleet will be made compliant. However, using number plate data provided by BCC and matching against the ANPR surveys showed that the proportion of the fleet within the traffic model was too small to include specifically within the modelling. Measures for staff owned vehicles would be an additional measure, and would be considered at a later stage in the study.

Full traffic model runs were completed for CAZ C and CAZ D for three pricing levels for both CAZ types.

- A summary of the timeframes evaluated is provided below:
 - AM Peak Weekday Average Hour (07:30-09:30)
 - Inter Peak Weekday Average Hour (08:30-16:30)
 - PM Peak Weekday Average Hour (16:30-19:00)

³⁴ UK Plan for tackling roadside nitrogen dioxide concentrations - Technical report, DEFRA/ DfT July 2017

- Additionally, the following scenarios were evaluated:
 - 2016 Base Year
 - 2020 Do Minimum
 - 2020 CAZ C- Low charge, medium charge, high charge
 - 2020 CAZ D- Low charge, medium charge, high charge

The key metrics used to assess the impacts of the CAZ are summarised as follows:

- Annual Average Daily Flows (AADT) entering the CAZ for compliant and non-compliant flows. This shows the numbers of vehicles driving across the CAZ boundary each day by vehicle type in the different scenarios.
- Network Plots – Showing change in flows graphically across the modelled links to see where flows are increasing and decreasing. Also includes analysis of change in link delay.
- Key Link Analysis – Tables showing changes in flows at key network links at the all-day level
- Network Statistics – Change in vehicle kilometres and average network speed. This provides an aggregate measure of change in network conditions and has been provided by different modelled areas.

Outputs from the traffic modelling process were used to produce inputs for a range of air quality models including:

- 2016 Base Year for model verification
- 2020 Do Minimum (baseline)
- 2020 CAZ C- high charge
- 2020 CAZ D- medium charge, high charge
- 2020 CAZ C- high charge plus additional measures
- 2020 CAZ D- high charge plus additional measures

6. Outline of The Air Quality Modelling Process

6.1 Traffic Data, Fleet Mix and Emissions

Modelled traffic data outputs produced using BCC's Saturn model covered the road network area as shown in Figure 4. The traffic model contains differing level of density of road network coding, with detailed junctions in the centre and speed flow curves used further out, and beyond this the fixed speed 'buffer' area. The buffer area is not validated as part of the Saturn model development process (although the demand flows in PRISM regional transport model are, which is the source for the traffic demand in the BCC model) and therefore traffic data in these locations are considered less reliable.

The approach to the transport modelling, and Saturn spatial coverage was initially developed to address the government requirements based on the 2015 Pollution & Climate Mapping (PCM) modelling, which identified exceedance in Birmingham city centre only. The PCM model is the government's national air quality model which predicts air quality on the major road network across the UK, and reports on the compliance status to the European Commission.

Following the issue of updated PCM model data in July 2017, JAQU identified potential link exceedances in the 2020 forecasts beyond the city centre. Some of these links were located within the Saturn model buffer zone. The transport modelling approach was subsequently approved by DfT/JAQU, recognising that certainty in the model outputs would be reduced. The air quality modelling in this location is compared with monitoring data, and a verification process applied. However, it is not considered to contain the same level of confidence in results. BCC intends to update and improve the transport modelling to cover these areas of exceedance risk as the project progresses.

Additional analysis of the PCM exceedance links in the Saturn model buffer zone has been undertaken comparing all day traffic flows provided from the BCC model for input into the AQ model against DfT traffic counts. This was undertaken at locations close to the PCM exceedance links on Tyburn and Chester Roads and are shown in Table 6-1. Given that the model has not been calibrated in the buffer area, the modelled flows are relatively close to the observed values, and provides some reassurance that traffic conditions are reasonably accurate on these external exceedance links.

Table 6-1 : Annual Average Daily Traffic Flows 2016

Road	Modelled Vehicles	Counted Observed Vehicles	Difference	% Difference
Tyburn Rd (A38 East of M6 junction)	30,688	33,699	- 3,011	-9%
Chester Rd (North of M6)	53,041	49,661	3,380	7%

Traffic modelling was based on ANPR data collected in September 2016, with additional data fields added by JAQU from sites inside the Inner Ring Road of Birmingham. This data has combined with licence data for Hackney Carriages and Private Hire Vehicles (although limited to BCC licensing) and buses.

This data was processed to develop the Euro Standards by class. The analysis indicates that the fleet was older than the national fleet defaults used by Defra's Emission Factor Toolkit (EFT v7.4a) for all vehicle categories, except for diesel LGVs where there was a greater spread in the vehicles ages, including more new diesel LGVs. However, once projected to 2020 the overall effect was that all vehicle categories were older (fewer vehicles of the latest Euro standard) in the local fleet compared to the forecast national average. The fleet mix profiles as input to EFT are presented in Appendix B.

Traffic data from Saturn were provided for the following categories:

- Buses (includes coaches)
- HGVs
- LGVs
- Hackney Carriages
- Private Hire Vehicles (PHV)
- Cars

All have been disaggregated into compliant and non-compliant vehicles defined by the CAZ Framework, and cars/Hackney carriages/PHV have been further disaggregated to petrol and diesel fuel types.

ANPR data has been used to develop age and Euro class profiles for each vehicle type/fuel, along with rigid/articulated splits for HGVs.

The emissions of NO_x, PM₁₀ and PM_{2.5} were calculated for each traffic model period, so that speeds in congested periods were represented. EFT v7.4a (Detailed Option 3) was used to calculate emissions by vehicle type. Hackney carriages and PHVs were included in the car flows, although the age profiles were recorded separately to enable CAZ interventions on these vehicles to be modelled specifically in the CAZ scenarios. The Advanced Options for Euro Compositions outputs was used to determine the proportion of emissions from every link by vehicle type and Euro class based local fleet mixes for the relevant year. These Output % Contributions from Euro Classes were combined with National Atmospheric Emissions Inventory (NAEI) f-NO₂ vehicle types³⁵ to develop link specific f-NO₂ for every Road link, and the total NO_x and f-NO₂ (as NO₂) emissions were input to the dispersion model. The outputs of the dispersion model for NO_x and NO₂ at every monitoring site and receptor could be used to calculate the f-NO₂ for every output location.

6.2 Air Quality Modelling Set-Up

To model air quality, BCC use the Airviro modelling software produced by the Swedish Meteorological and Hydrological Institute (SMHI) and Apertum. The Airviro model was set up to model dispersion of pollutants across a 10m x 10m grid at 2m elevation. The specified locations for receptors and monitoring were then produced by Airviro based on 'kriging' (mathematical interpolation) of the exact grid reference within the 10m grid square. Locations where the EU Limit Values apply are defined in Annex III of the Air Quality Directive. These are defined by sites where the public could be reasonably present, and should be at least 25m from major junctions and be representative of at least 100m road length. The receptor is set 4m back from the road edge, and all PCM roads links are included. Additional receptors were then added where worst-case exposure might occur based on LAQM.TG (16)³⁶ guidance for relevant annual mean exposure, including at roads not included in the PCM model.

Meteorological data for 2016 from Birmingham Airport was used for the assessment, which was converted to a statistical meteorological dataset to reduce runtimes by SMHI. The wind rose for the meteorological data is shown in Figure 5.

6.3 Air Quality Monitoring Data

A total of 99 monitoring sites were reviewed for the model verification process, which compares the model predictions with the measurements of air quality in Birmingham.

There are 7 continuous analyser sites located in Birmingham, with 3 sited at background locations and 4 located at roadside locations. However, only one continuous analyser site is located in the city centre at Moor St Queensway, which recorded 52 µg/m³ NO₂ as an annual mean in 2016.

³⁵ http://naei.beis.gov.uk/resources/PrimaryNO2_factors_NAEIBase_2016_v1.xlsx

³⁶ [Local Air Quality Management Technical Guidance \(LAQM.TG \(16\)\)](#). Defra. April 2016. Accessed January 2018.

The positions and measured concentrations of the sites are summarised in Figure 6, and clearly indicate a wide range of exceedances of the 40 $\mu\text{g}/\text{m}^3$ EU Limit values, with measured values at some diffusion tube sites exceeding 70 $\mu\text{g}/\text{m}^3$ NO_2 . This evidence supports the mandate for taking urgent and effective action across the City Centre at the earliest opportunity.

Diffusion tubes were supplied and analysed by Gradko International. Monitoring data for 2016 was collated by BCC and a local bias adjustment factor of 0.818 was calculated at Stratford Road, and 0.799 at Tyburn Road background site. These factors show good agreement with the Gradko national diffusion tube survey results. These factors were applied to the 2016 annual mean diffusion tube data for roadside and background sites respectively, which was consistent with the approach used for LAQM reporting in previous years. Measured concentrations at roadside sites with good data capture in 2016 ranged from 29 to 67 $\mu\text{g}/\text{m}^3$.

The diffusion tube data was used for verification, and Road NO_x back calculated using the Defra NO_x to NO_2 calculator v 5.3, with calculated f- NO_2 from the dispersion modelling input for each site.

Monitoring at sites BMH66 to BMH93 was initiated in September 2016, with data available up to July 2017 at the time of verification. The use of four months of data from 2016 would normally be considered inappropriate for use in verification, however, because these sites have been deployed in the vicinity of the road links used in the PCM, they could provide additional information to input to the assessment process. The monitoring data from these sites were therefore annualised using the relationships of other Roadside tubes in the BCC survey for locations running from January 2016 to July 2017.

6.4 Background Air Quality Data

Defra 2013 based background maps have been adjusted in accordance with JAQU guidance, and then the total NO_x and NO_2 concentrations were compared with values recorded at background monitoring sites during 2016. Overall, good agreement was found, and no further adjustment considered necessary.

The NO_x maps were then processed in order to remove contributions from all roads in each sector, apart from the minor road component, and the NO_2 concentrations were recalculated using the Defra NO_2 -Adjustment-for- NO_x -Sector-Removal-Tool.

6.5 NO_x Chemistry

The conversion of modelled Road NO_x to NO_2 was undertaken using the Defra NO_x to NO_2 calculator v5.3. The dispersion model used link specific f- NO_2 emissions, modelled as NO_2 . The modelled annual mean Road NO_x and f- NO_2 for each output point were put into the calculator so that a location specific f- NO_2 was applied.

6.6 Model Verification

Model verification is the process for comparing the modelled pollutant concentrations with the monitored concentrations for the same pollutant, and where necessary, adjusting the modelled results so they better align with the monitoring data. Given the complexities inherent throughout the model verification process, JAQU and Defra have provided specific guidance to inform this process and assist in the generation of robust data sets.

The AQ modelling outputs were converted to NO_2 and then compared to the monitoring data. Only road traffic sites with data capture greater than 75% were used in the verification process, with calendar year data for 2016. A total of 44 sites were selected for the verification process.

Full details of the verification process are provided in Appendix C.

Model verification was undertaken in accordance with Defra's technical guidance document LAQM.TG (16); this involved initial adjustment of Road NO_x , with a secondary adjustment factor being applied to the calculated Road NO_2 concentration. The adjusted results were then compared with the monitoring data, which demonstrated improved model performance consistent with the guidance in LAQM.TG (16).

7. Air Quality Modelling Results

7.1 Baseline Evaluation and Comparison with PCM

Local baseline air quality modelling has shown that the air quality issues identified are broadly in line with the national PCM information issued in the National Air Quality Plan with regard to the locations of exceedance of the NO₂ annual mean limit value of 40 µg/m³. It should be noted that the PCM model does not include minor roads, notably those within the city centre.

The results of the BCC (local) modelling are displayed in Figure 7, and PCM data for 2020 is provided in Figure 8.

Comparison of the local modelling results for 2020 with the full PCM results shows reasonable agreement between the numbers of locations exceeding the NO₂ annual mean limit value of 40 µg/m³.

Further evaluation of a number of selected points was carried out during the comparison of modelling results (Figure 9).

The A38/A4400 Queensway link (PCM_153, Census ID: 81493) yields the highest concentration of 50.5 µg/m³ in the full PCM model, compared with a predicted concentration of 46.5 µg/m³ in the local model.

The maximum recorded concentration at a PCM receptor point in the local Airviro modelling is further south on the A4400 (PCM_0, Census ID: 81490). A value of 44.1 µg/m³ was predicted by the Full PCM model, however the local modelling generated a concentration of 48.8 µg/m³. The local road network in the vicinity of this PCM link is complex so direct comparison is difficult.

The maximum modelled concentration generated by the local model at a non-PCM site (49.4 µg/m³) was located at a receptor point in Digbeth (ObjectID_15_@4m), however this receptor point is not included in the PCM model.

Other locations with similar levels of predicted concentrations occur on the A4540 Watery Lane Middleway (PCM_6, Census ID: 27736) on the east side of the Inner Ring Road. A value of 46.9 µg/m³ generated by the local model corresponded with a PCM value of 43.0 µg/m³.

Outside of the city centre, the local modelling does not identify exceedances at the PCM link on the A38 Tyburn Road (Non_PCM_8, Census ID: 16365). The PCM modelling predicts an exceedance (43.2 µg/m³), but the local modelling reports a value of 39.0 µg/m³. Similarly, the PCM exceedance in northeast Birmingham on the A452 Chester Road (PCM_159, Census ID: 99234) of 45.8 µg/m³ corresponds with a value of 38.6 µg/m³ predicted by the local model.

However, the local modelling identifies an exceedance at the PCM link on the A5127 Lichfield Road close to the M6 (PCM_60, Census ID: 46398). A value of 40.5 µg/m³ was reported, which corresponds to a value of 33.3 µg/m³ in the PCM modelling. The local topography and exposure at this location will be reviewed.

The link outside the city centre referred to above is located in the traffic model Buffer zone, so should be treated with additional caution.

7.2 2020 DM Baseline

Local baseline air quality modelling has shown that the air quality issues identified are broadly in line with the national PCM information issued in the National Air Quality Plan with regard to the locations of exceedance of the NO₂ annual mean limit value of 40 µg/m³. It should be noted that the PCM model does not include minor roads, notably those within the city centre (Figure 7). The results of the BCC (local) modelling are displayed in Figure 8, and PCM data for 2020 is provided in Figure 9

Evaluation of the 2020 DM baseline (as described in Section 7.1) indicated the full extent of predicted exceedances in and around the city centre in the absence of any additional interventions. A breakdown of vehicle emissions or 'source apportionment' was undertaken at a number of specific receptor points inside and outside the CAZ boundary to provide specific information on the emission sources contributing to each exceedance which need to be targeted by the respective CAZ scenarios (Figure 10).

The respective source apportionments indicate significant contributions from a number of vehicle classes as summarised in Table 7-1 below:

Table 7-1 : Summary of 2020 DM Source Apportionment Results

Site Location	% Contributions From Respective Vehicle Classes					
	Diesel Cars	Petrol Cars	Diesel LGVs	Rigid HGVs	Artic HGVs	Buses & Coaches
A4400 Suffolk St. Queensway	53	6	25	14	2	0
A38 Corporation St	54	6	22	13	2	3
A4540 Lawley Middleway- Garrison Circus	42	5	21	28	4	0
A4100 Moat Lane, Digbeth	25	3	8	13	2	49

Evaluation of two specific CAZ scenarios provided an opportunity to evaluate the impacts of targeting specific vehicle classes as part of a wider strategy, with specific focus on reducing emissions from diesel vehicles. These are clearly indicated as the predominant source of emissions in each of the areas evaluated above, apart from the A4100 (Moat Lane, Digbeth), which is populated with predominantly buses and coaches.

7.3 Basic CAZ Scenarios

The following CAZ scenarios were closely examined in order to provide a comparison against the 2020 DM baseline:

- 2020 CAZ C- high charge
- 2020 CAZ D- medium charge, high charge

Further evaluation of this data was carried out to assess the impacts at a number of key locations and a summary is provided in Table 7-2. The full results of the initial dispersion modelling for 2020 are provided in Appendix D.

Table 7-2 : Summary of Modelled Air Quality CAZ Scenarios

Receptor	Position	Easting	Northing	Census ID	Road	Modelled NO ₂ Concentration (µg/m ³)		Additional Reduction in Road NO _x Required (After CAZ C High)	Modelled NO ₂ Concentration (µg/m ³)		Additional Reduction in Road NO _x Required (After CAZ D high)
						DM	CAZ C High		CAZ D Medium	CAZ D High	
PCM_0	Inside Ring Road	406752	286515	81490	A4400 Suffolk St. Queensway	48.8	45.0	-31%	43.5	42.7	-19%
PCM_2	Inside Ring Road	407477	287785	56394	A38 Corporation St.	46.6	42.6	-18%	41.3	40.6	-7%
PCM_6	Outside Ring Road	408473	286918	27736	A4540 Watery Lane Middleway	46.9	41.8	-11%	41.7	41.4	-9%
Non_PCM_10	Inside Ring Road	407458	286475	N/A	Moat Lane	46.4	41.5	-11%	40.8	40.3	-4%

7.3.1 CAZ C (High Charge)

Initial evaluation of the results indicates that a number of locations within the CAZ boundary will still remain above the NO₂ objective concentration in 2020 (Figure 11).

Whilst modelling shows an improvement in overall emissions compared to the 2020 baseline scenario, this option does not achieve a large enough emissions reduction to deliver compliance with EU Limit Values. In 2020, predicted concentrations still exceed the NO₂ Limit Value at 19 modelled receptor locations, including the A38 and Ring Road (compared with 41 exceedances in the Do-Minimum scenario).

The highest modelled concentration of 45.0 µg/m³ NO₂ corresponds to receptor PCM_0 at A4400 Suffolk St. Queensway (Census ID 81490).

Source apportionment at each of the locations highlighted in Table 7-2 has been undertaken to provide specific information on the emission sources and further reductions in NO_x required to deliver compliance (Figure 12).

As expected, comparison between the CAZ C High and the 2020 DM Scenarios indicates a reduction in percentage contributions from LGV and HGV vehicle classes, and an increase in percentage contributions from petrol and diesel cars, which are not charged within the CAZ C Scenario. The respective vehicle contributions towards emissions in each of these areas are summarised in Table 7-3 below:

Table 7-3 : Summary of 2020 CAZ C High Charge Source Apportionment Results

Site Location	% Contributions From Respective Vehicle Classes					
	Diesel Cars	Petrol Cars	Diesel LGVs	Rigid HGVs	Artic HGVs	Buses & Coaches
A4400 Suffolk St. Queensway	68	8	21	3	0	0
A38 Corporation St	68	8	20	3	1	0
A4540 Lawley Middleway- Garrison Circus	42	5	22	25	6	0
A4100 Moat Lane, Digbeth	48	5	14	8	2	23

In order to deliver full compliance following implementation of a CAZ C high charge scenario, additional reductions in NO_x of between 11 and 31% are required (outside and inside the CAZ respectively, see Table 7-2 and Figure 12).

Unlike other vehicle types, modelling suggests that 17% of LGV drivers with non-compliant vehicles will be prepared to pay the higher charge rather than upgrade. However, current projections indicate that even if 100% of LGVs were of Euro 6 standard, this would not reduce emissions sufficiently to meet the EU Limit value for NO₂.

Approximately 70% of vehicle emissions inside the CAZ originate from diesel cars. Under the CAZ Scenario C, there are no charges applied to cars, and therefore no significant change in compliance rates within the CAZ, but there are small increases in car through traffic due to improvement in journey time. Under this scenario, buses and taxis are assumed to have upgraded via licensing agreements.

7.3.2 CAZ D (Medium Charge)

Initial evaluation of the results indicates that a number of locations within the CAZ boundary will still remain above the NO₂ objective concentration in 2020, although a number of minor improvements are observed in comparison with the CAZ C Medium Charge Scenario (Figure 13).

This scenario further improves air quality by reducing emissions from diesel cars, but the medium charge level means that a significant proportion of drivers are likely to pay the charge, rather than upgrade their vehicles.

Whilst modelling shows an improvement in overall emissions compared with CAZ C High, this option does not achieve a large enough emissions reduction to deliver compliance with EU Limit Values. In 2020, predicted concentrations still exceed the NO₂ Limit Value at 16 modelled receptor locations, including the A38 and Ring Road.

The highest modelled concentration of 43.5 µg/m³ NO₂ again corresponds to receptor PCM_0 at A4400 Suffolk St. Queensway (Census ID 81490).

7.3.3 CAZ D (High Charge)

Initial evaluation of the results from the CAZ D High Charge Scenario indicates that a number of locations within the CAZ boundary will still remain above the NO₂ objective concentration in 2020 (Figure 14).

This scenario further improves air quality by reducing emissions from diesel cars, and the higher charge rate is likely to generate greater uptake of newer compliant vehicles. However, in 2020, predicted concentrations still exceed the NO₂ Limit Value at 12 modelled receptor locations, including the A38 and Ring Road.

The highest modelled concentration of 42.7 µg/m³ NO₂ corresponds to receptor PCM_0 at A4400 Suffolk St. Queensway (Census ID 81490).

Compared to the CAZ C High charge scenario, NO₂ concentrations are predicted to reduce by an additional 1.8 µg/m³ with a CAZ D high charge.

Based on the predicted diesel car fleet for 2020, diesel car drivers upgrading from non-compliant to compliant vehicles will typically experience a ~25% reduction in NO_x emissions per car. The willingness to pay by LGV drivers remains unaffected from the CAZ C scenario. Under these conditions, approximately 59% of vehicle emissions inside the CAZ will still originate from diesel cars. This is illustrated in Figure 15, which provides a source apportionment at each of the locations highlighted in Table 7-2.

As expected, the respective source apportionments indicate significant reductions in contributions from diesel cars and petrol cars in comparison with the CAZ C High scenario, as these are now included within the charging structure. General emission contributions from the various vehicle classes are summarised in Table 7-4 below:

Table 7-4 : Summary of 2020 CAZ D High Charge Source Apportionment Results

Site Location	% Contributions From Respective Vehicle Classes					
	Diesel Cars	Petrol Cars	Diesel LGVs	Rigid HGVs	Artic HGVs	Buses & Coaches
A4400 Suffolk St. Queensway	56	11	28	4	1	0
A38 Corporation St	58	11	26	4	1	0
A4540 Lawley Middleway- Garrison Circus	42	5	22	25	6	0
A4100 Moat Lane, Digbeth	39	6	17	9	2	27

In order to deliver full compliance following implementation of a CAZ D high charge scenario, additional reductions in NO_x of between 4 and 19% are required (outside and inside the CAZ respectively, see Table 7-2 and Figure 15).

It can therefore be concluded that additional mitigation measures would be required to support a potential charging CAZ scheme in order to achieve compliance within the shortest possible timescale.

7.4 CAZ Plus Additional Measures

7.4.1 Overview

Additional Measures are a series of supporting interventions identified to support a potential charging CAZ scheme in delivering compliance. They will take into account the outputs of the CAZ traffic and air quality modelling and using the appraisal process they identify which interventions are likely to close the emissions compliance gap between the target of annual mean concentration levels of 40µg/m³ for NO₂ and the levels modelled.

The measures have been chosen to consider the source apportionment data provided above and the potential type of CAZ that will be implemented. The measures must support the implementation of CAZ to achieve compliance in the shortest time possible.

Table 7-2 indicates how much the traffic emissions must be reduced by to further improve air quality and deliver compliance. A range of additional measures have been proposed for further testing and refinement. The additional measures are aimed at reducing emissions from vehicles and encouraging modal shift from car to bus with either the CAZ C high or CAZ D high scheme in place. The package of measures evaluated is summarised in Table 7-5.

Table 7-5 : Package of Additional Measures

Type	Summary	Comments	Recommended for further consideration?
Fleet Upgrades	Fleet 1: <ul style="list-style-type: none"> 85 Hackney Carriage Upgraded to Electric vehicles 441 Private Hire Vehicles Upgraded to Electric Vehicles 65 Hackney Carriages retrofitted to LPG 	Assumptions agreed with BCC. An electric vehicle upgrade is estimated to remove 1.6% of total vehicle kilometres from the City Centre network in a CAZ D scenario. Given that taxis and PHVs are upgraded, the AQ impacts are reduced.	Yes
	Fleet 2: Zero emission buses (new Hydrogen buses)	It is assumed that these will be used to add additional capacity on specific routes (so no change to emissions from CAZ Scenarios). If we assume no increases in numbers of buses running, this could be applied to specific bus corridors to reduce bus emissions, e.g. Digbeth.	Yes
Parking	Remove all free parking from BCC controlled areas. Replace with paid parking spaces. Assume cost of parking in line with BCC off-street parking.	Around 15% of traffic parking in the City Centre currently parks on free on street parking. Transport modelling indicates that this will reduce car demand with free parking by around 30%. This leads to around a 2.5% reduction in overall vehicles kilometres, resulting in a reasonably significant reduction in emissions, although this is limited in the key locations (failing the legal limits) as the impacts are focused on the outer areas of the City Centre. An additional benefit is that it raises revenues of the City Centre which will be re-invested in mitigating the effects of the CAZ.	Yes
Network Changes	Network 1: Ban traffic entering (southbound) or leaving (northbound) Suffolk Street Queensway (A38) from Paradise Circus, other than local access.	Provides a reduction in overall traffic levels and reduces delays on the A38 at a key exceedance location. Reduces traffic through Paradise Circus an area with high pedestrian flows linking one of Birmingham's main cultural quarters, to the shopping/ business district and New Street Station. Paradise is the focus of one the city centre's main masterplan areas, so removing traffic will support this regeneration.	Yes
	Network 2: Close Lister Street and Great Lister Street at the junction with Dartmouth Middleway.	Reduction in delay on the A4540 ring road, including less traffic needing to stop (and accelerate away from the junction) due to the removal of the signal stage for traffic crossing the road. This also provides a mitigation for increases in traffic caused by the CAZ charge for through trips on the A38.	Yes
	Network 3: Ban on CAZ through trips for all vehicle types.	Provides significant improvement to air quality in the City Centre. However, this causes significant increases on the Eastern section of the ring road which exceeds the legal NO2 limits. In addition, the model shows large increases on local roads outside of the CAZ area which worsens AQ on these local residential roads. There are also issues with the practicality of implementing this option on the ground.	No
	Network 4: Ban on CAZ through trips for LGV and HGV vehicles. CAZ C or D on the Eastern section of the ring road.	As Above.	No

Type	Summary	Comments	Recommended for further consideration?
	Network 5: CAZ C or D on the ring Eastern section of the ring road.	Significant diversion to local roads outside the CAZ, increasing emissions on these smaller residential roads. There is a need to reduce overall traffic (not just non-compliant) to meet compliance so the CAZ does not solve the issue on its own. On the worst road, even if all non-compliant vehicles were removed the road would still be non-compliant due to weight of traffic	No
Public Transport	4 improved bus corridors agreed with TfWM (see Figure 16). Potential delivery by 2020.	Impact on mode shift forecast to be small, less than 1% reduction in overall trips into the City Centre, with high costs to implement.	No

Modelling of the package tests alongside both CAZ C High and CAZ D High scenarios has been completed in order to assess their effectiveness and determine the relative impacts.

A summary of the results of the initial dispersion modelling for 2020 are provided in Table 7-6 and the full modelling results are presented in Appendix E. Percentage changes in NO₂ concentrations are presented for each Additional Measure + CAZ scenario compared with the respective CAZ scenario baseline.

Table 7-6 : Summary of Dispersion Modelling Results from Additional Measures Packages

Receptor	Position	Easting	Northing	Census ID	Road	Modelled NO ₂ Concentration µg/m ³					% NOx Reduction Required After CAZ C High + Additional Measures	% NOx Reduction Required After CAZ D High + Additional Measures
						2020 DM	2020 CAZ C High	2020 CAZ D High	2020 CAZ C High + Additional Measures	2020 CAZ C High + Additional Measures		
PCM_0	Inside Ring Road	406752	286515	81490	A4400 Suffolk St. Queensway	48.8	45.0	42.7	45.1	42.7	-31%	-19%
PCM_2	Inside Ring Road	407477	287785	56394	A38 Corporation St.	46.6	42.6	40.6	42.3	40.3	-15%	-3%
PCM_6	Outside Ring Road	408473	286918	27736	A4540 Watery Lane Middleway	46.9	41.8	41.4	42.0	41.5	-14%	-11%
Non_PCM_10	Inside Ring Road	407458	286475	N/A	Moat Lane	46.4	41.5	40.3	39.9	38.9	N/A	N/A

7.4.2 CAZ C High Plus Additional Measures

The outputs from this scenario are summarised in Table 7-7 and Figure 17 and show significant improvements when the additional measures are implemented alongside the CAZ C High scenario, reducing the total number of exceedances from 19 to 17 (See Appendix E).

The maximum modelled concentration of $45.1 \mu\text{g}/\text{m}^3$ at Suffolk St Queensway (PCM_0, Census ID 81490) indicates a slight increase at this receptor. Here, it is considered that the local road network in the vicinity of this PCM link is complex, so direct comparison with the PCM network remains difficult. Other locations on the A38 demonstrate reductions from 0.1 to $0.3 \mu\text{g}/\text{m}^3$ in NO_2 , and additional exceedances are observed along the A38.

Beyond the A38, the other location demonstrating an exceedance inside the CAZ is at Digbeth. Here, LAQM (non-PCM) exposure is at the first floor level, so the modelled outputs at ground level are likely to be an overestimate, and the exposure isn't likely to be realistic. At this receptor, significant reductions of up to $1.8 \mu\text{g}/\text{m}^3$ NO_2 are predicted (ObjectID_15_@4m).

NO_2 concentrations along the Ring Road at A4540 Lawley Middleway - Garrison Circus (PCM_6, Census ID 17998) increase from $41.8 \mu\text{g}/\text{m}^3$ to $42.0 \mu\text{g}/\text{m}^3$ (an increase of ~1% on CAZ C High with no additional measures). Further north, on the A4540 at Dartmouth Middleway (PCM_4, Census id 7676), NO_2 concentrations are reduced by ~1% from $41.7 \mu\text{g}/\text{m}^3$ to $41.2 \mu\text{g}/\text{m}^3$.

The respective source apportionments are summarised in Figure 18, which indicate significant contributions from a number of vehicle classes as summarised in Table 7-7 below.

Table 7-7 : Summary of CAZ D High Charge Plus Additional Measures Source Apportionment Results

Site Location	% Contributions From Respective Vehicle Classes					
	Diesel Cars	Petrol Cars	Diesel LGVs	Rigid HGVs	Artic HGVs	Buses & Coaches
A4400 Suffolk St. Queensway	67	8	21	3	1	0
A38 Corporation St	68	8	20	3	1	0
A4540 Lawley Middleway- Garrison Circus	43	5	23	23	6	0
A4100 Moat Lane, Digbeth	50	5	12	5	1	27

In order to deliver full compliance following implementation of a CAZ C high charge with additional measures scenario, additional reductions in NO_x of between 14 and 31% are required (outside and inside the CAZ respectively, see Table 7-6 and Figure 18). Receptor Non_PCM_10 (A4100 at Digbeth) is fully compliant under this scenario, so no further reductions in NO_x are required.

7.4.3 CAZ D High Plus Additional Measures

The outputs from this scenario are summarised in Table 7-8 and Figure 19 and show significant improvements when the additional measures are implemented alongside the CAZ D High scenario, reducing the total number of exceedances from 12 to 10 (See Appendix E).

Inside the CAZ boundary, the largest reductions in road NO_x contributions are observed in Digbeth, due to the closure of Moor Street Queensway. Here, reductions of up to 10% in road NO_x contributions are observed, compared to typical values of around 2% at other locations within the CAZ.

As in the CAZ C High Plus Additional Measures scenario, the maximum modelled concentration of $42.7 \mu\text{g}/\text{m}^3$ at Suffolk St Queensway (PCM_0, Census ID 81490) remains unaltered. Here, it is considered that the local road network in the vicinity of this PCM link is complex, so direct comparison with the PCM network remains difficult. Other locations on the A38 demonstrate reductions from 0.1 to $0.3 \mu\text{g}/\text{m}^3$ in NO_2 , and additional exceedances are observed along the A38.

Beyond the A38, the other location demonstrating an exceedance inside the CAZ is at Digbeth. Here, LAQM (non-PCM) exposure is at the first floor level, so the modelled outputs at ground level are likely to be an overestimate, and the exposure isn't likely to be realistic. At this receptor, significant reductions of up to 1.5 $\mu\text{g}/\text{m}^3$ NO_2 are predicted (ObjectID_15_@4m).

NO_2 concentrations along the Ring Road at A4540 Lawley Middleway - Garrison Circus (PCM_6, Census ID 17998) increase from 41.4 $\mu\text{g}/\text{m}^3$ to 41.5 $\mu\text{g}/\text{m}^3$ (an increase of ~1% on CAZ D High with no additional measures). Further north, on the A4540 at Dartmouth Middleway (PCM_4, Census id 7676), NO_2 concentrations are reduced by ~1% from 40.8 $\mu\text{g}/\text{m}^3$ to 40.3 $\mu\text{g}/\text{m}^3$.

The respective source apportionments are summarised in Figure 20, which indicate significant contributions from a number of vehicle classes as in Table 7-8 summarised below:

Table 7-8 : Summary of 2020 CAZ D High Charge Plus Additional Measures Source Apportionment Results

Site Location	% Contributions From Respective Vehicle Classes					
	Diesel Cars	Petrol Cars	Diesel LGVs	Rigid HGVs	Artic HGVs	Buses & Coaches
A4400 Suffolk St. Queensway	55	11	29	4	1	0
A38 Corporation St	58	11	27	3	1	0
A4540 Lawley Middleway- Garrison Circus	43	5	23	23	6	0
A4100 Moat Lane, Digbeth	42	6	14	5	1	32

In order to deliver full compliance following implementation of a CAZ D high charge with additional measures scenario, additional reductions in NO_x of between 3 and 19% are required (outside and inside the CAZ respectively, see Table 7-6 and Figure 20). Receptor Non_PCM_10 (A4100 at Digbeth) is fully compliant under this scenario, so no further reductions in NO_x are required.

Beyond CAZ D, the limited effect of the additional measures (such as taxi and bus improvements and reduced parking) may be caused by the closure of Moor St Queensway, resulting in rerouting traffic onto the A38 and Middleway.

Overall, this represents the most effective scenario evaluated to date, however, further work would still be required to achieve compliance with the EU Limit values in all areas.

8. Conclusions

This report contains a description of the factors driving implementation of the CAZ, the existing measures being undertaken by BCC to improve air quality, and an evaluation of the potential air quality benefits which could be delivered by the implementation of a potential charging CAZ with appropriate supporting additional measures.

The results of the traffic and air quality modelling undertaken to date have demonstrated that implementation of a charging 'class C' or 'class D' Clean Air Zone (CAZ), in the absence of supporting additional measures, would be insufficient to deliver full compliance with EU Limit Values for annual mean NO₂.

Under a class C CAZ (with High Charge) based on the boundary of the Inner Ring Road, exceedances of the EU Limit for NO₂ are still predicted to occur on the A38 and Ring Road in 2020. It is estimated that additional reductions of up to 11% and 31% of total oxides of nitrogen (NO_x) would be required, outside and inside the CAZ, respectively, to achieve compliance with the Limit Value. Even if all the vehicles restricted by 'category C' which entered the zone had a compliant engine, the levels of NO₂ would still be too great. This reflects the fact that over 80% of the vehicles entering the CAZ area are private cars (or private hire vehicles) and these are not restricted by a CAZ C scheme.

Under a class D CAZ (where non-compliant cars are subject to charging), concentrations of NO₂ reduce by an additional 1.5 µg/m³ inside the CAZ (with a medium charge), and by 1.8 µg/m³ for a high charge, beyond the CAZ C high scenario. There are still places, however, where the legal limits are predicted to be exceeded on the A38 and Ring Road. It is estimated that additional reductions of up to 9% and 19% NO_x are required, outside and inside the CAZ respectively, to remove these exceedances.

A number of additional measures which could be applied to support the various CAZ options have been evaluated, including upgrade to buses and taxis, removal of free parking, changes to the road network and upgrades to bus corridors.

With a CAZ C High Charge Plus Additional measures scheme in place, dispersion modelling shows that by 2020, the total number of exceedances is predicted to reduce from 19 (in the CAZ C High Scenario) to 17 (in the CAZ C High Plus Additional Measures scenario). In order to deliver full compliance, additional reductions in NO_x of between 14 and 31% will still be required.

The CAZ D High Charge Plus Additional Measures scheme is predicted to deliver greater improvements by 2020, reducing the total number of exceedances from 12 (in the CAZ D High Scenario) to 10 (in the CAZ D High Plus Additional Measures scenario). In order to deliver full compliance, additional reductions in NO_x of between 3 and 19% would still be required.


Overall, the CAZ D Plus Additional Measures Scheme represents the most effective scenario evaluated to date. However, since modelling the most stringent possible measures still hasn't led to compliance, BCC will be looking at achieving compliance in 2021. This is beyond the year assumed in the national modelling for the 2017 Plan because detailed local modelling presented in this report has shown that the problem is worse (in terms of number of sites over limit value and the fact that a number of sites over the limit value are outside of the city centre).



FIGURE 1

Legend

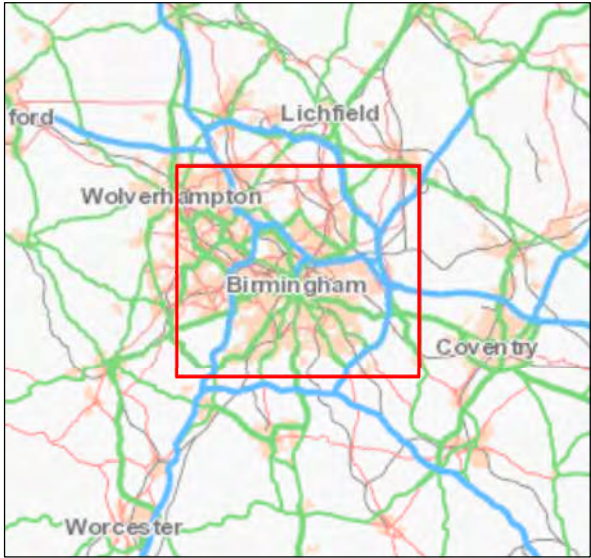Birmingham Air Quality Management Area



0	04/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div><div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div></div>						
Client						
<div><div><div><div></div></div><div>Birmingham City Council</div></div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
BIRMINGHAM AIR QUALITY MANAGEMENT AREA						
Scale @ A3		1:100,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

FIGURE 3

Legend

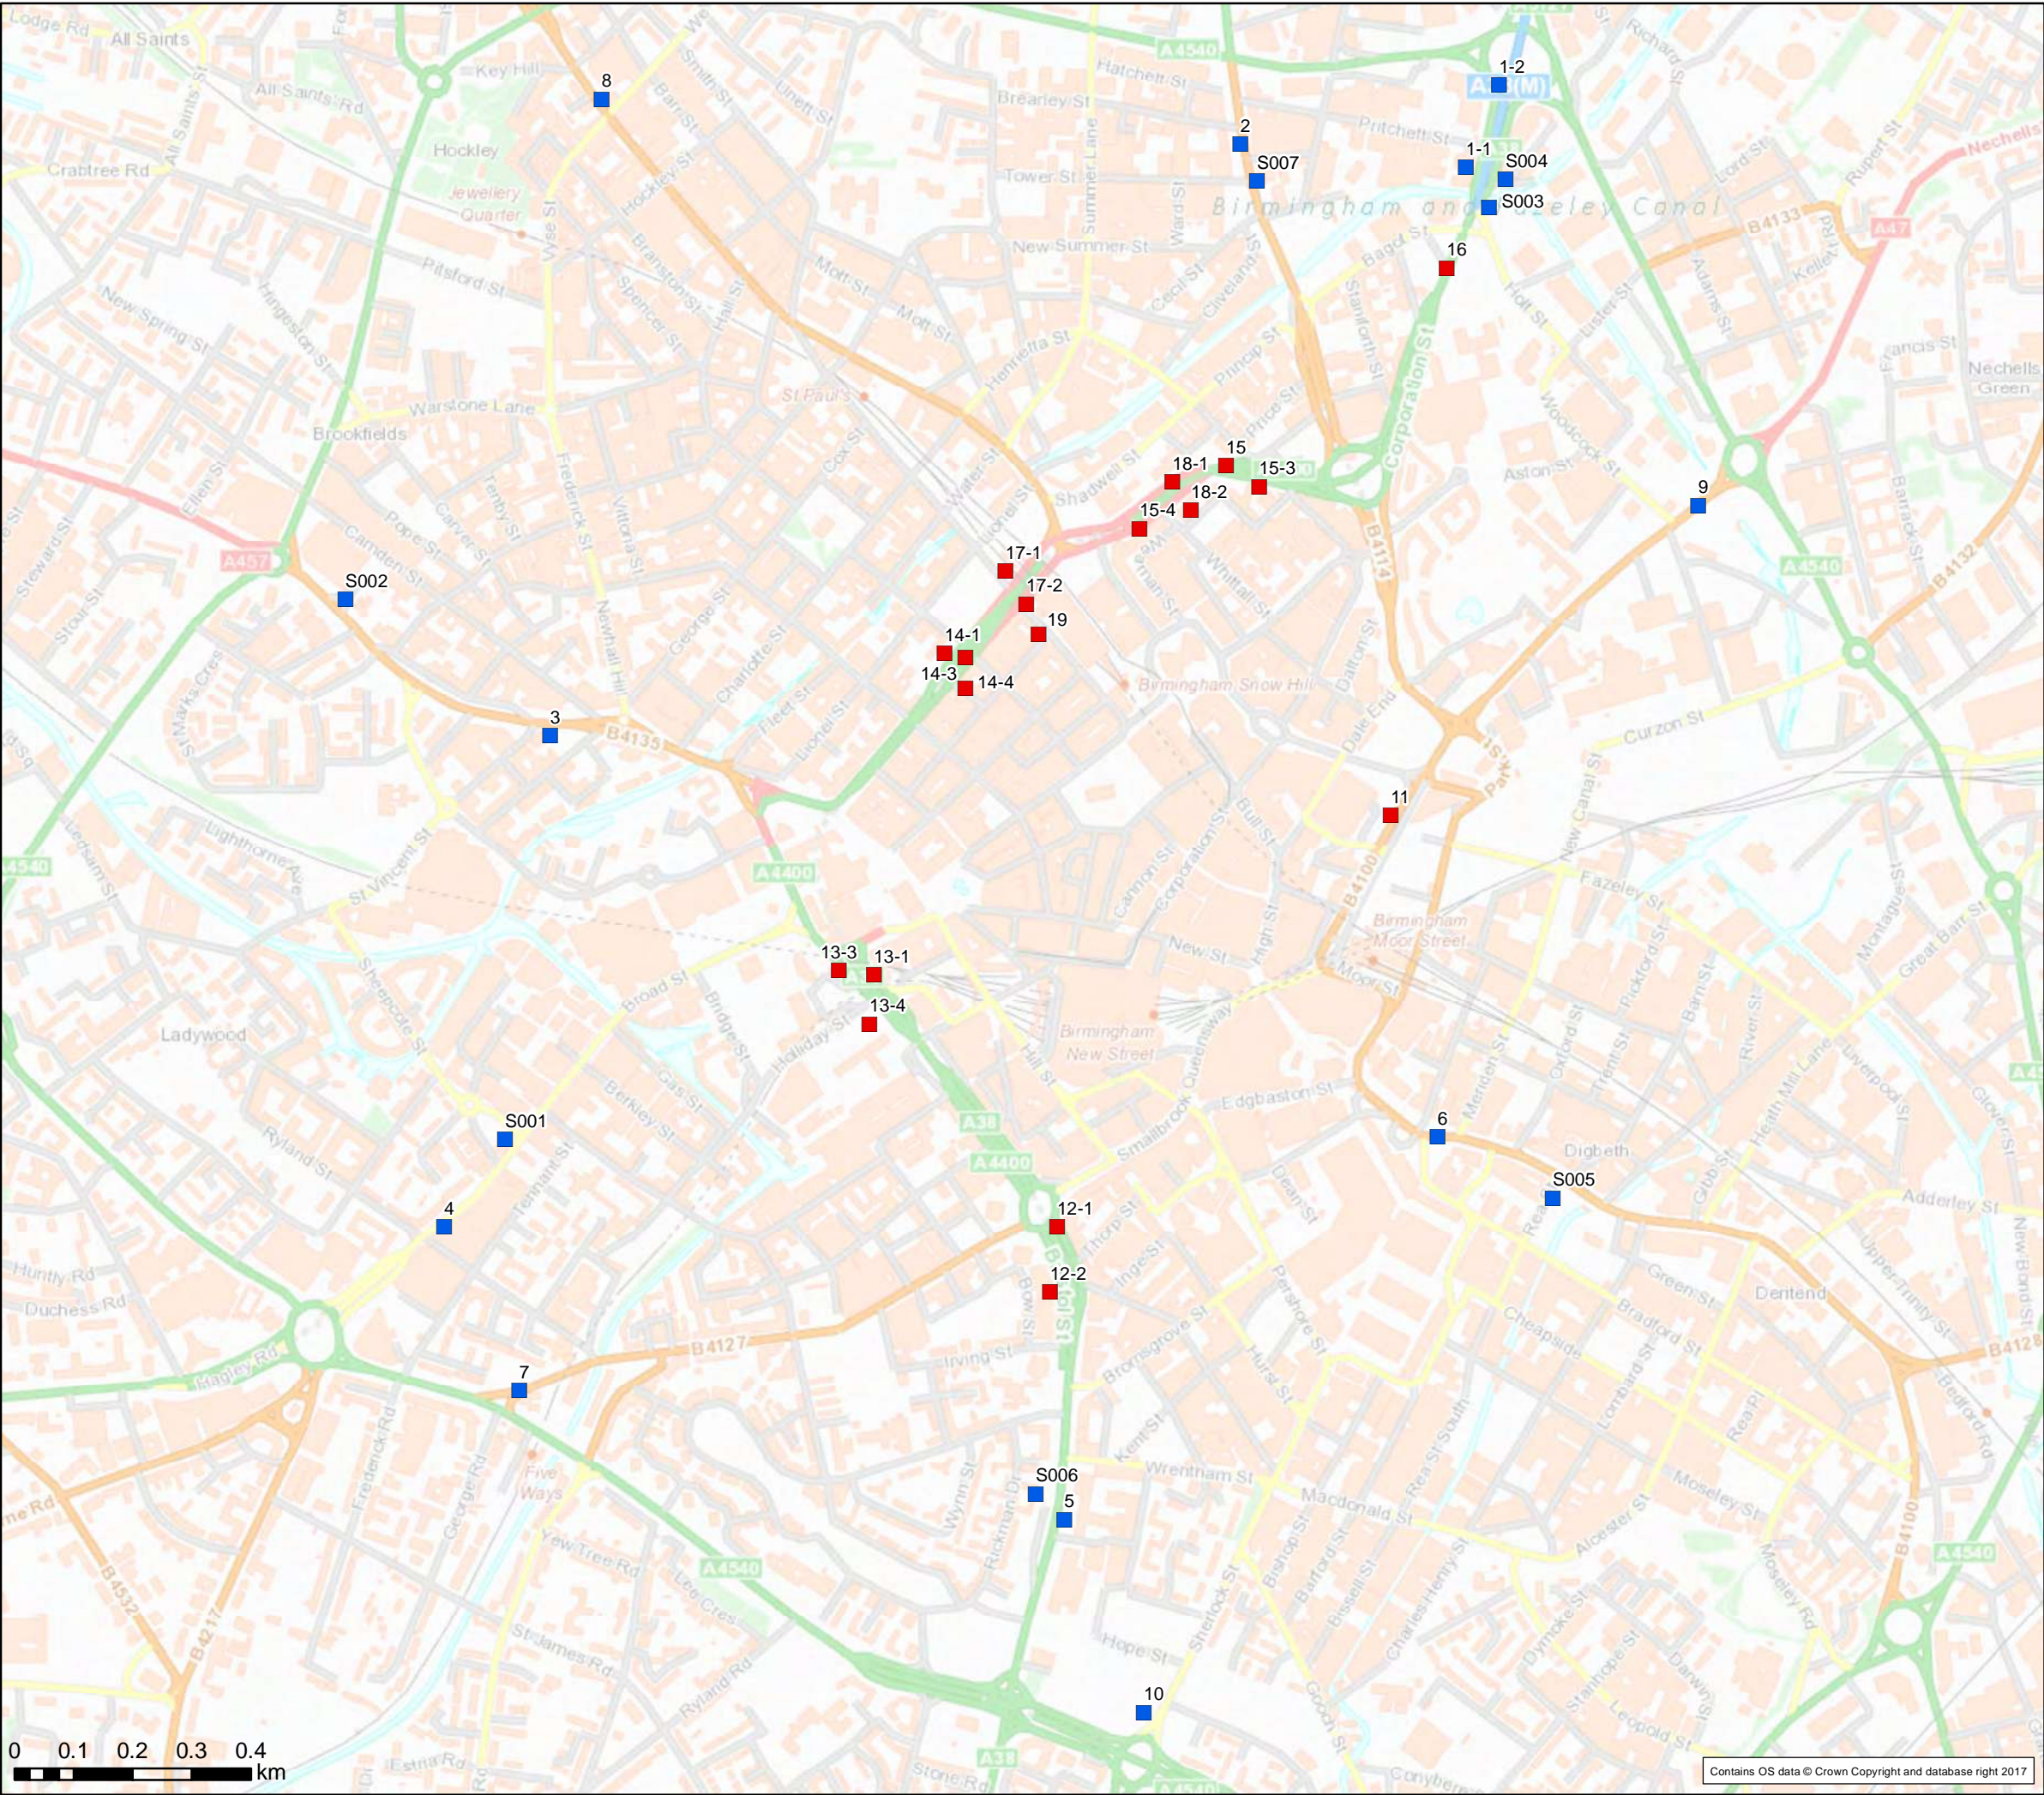
Automatic Number Plate Recognition survey location

■

 External site

■

 Internal site



0	23/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div><div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div></div>						
Client						
<div><div><div><div></div></div><div>Birmingham City Council</div></div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
BCC ANPR CAMERA LOCATIONS						
Scale @ A3		1:10,967			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

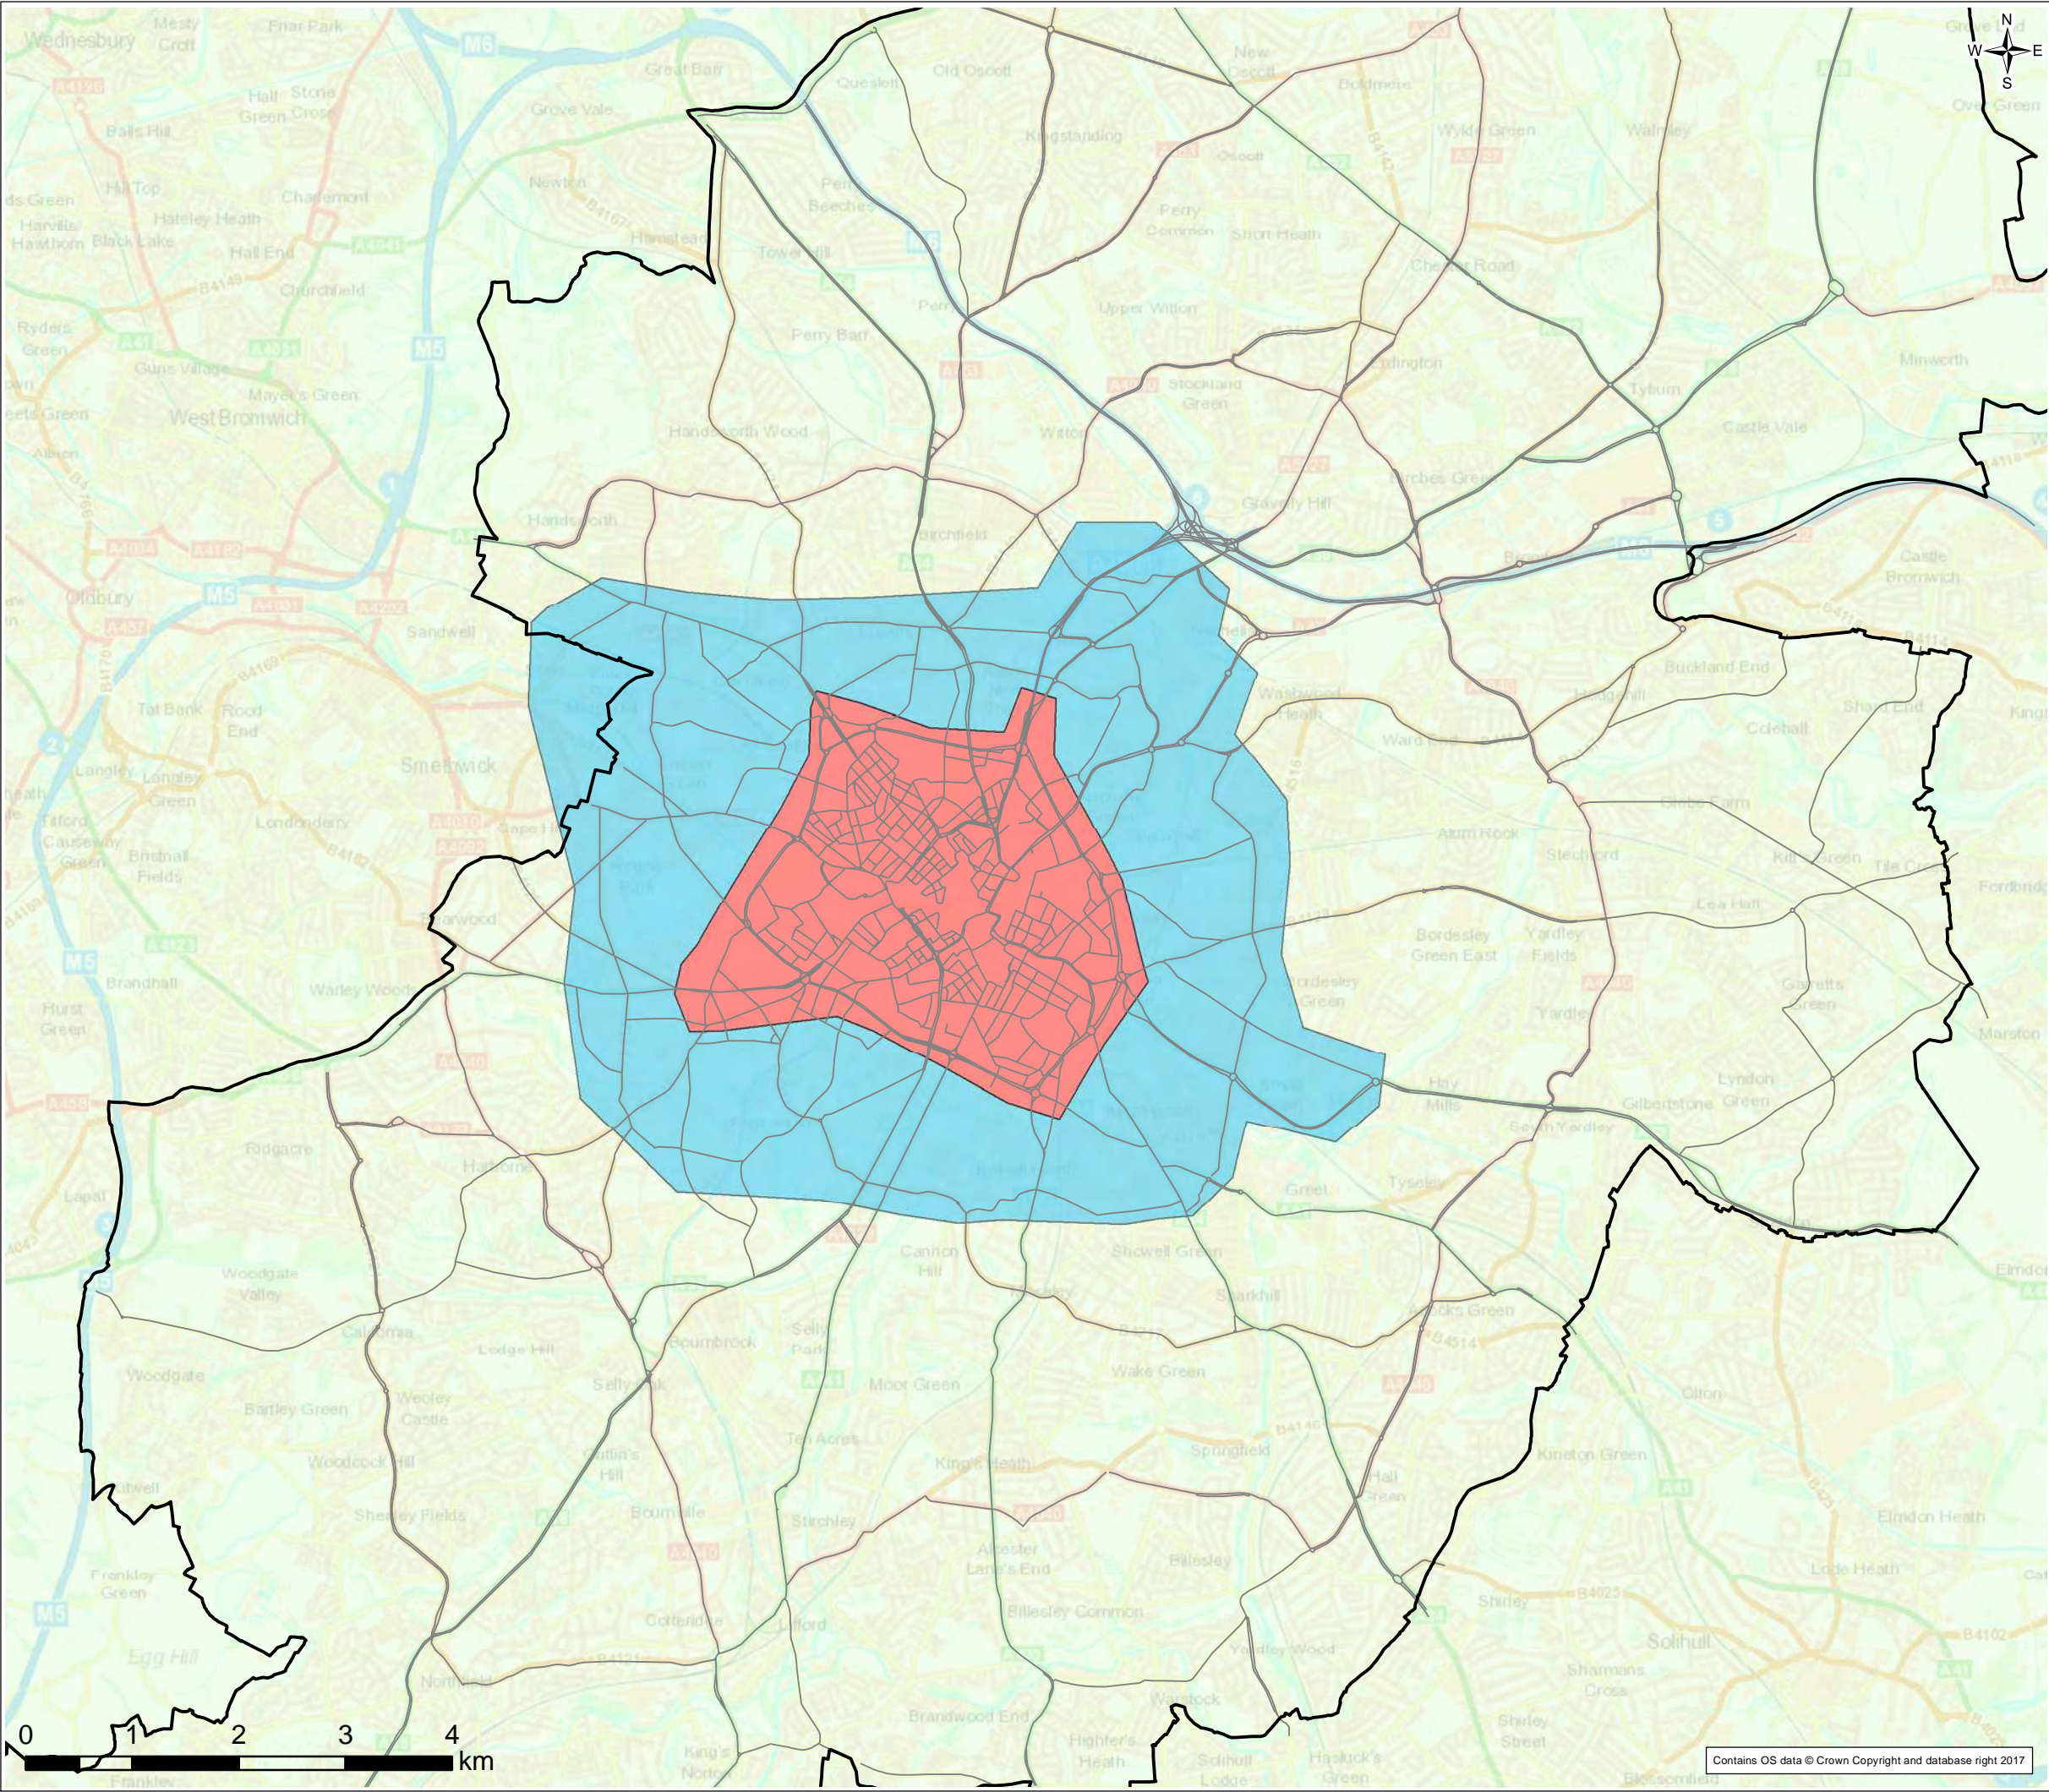



FIGURE 4


- Legend
- Birmingham borough
 - Modelled road network
 - Speed Flow Zone
 - Detailed Zone
 - Buffer Zone



0	04/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd
<div><div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div></div>						
Client						
<div><div><div><div></div></div><div>Birmingham City Council</div></div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
SATURN MODEL ZONING						
Scale @ A3		1:60,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

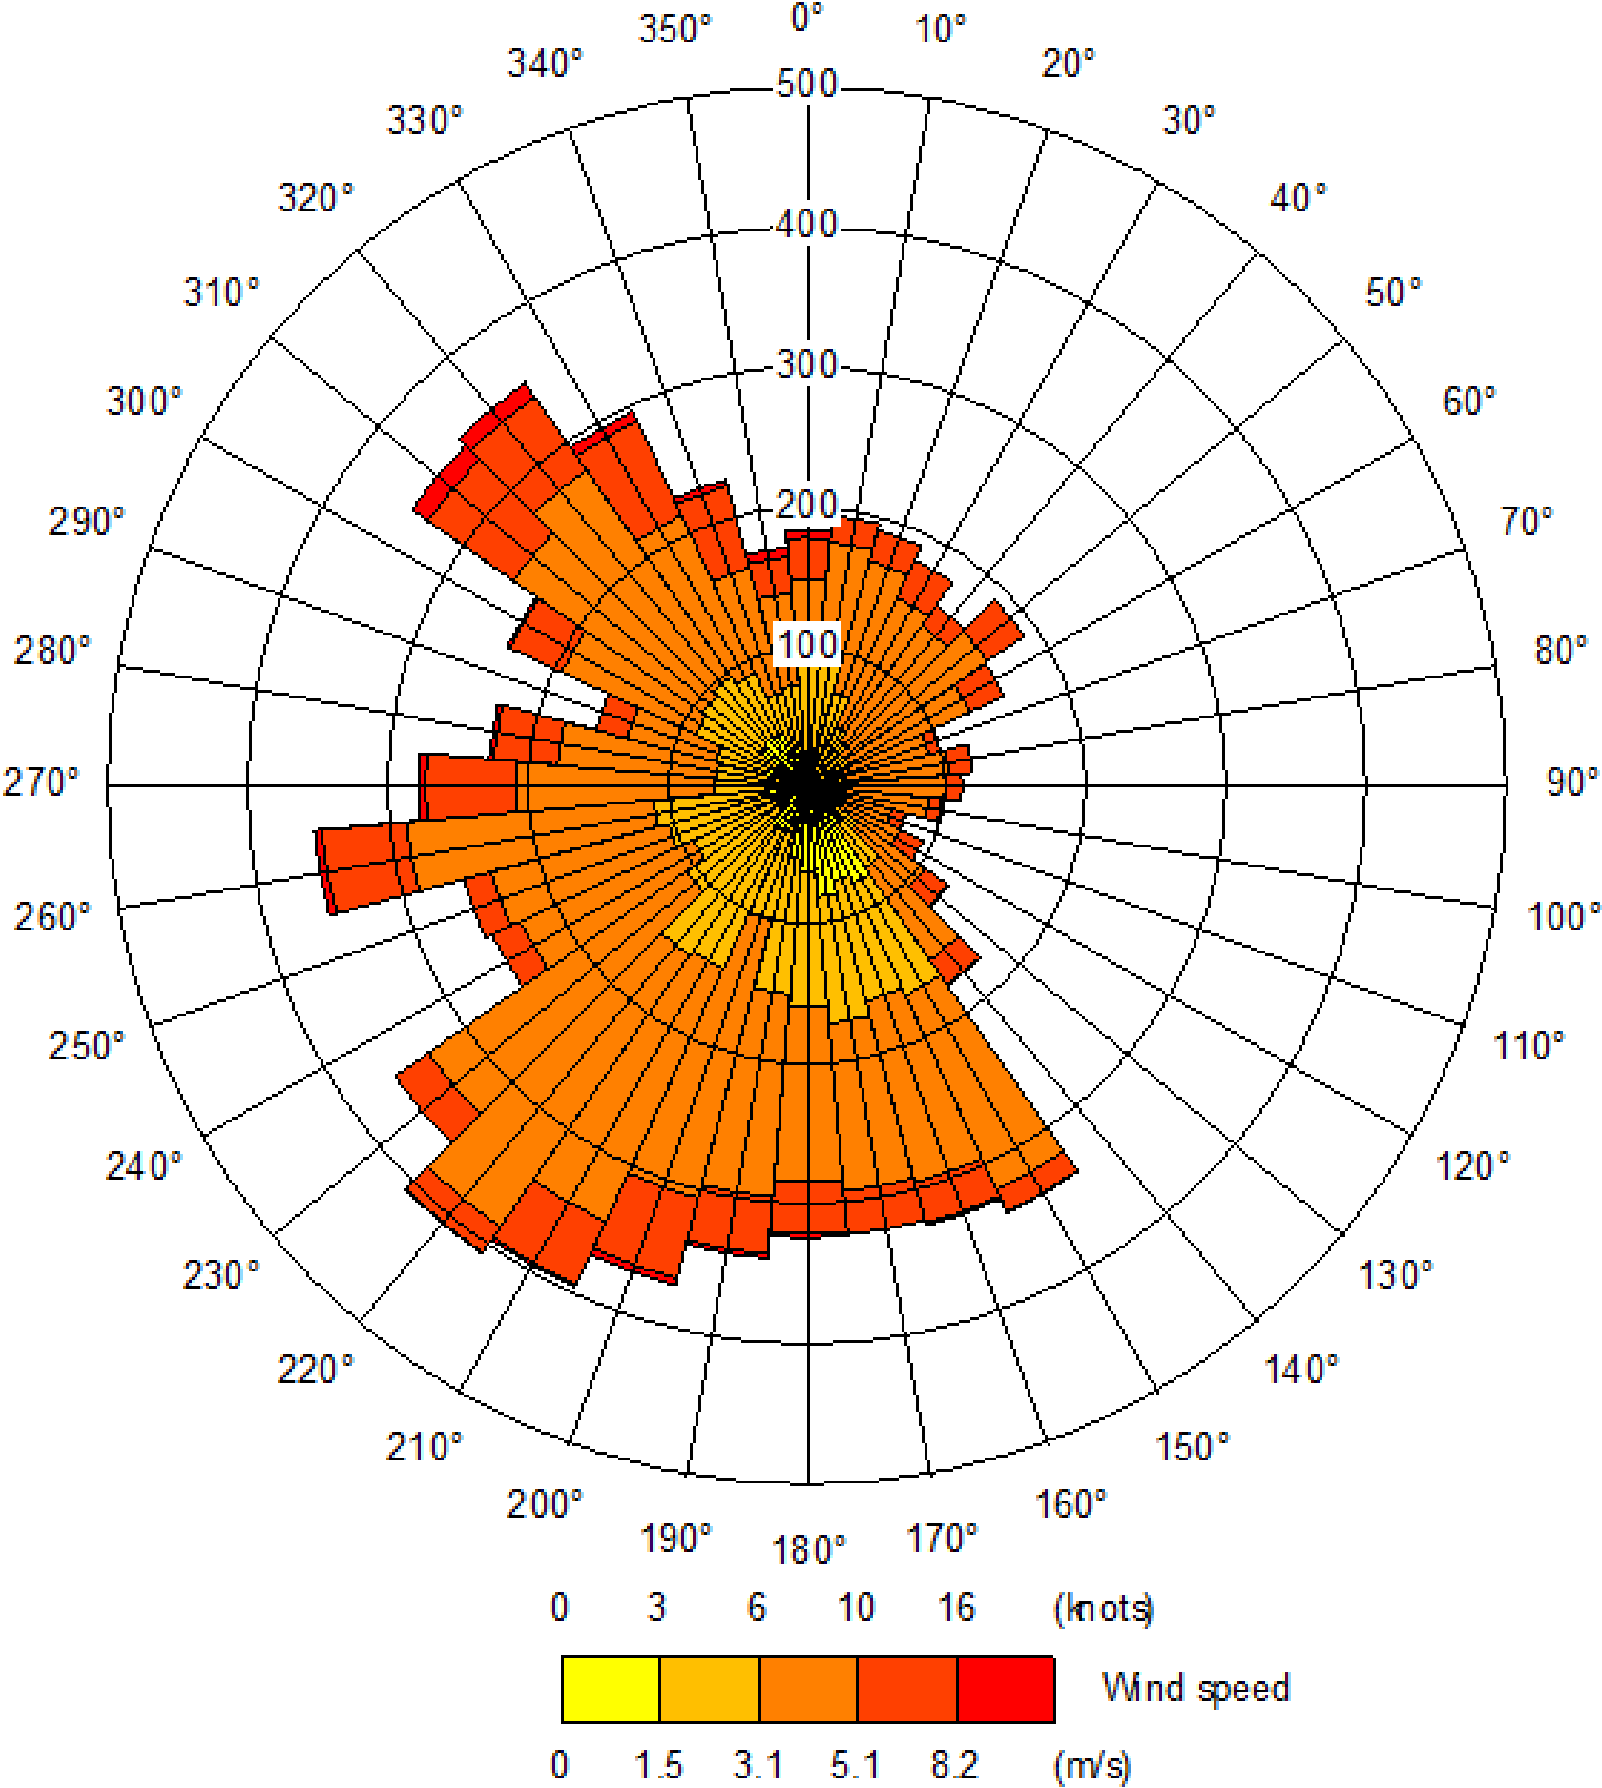FIGURE 5



0	20/04/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN</div><div>Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001</div><div>www.jacobs.com</div></div>						
Client						
<div><div></div><div>Birmingham City Council</div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
WIND ROSE FROM BIRMINGHAM AIRPORT METEOROLOGICAL STATION (2016)						
Scale @ A3			DO NOT SCALE			
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

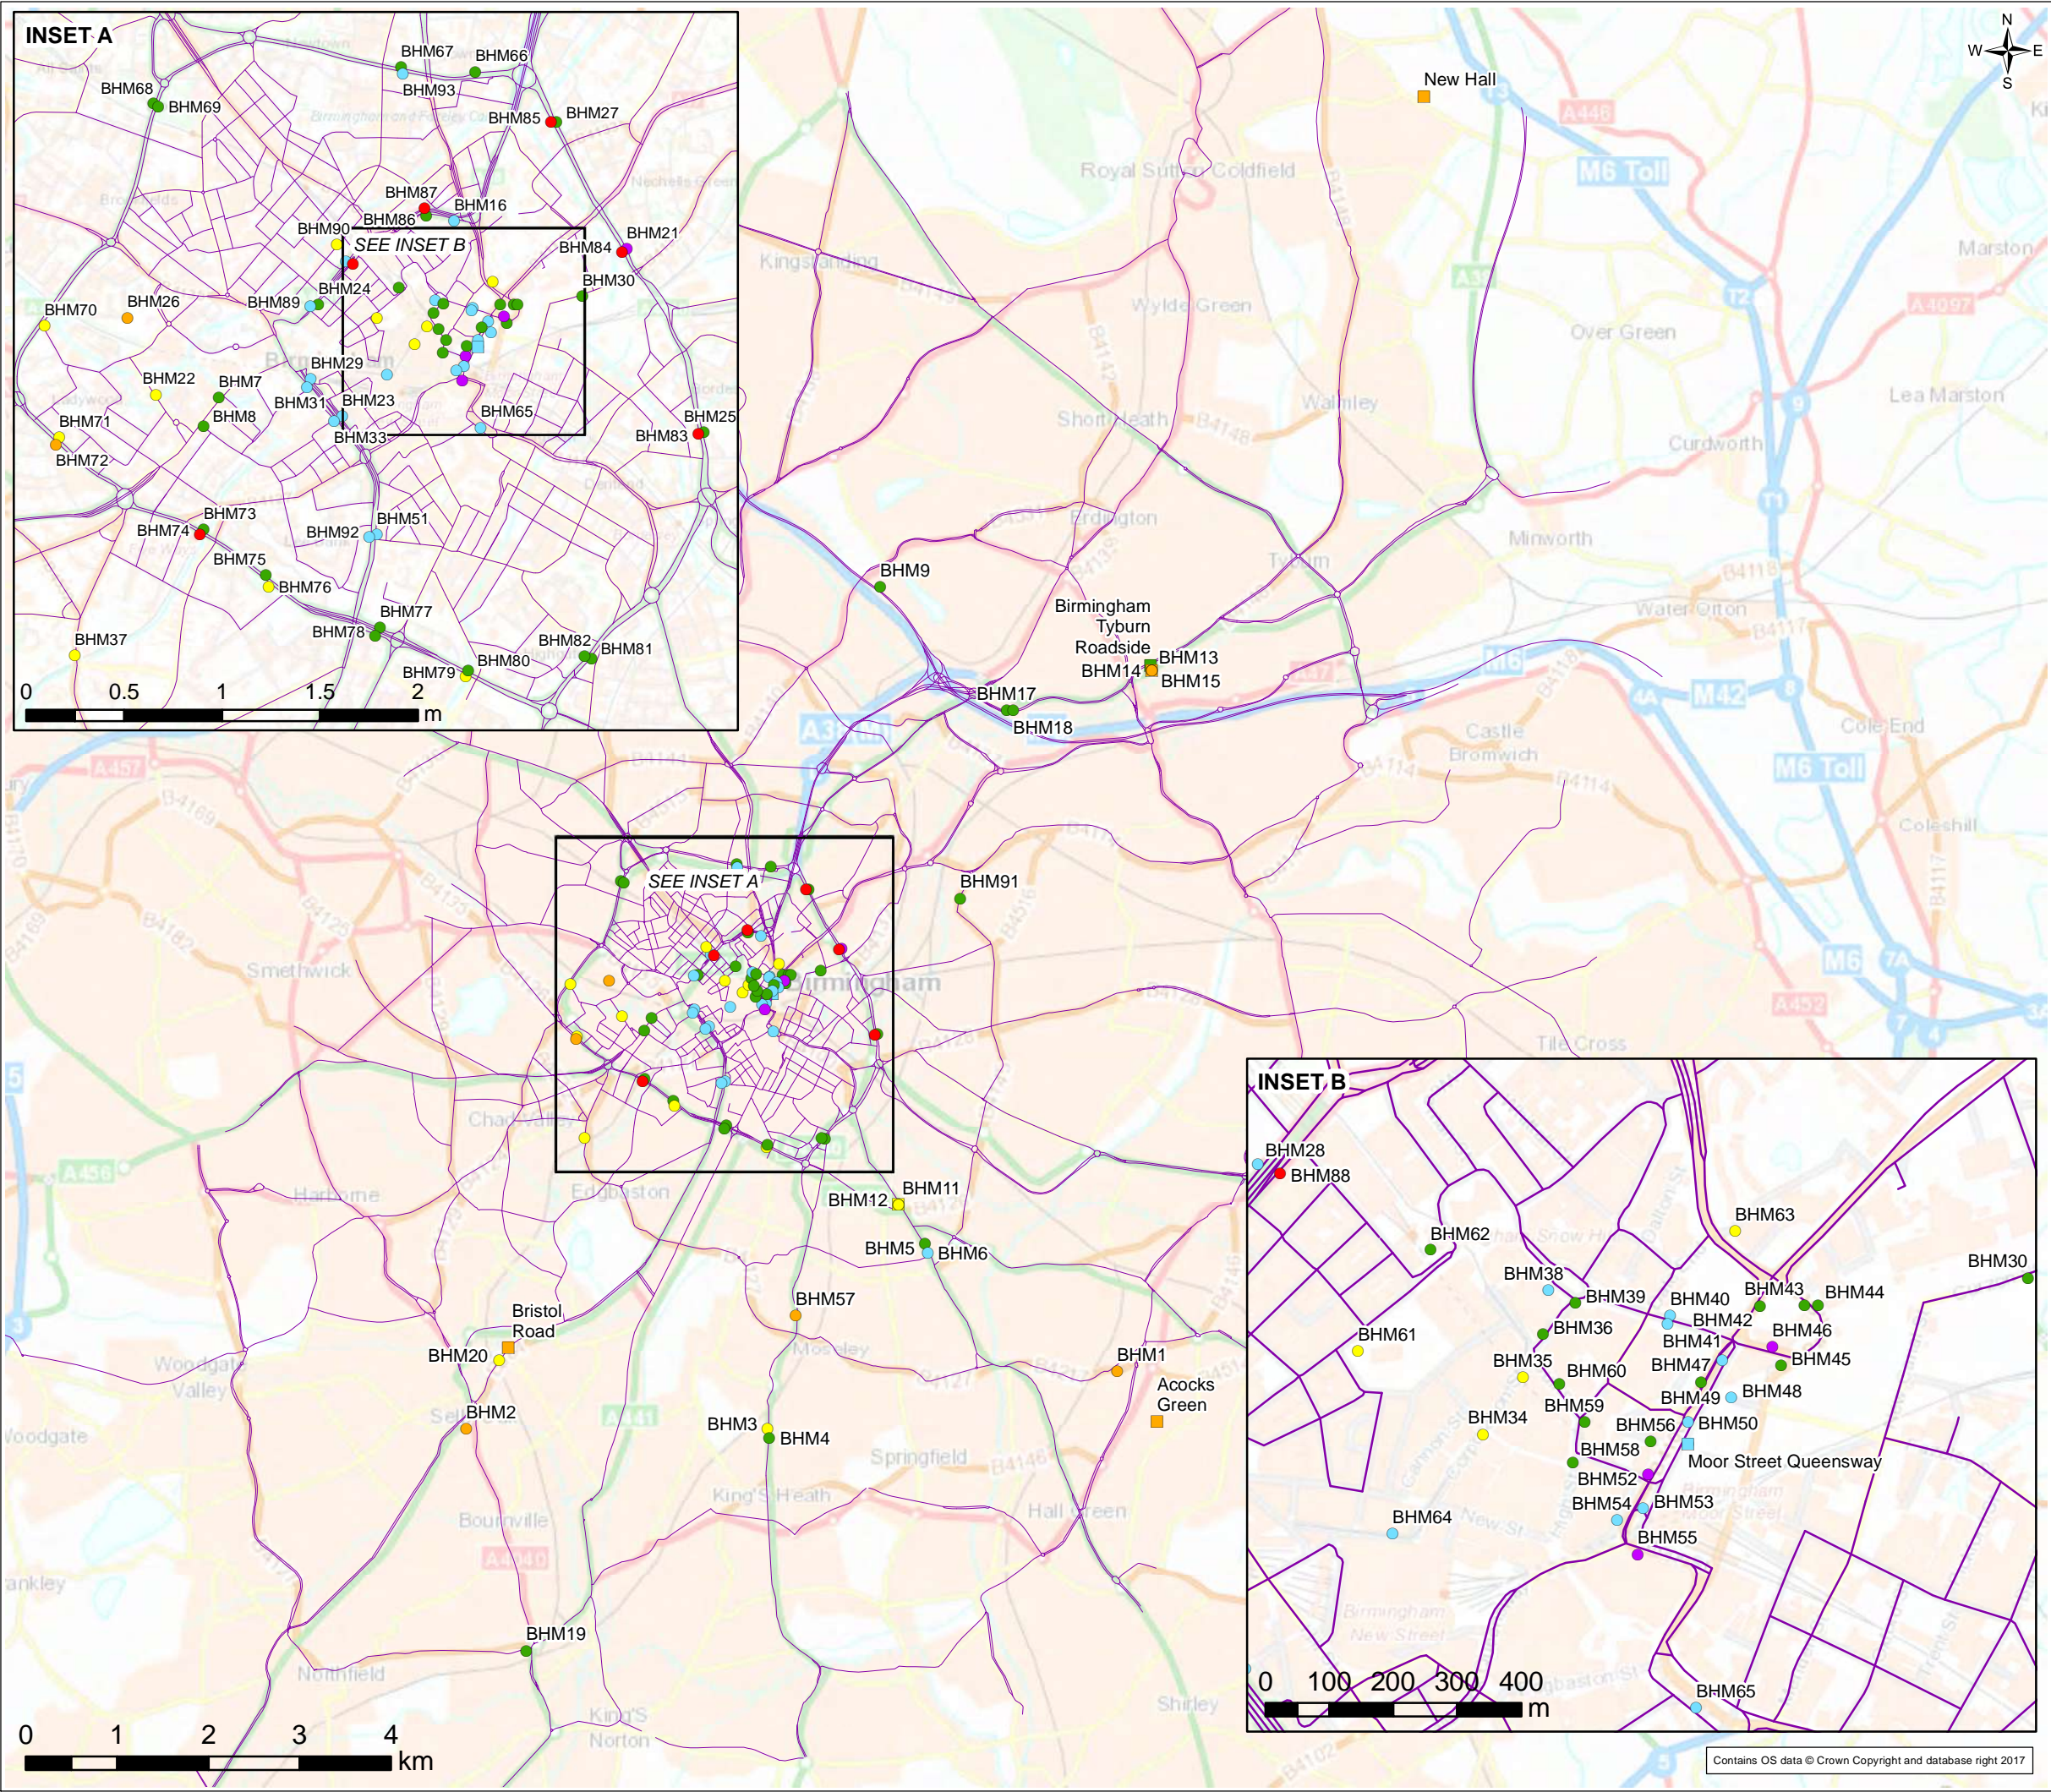


FIGURE 6

Legend

Monitored NO₂ concentrations µg/m³

Diffusion tube

- <30
- 30-40
- 40-50
- 50-60
- 60-70
- >70

Continuous monitoring station

- <30
- 30-40
- 40-50
- 50-60
- 60-70
- >70

Modelled road network

0	20/04/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd

JACOBS

7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN
Tel: +44 (0)121 237 4000 Fax: +44 (0)121 237 4001
www.jacobs.com

Client

Birmingham City Council

Project

BIRMINGHAM CLEAN AIR ZONE

Drawing Title

MONITORED ANNUAL MEAN NO₂ CONCENTRATIONS: 2016 (µg/m³)

Scale @ A3	1:70,000	DO NOT SCALE
Jacobs No.	B2309019	

Contains OS data © Crown Copyright and database right 2017

This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.

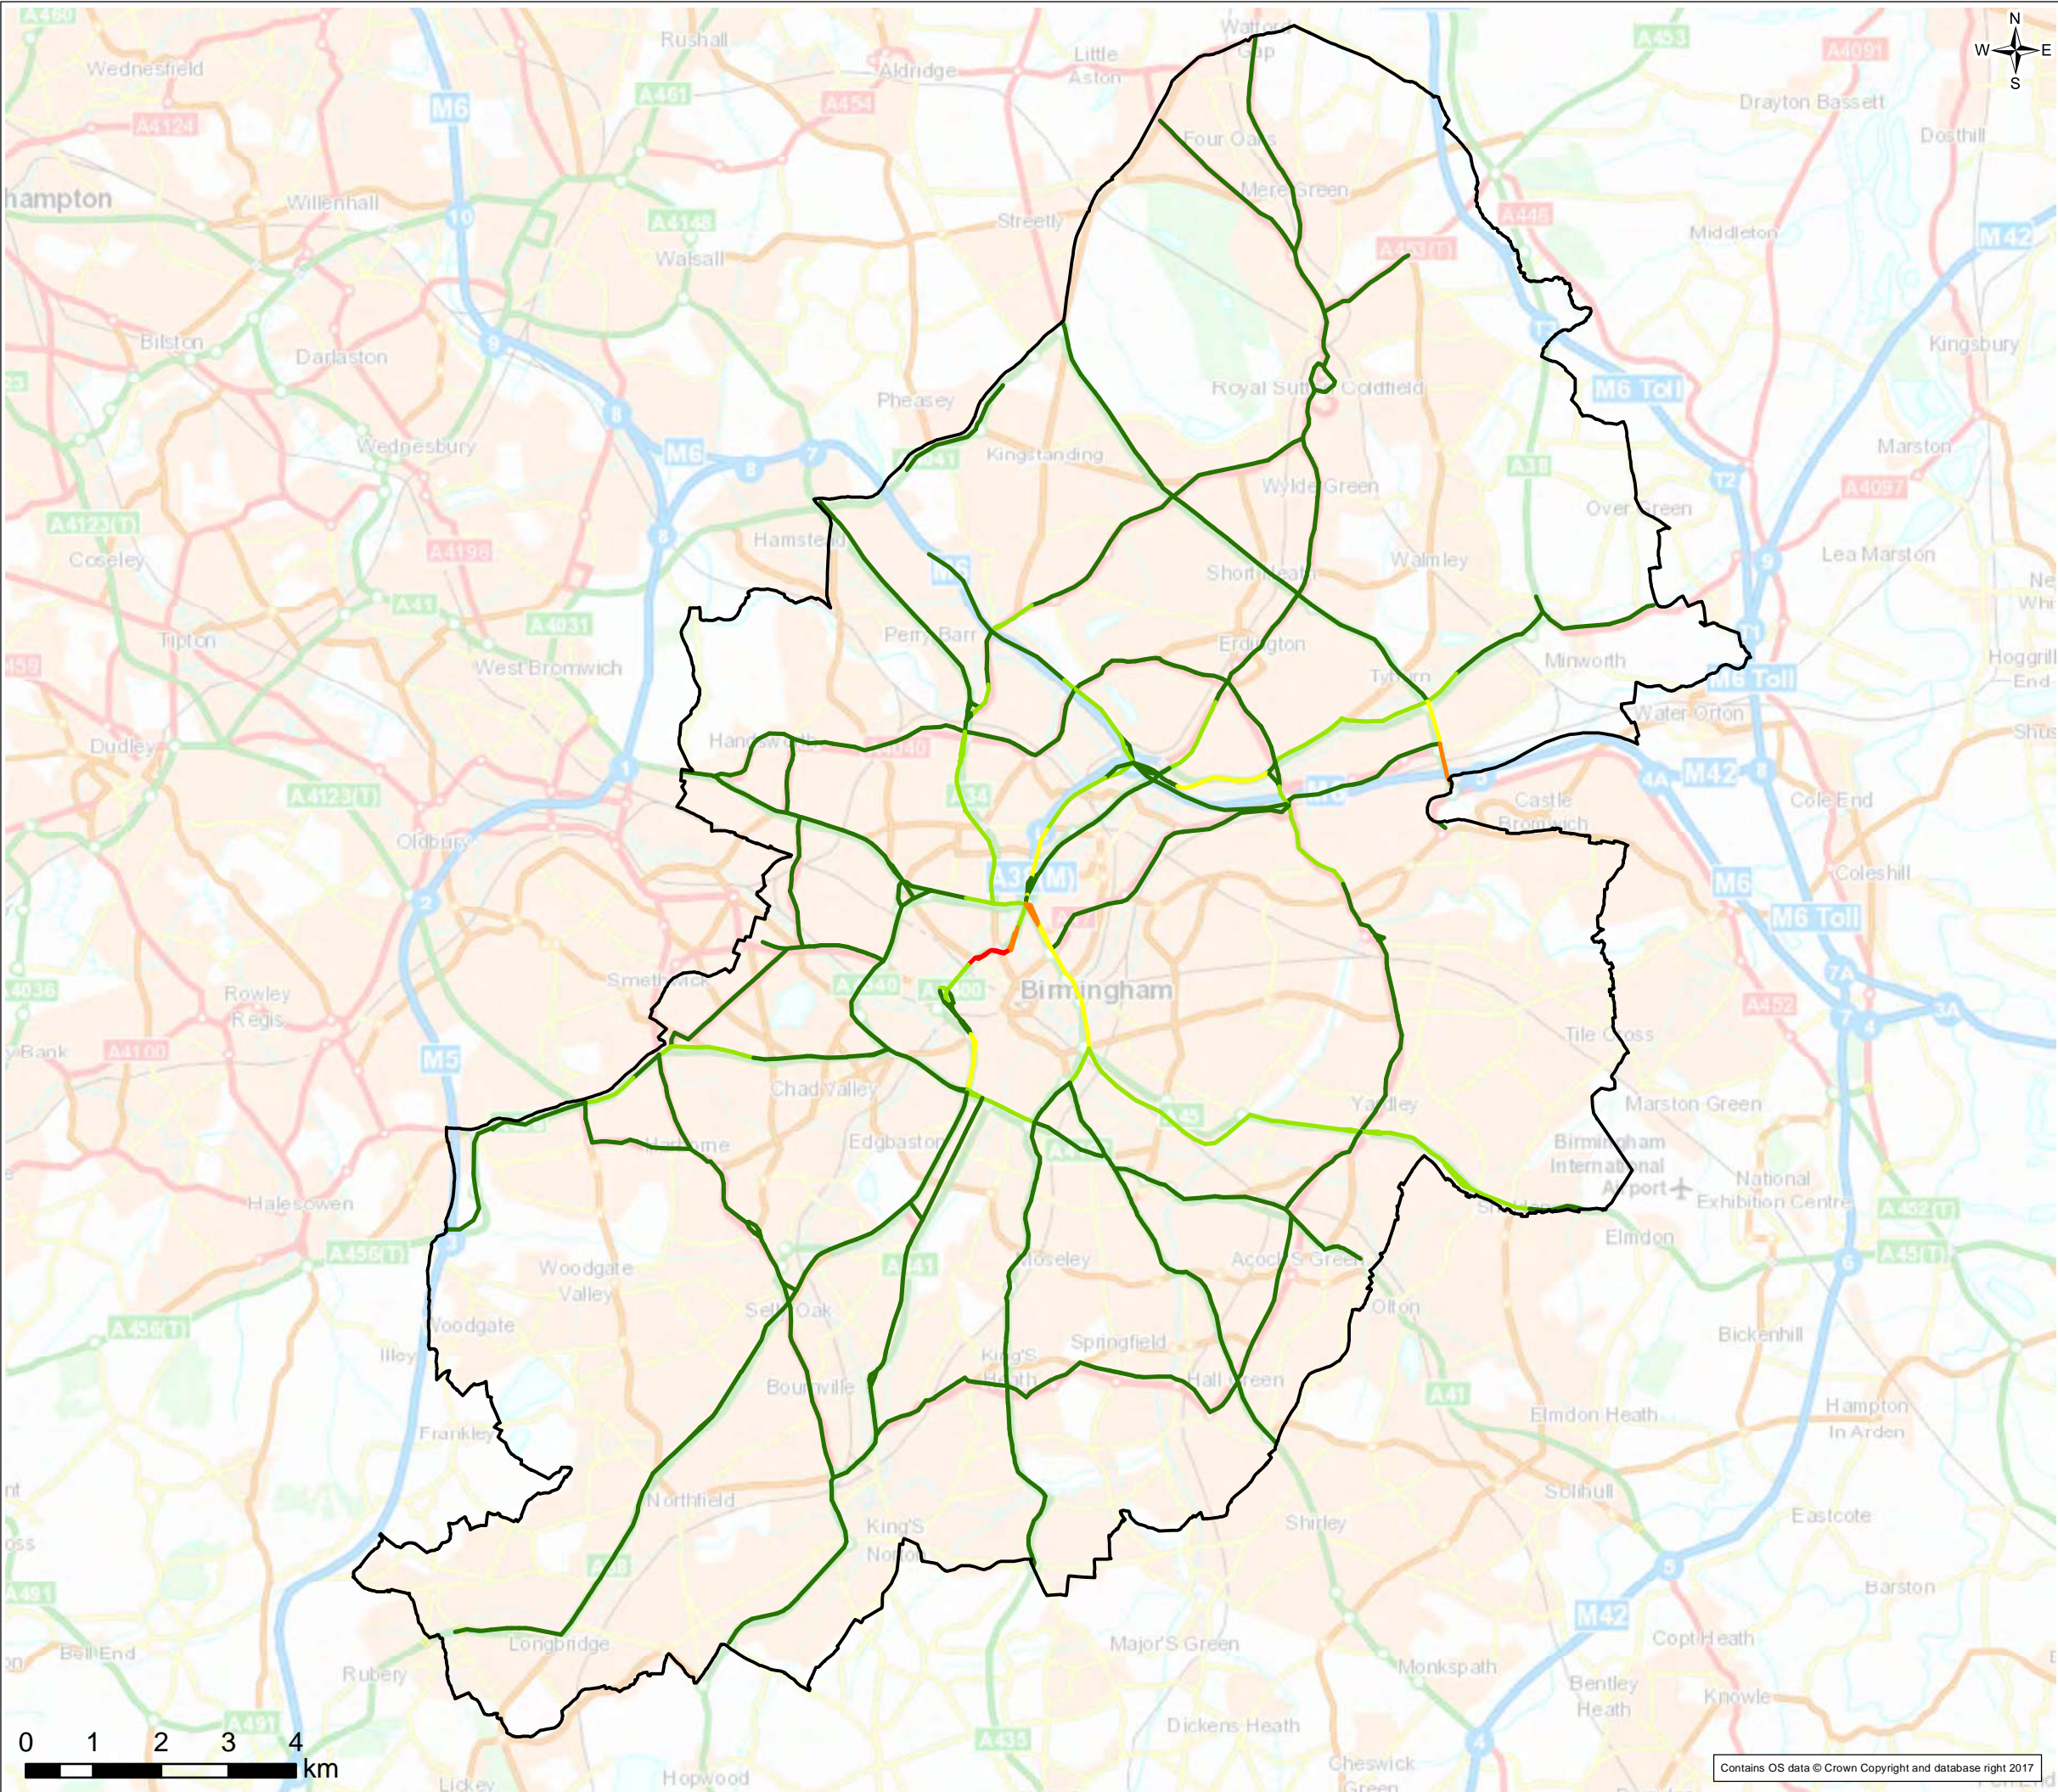



FIGURE 8

Legend

PCM 2020 NO₂, ug/m³.
Data provided by JAQU in July 2017.

- <35
- 35-40
- 40-45
- 45-50
- >50

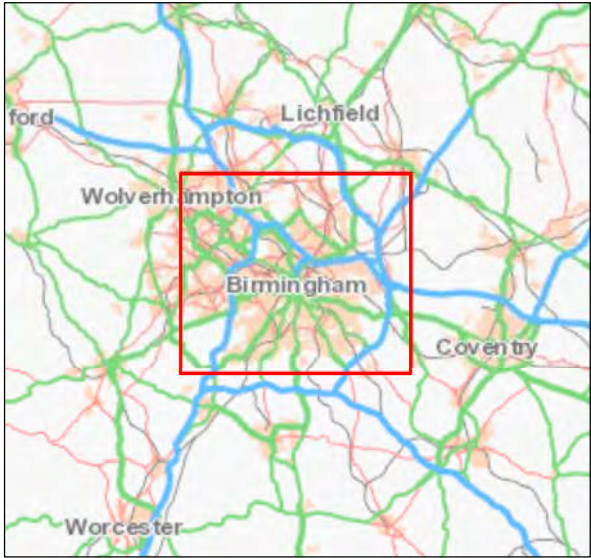□ Birmingham borough



0	25/04/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div><div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div></div>						
Client						
<div><div><div><div></div></div><div>Birmingham City Council</div></div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
POLLUTION CLIMATE MAPPING 2020						
Scale @ A3		1:95,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

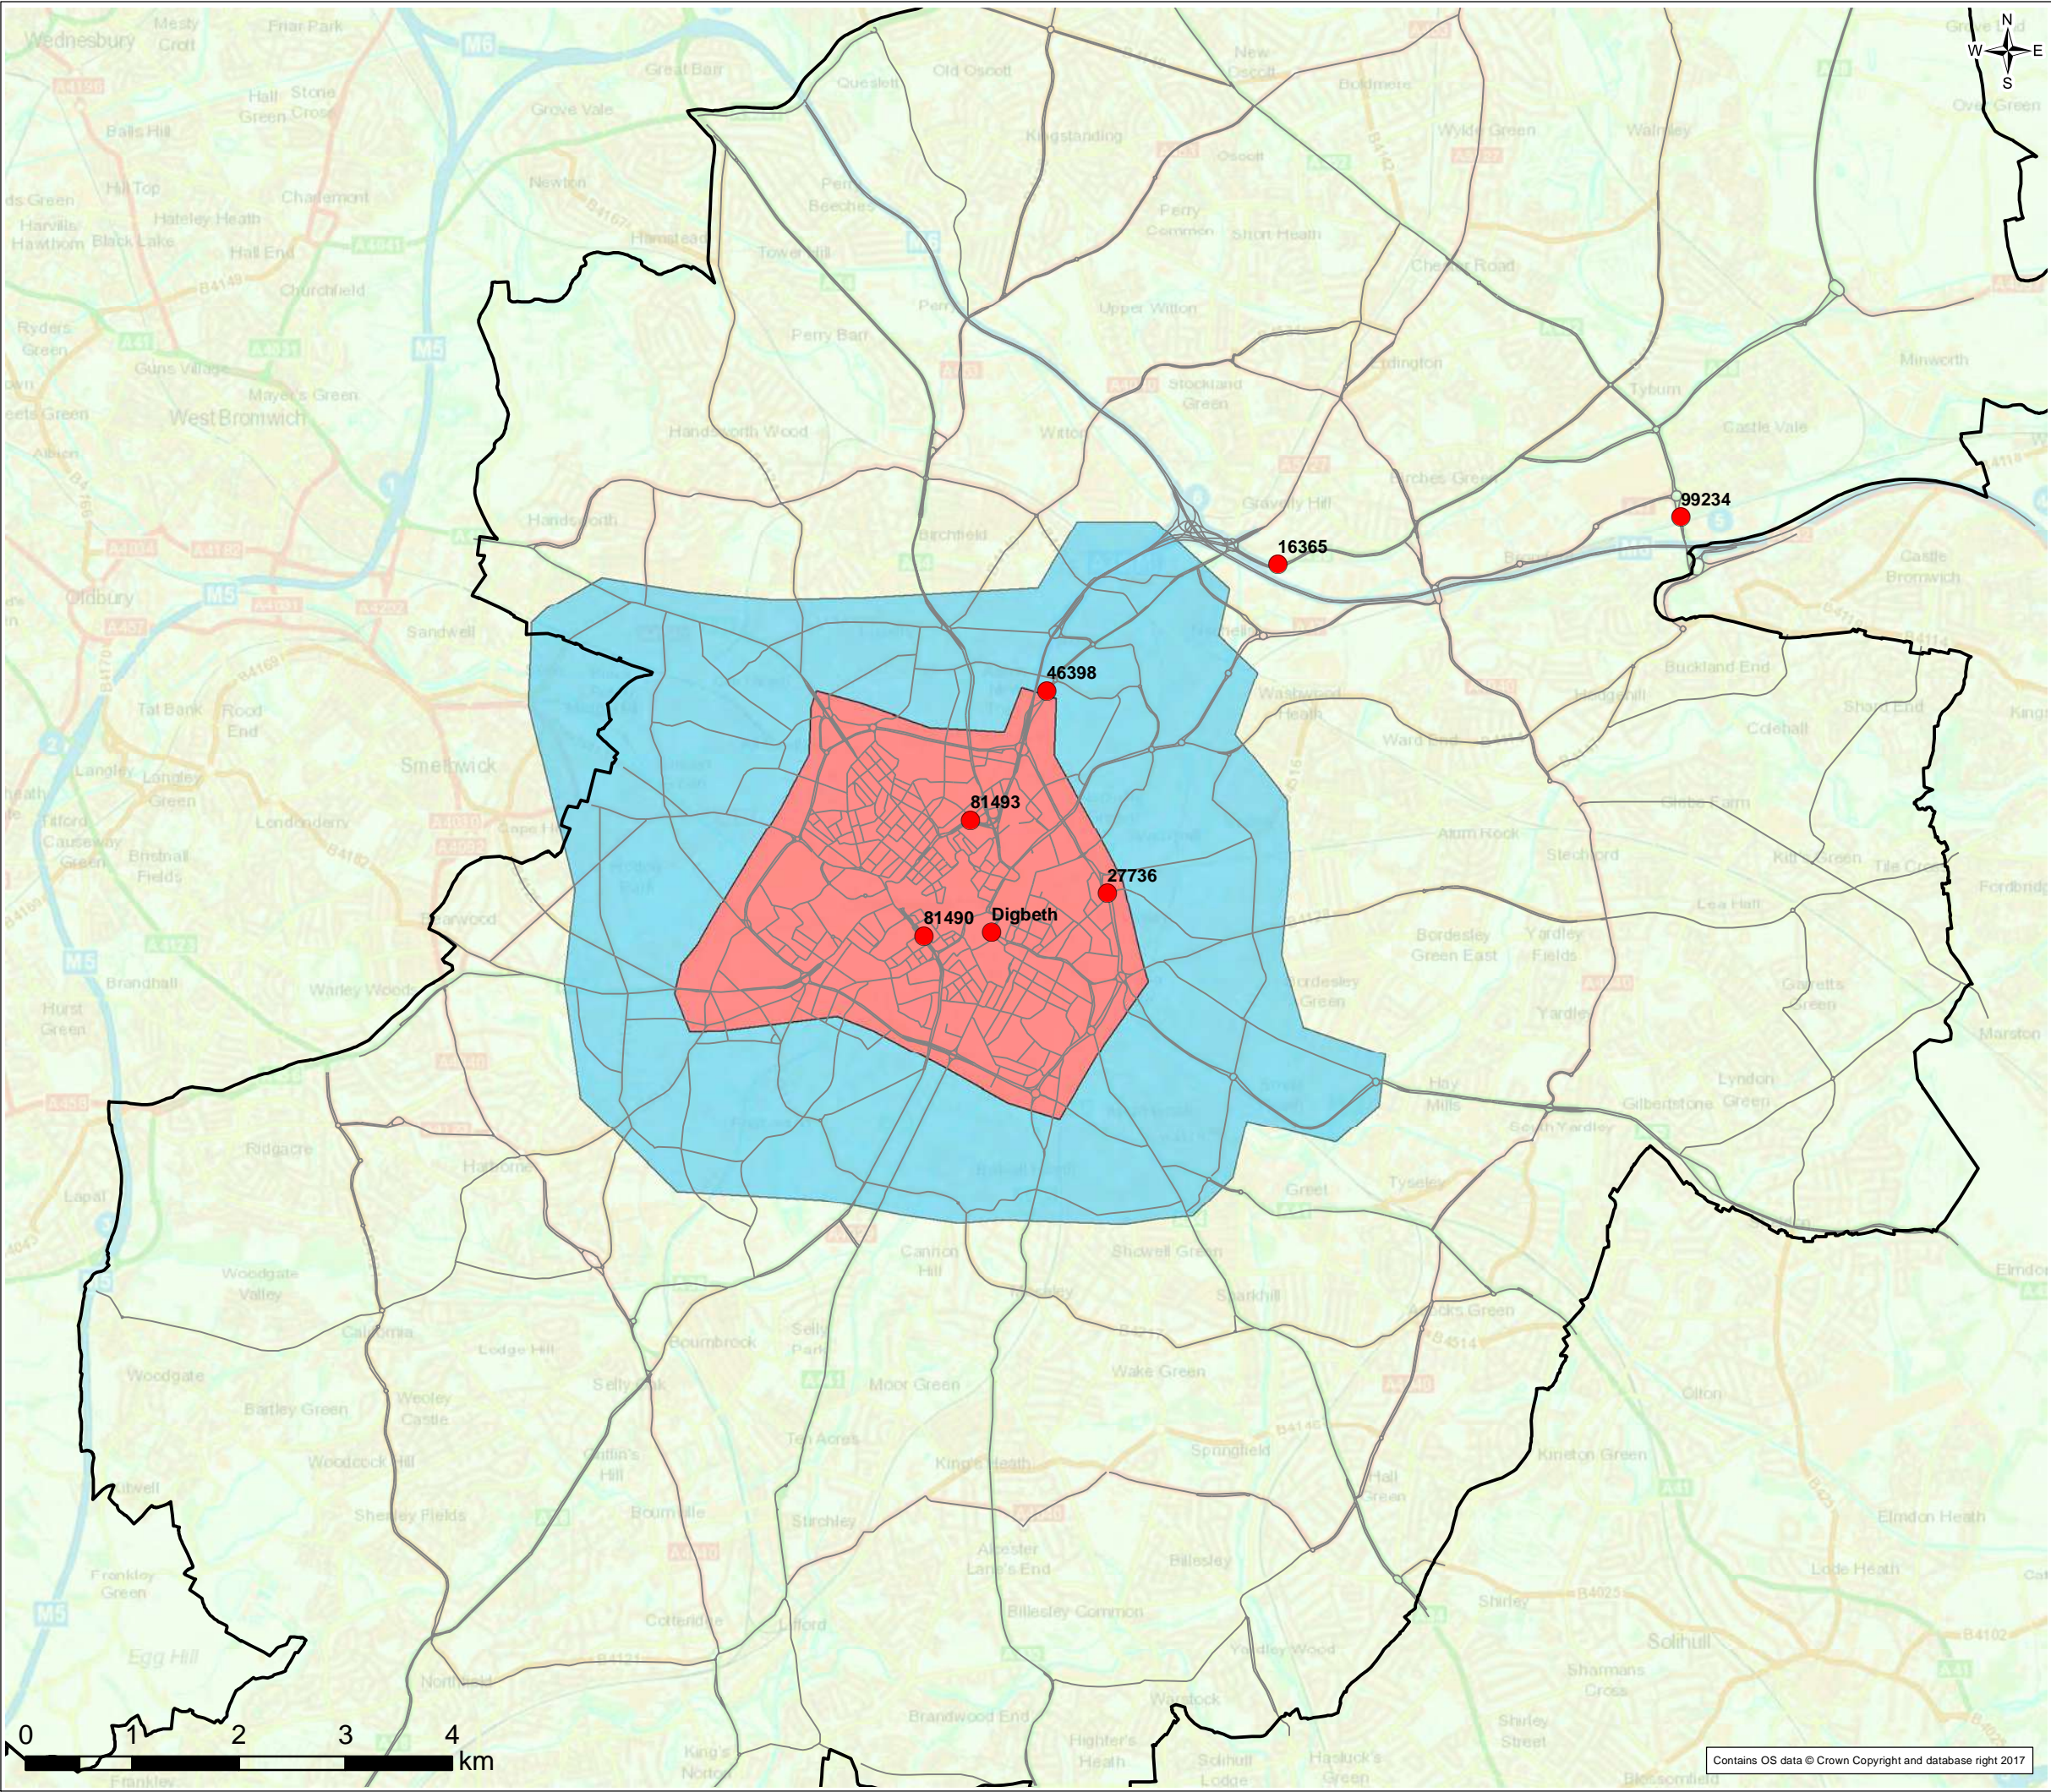




FIGURE 9


- Legend
- PCM Discussion Points
 - ▭ Birmingham borough
 - Modelled road network
 - ▭ Speed Flow Zone
 - ▭ Detailed Zone
 - ▭ Buffer Zone




0	25/04/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div><div><div>JACOBS</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44 (0)121.237.4001 www.jacobs.com</div></div></div>						
Client						
<div><div><div></div></div><div>Birmingham City Council</div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
PCM DISCUSSION POINTS						
Scale @ A3		1:60,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

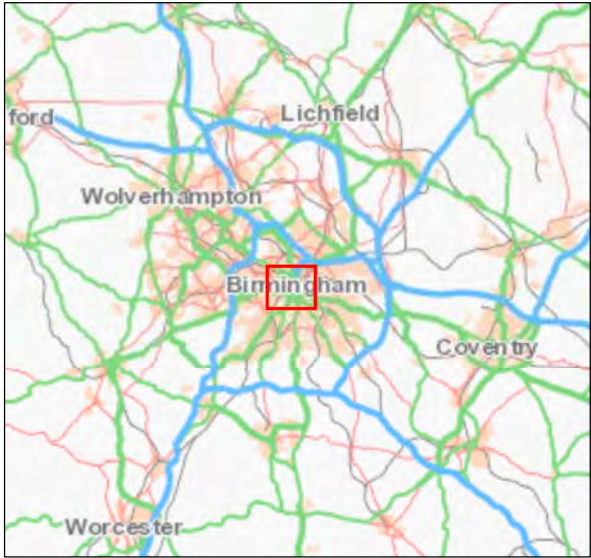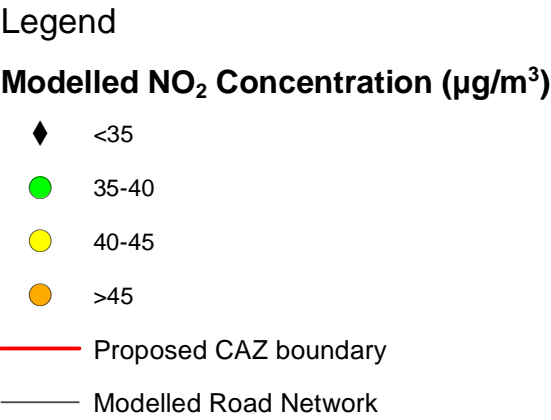FIGURE 10



0	08/06/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div>JACOBS</div> <div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div>						
Client						
<div><div></div><div>Birmingham City Council</div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
LOCATIONS OF KEY NO ₂ EXCEEDANCE AND SOURCE APPORTIONMENT WITH DO-MINIMUM (DM) SCENARIO (2020)						
Scale @ A3		1:20,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

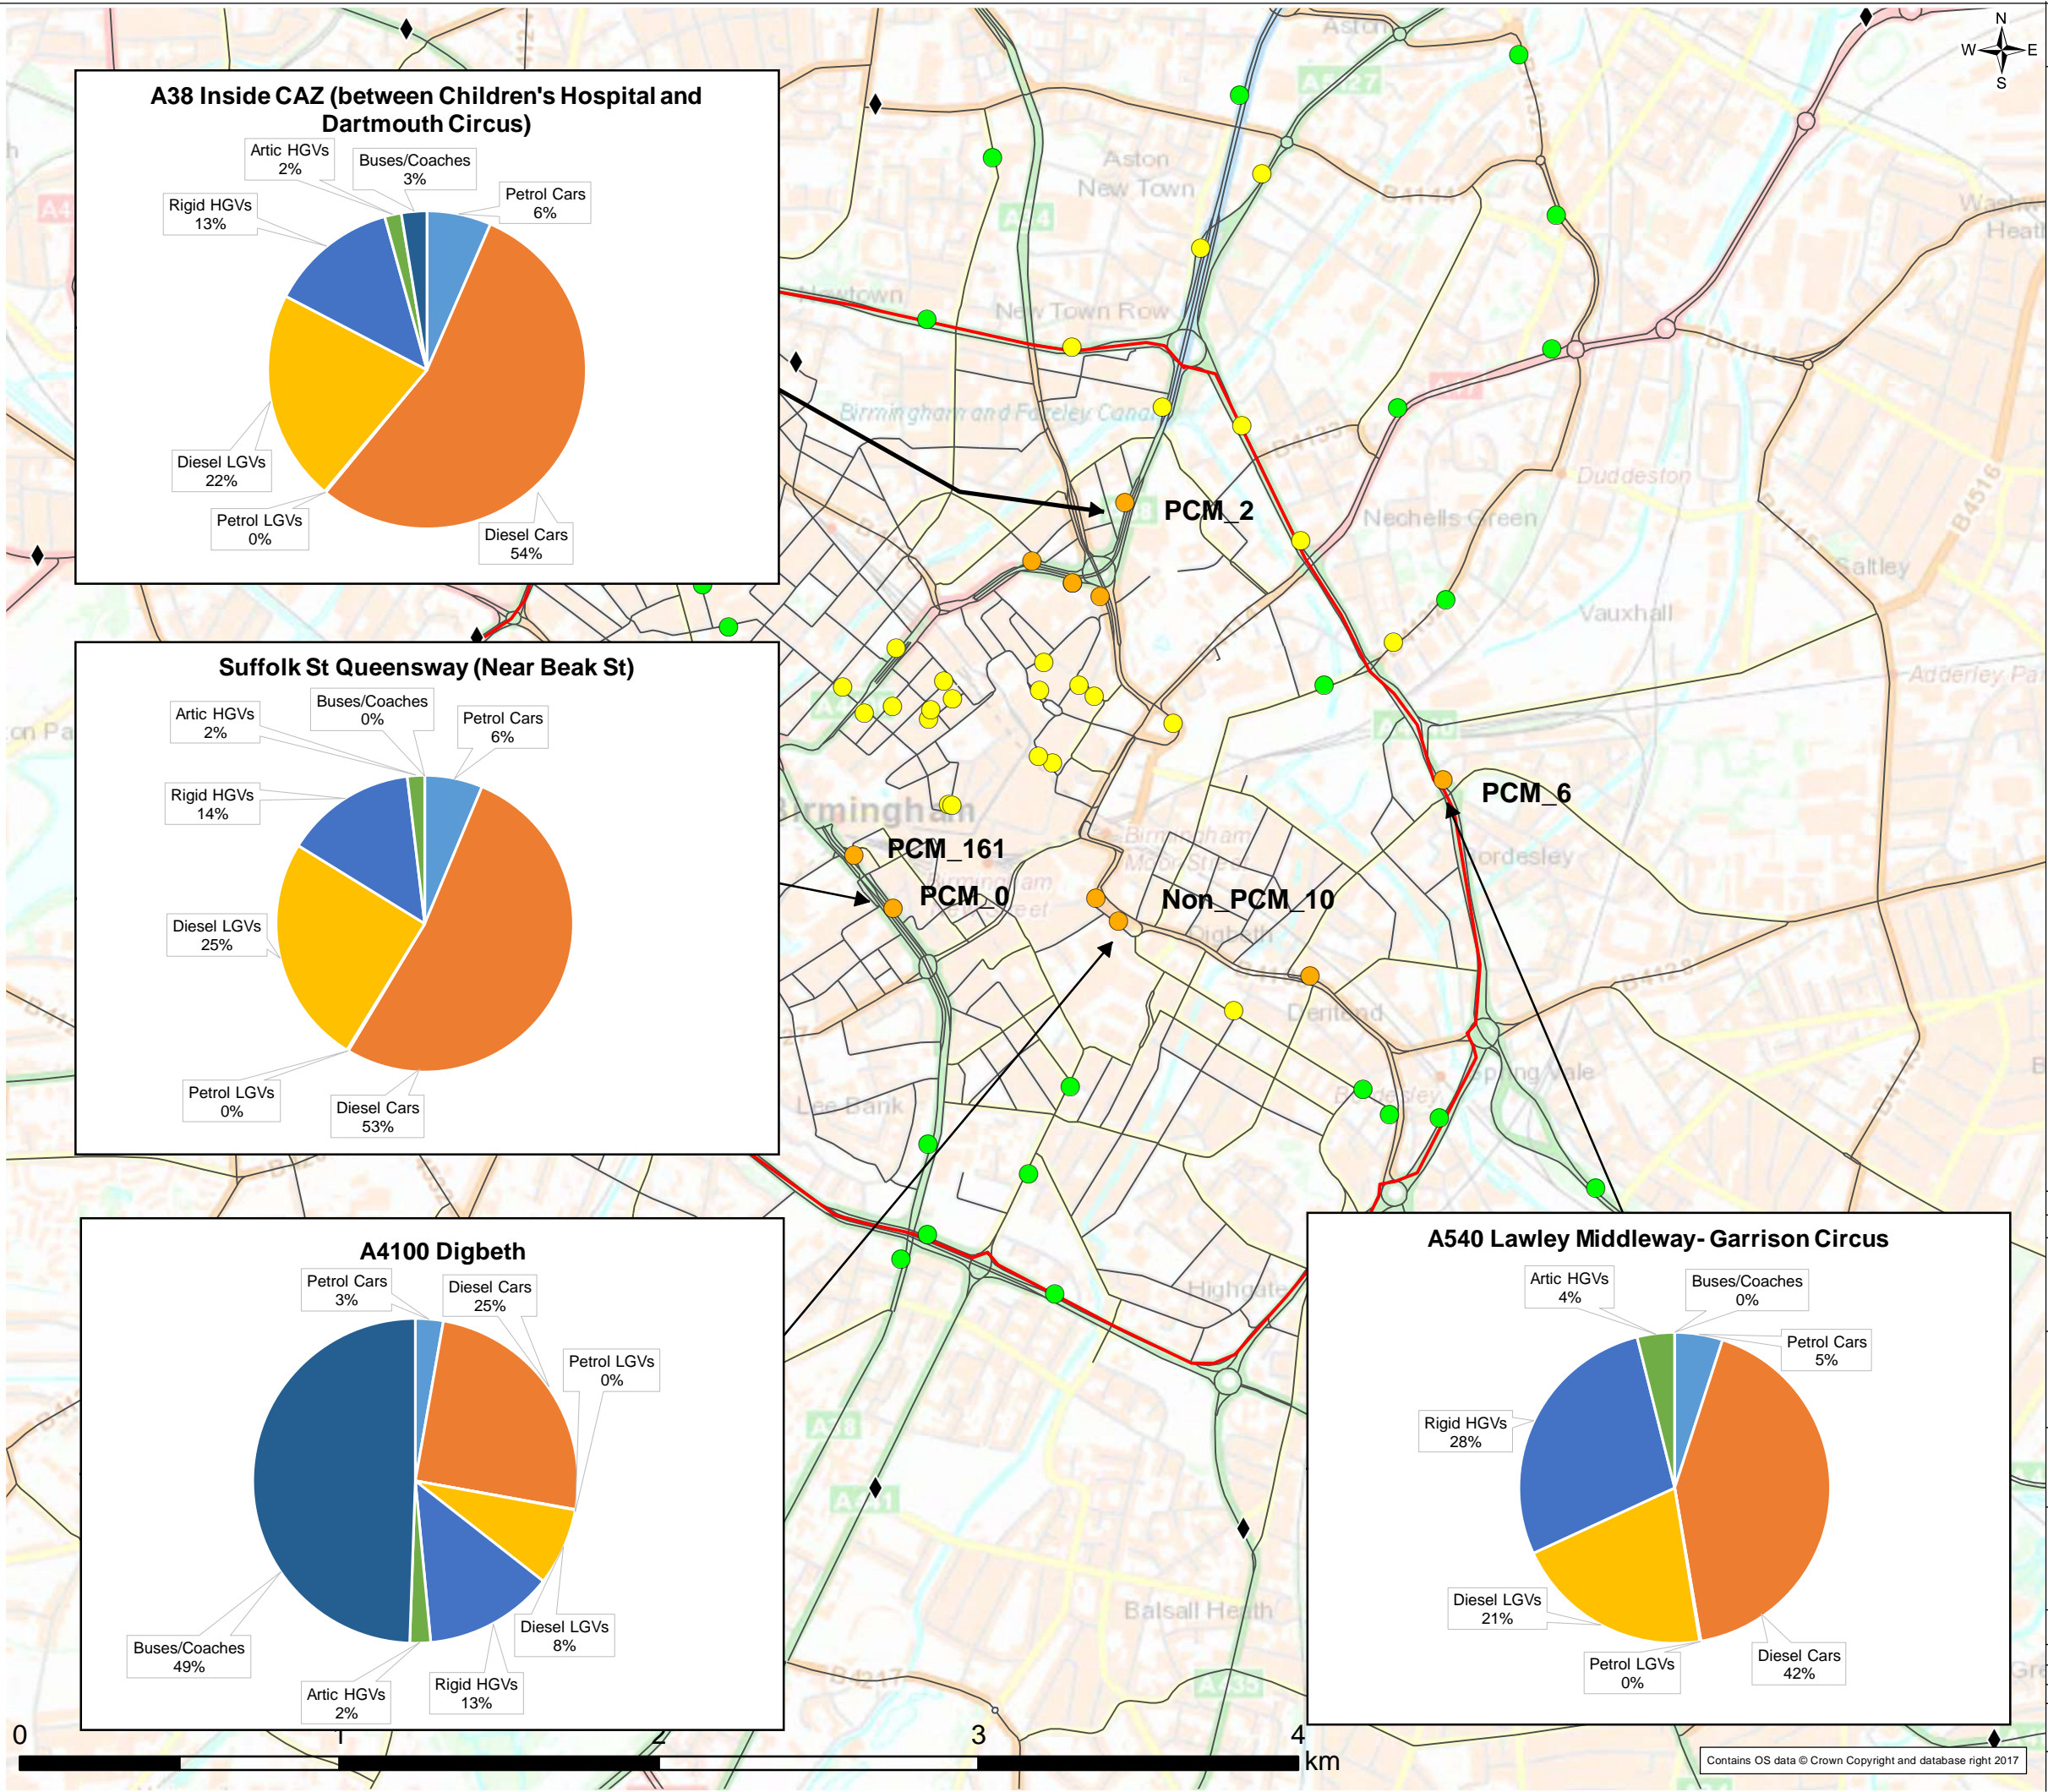

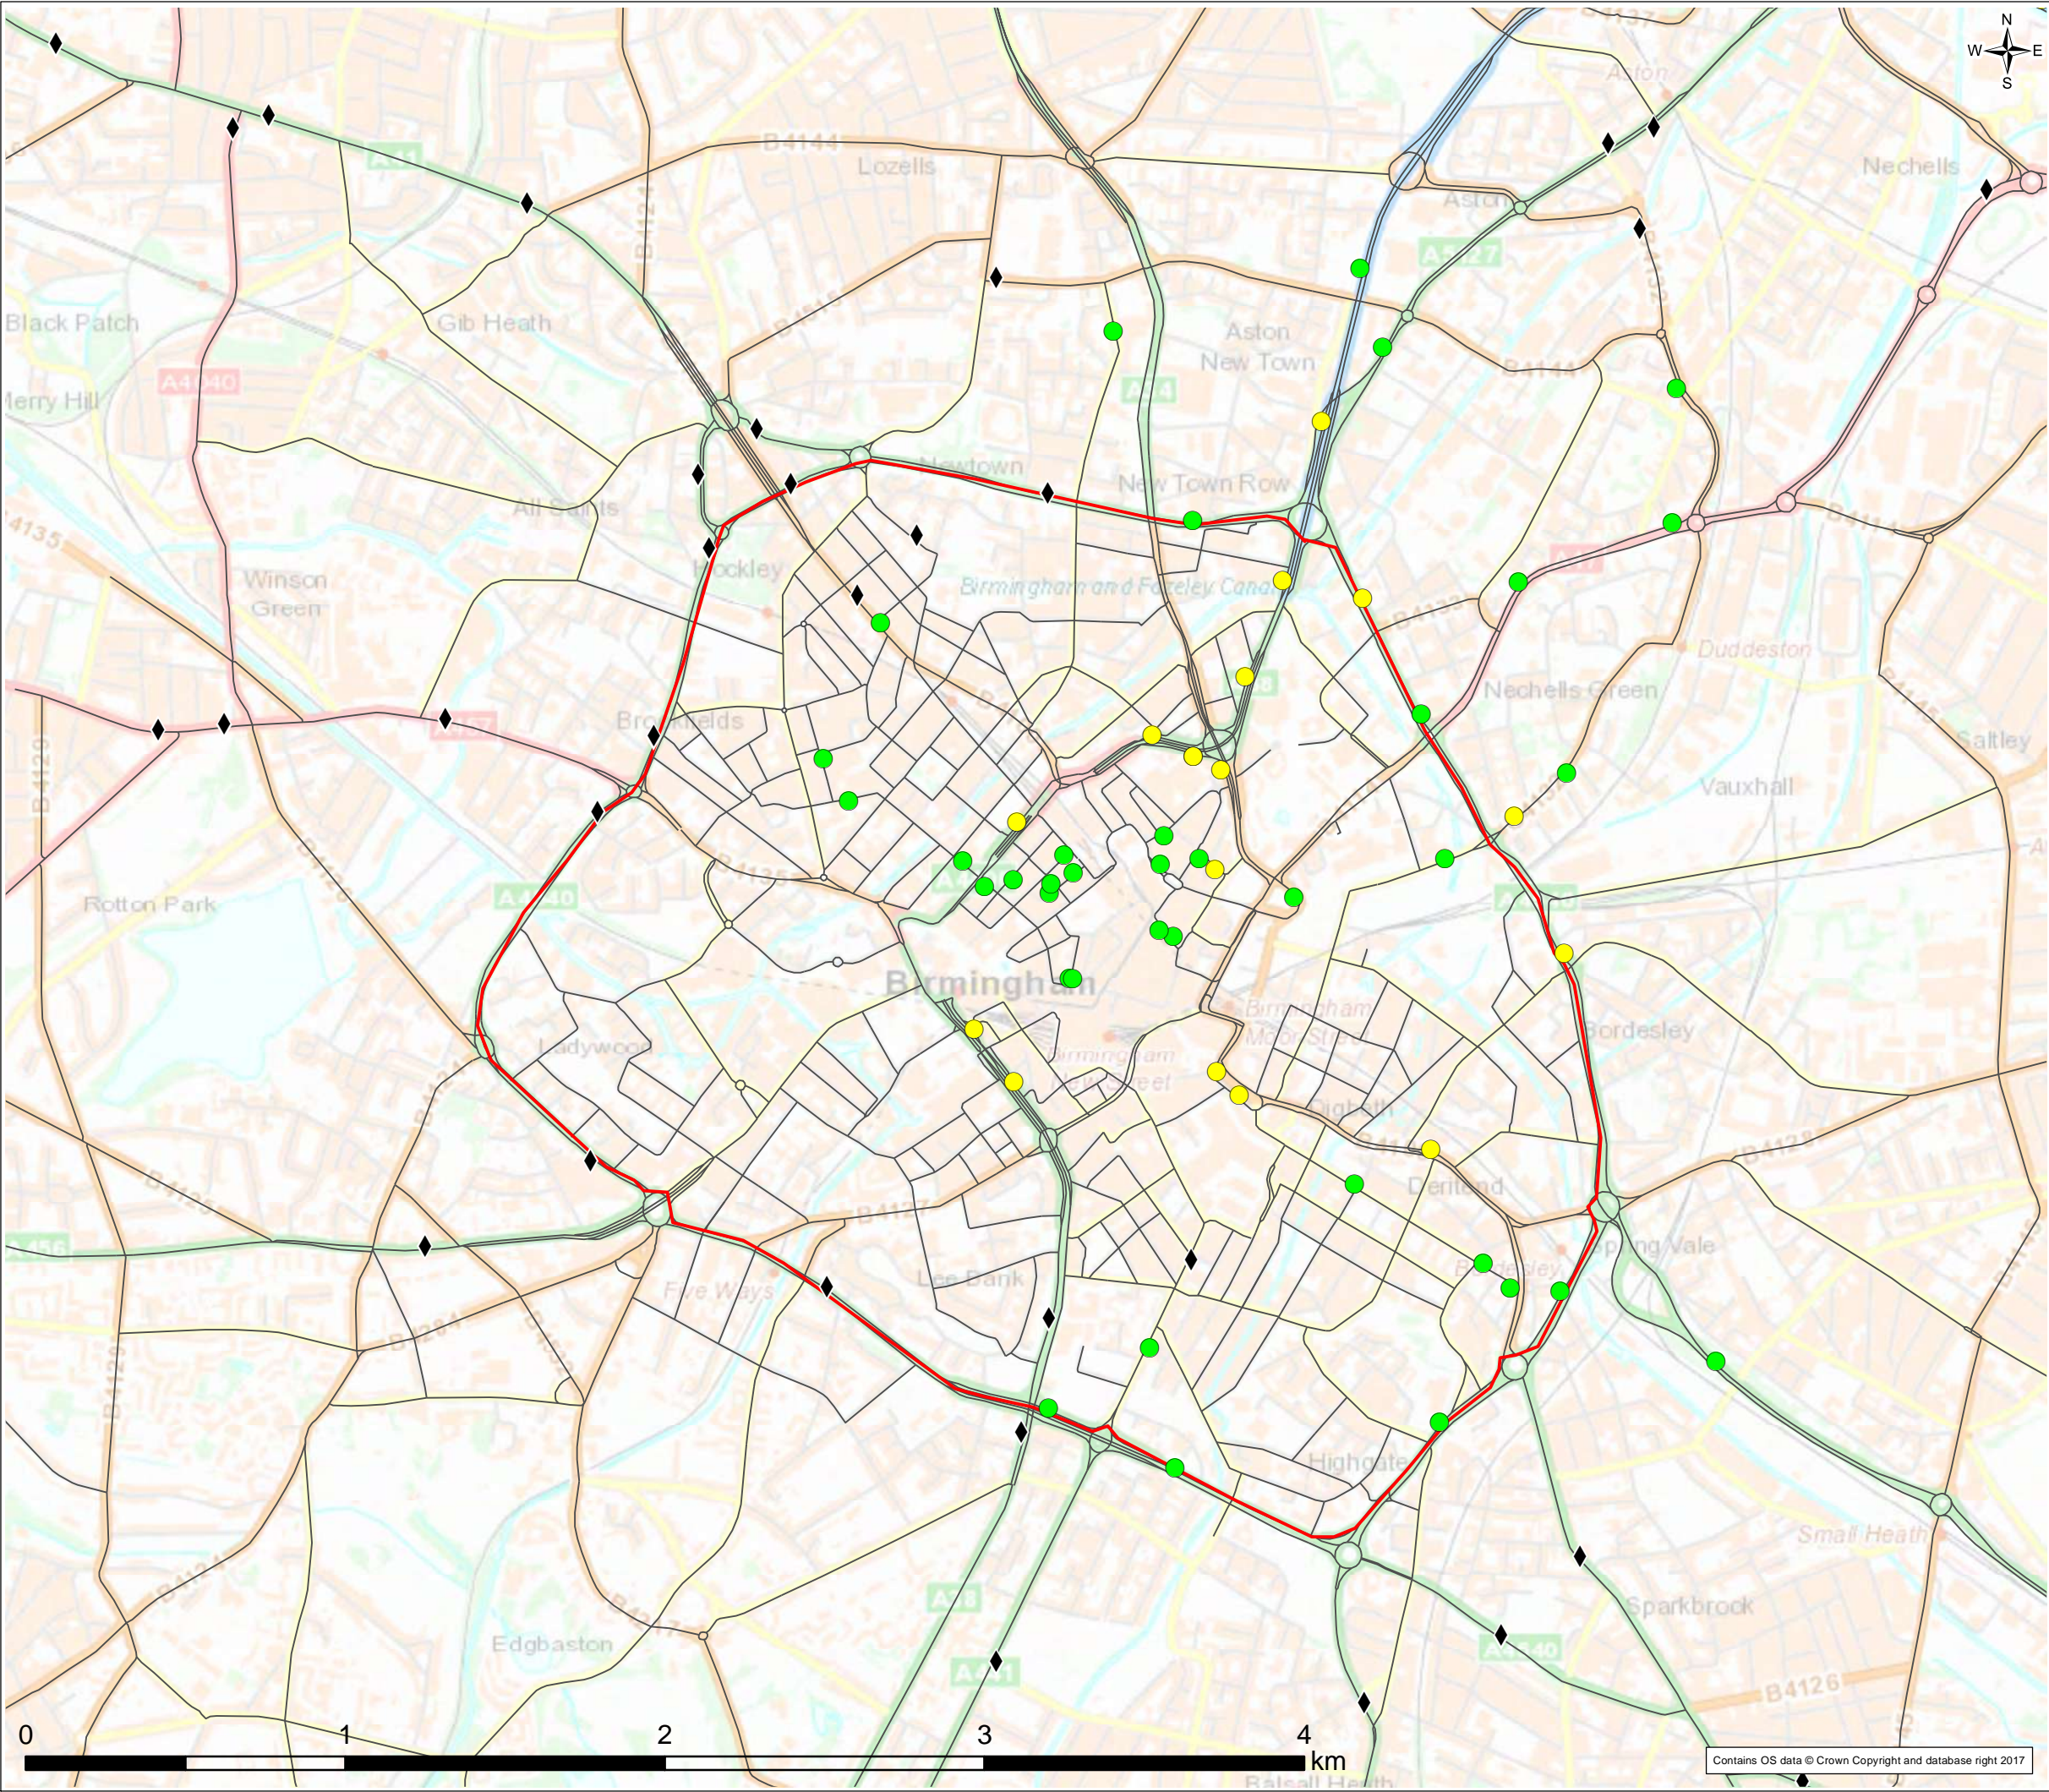


FIGURE 11

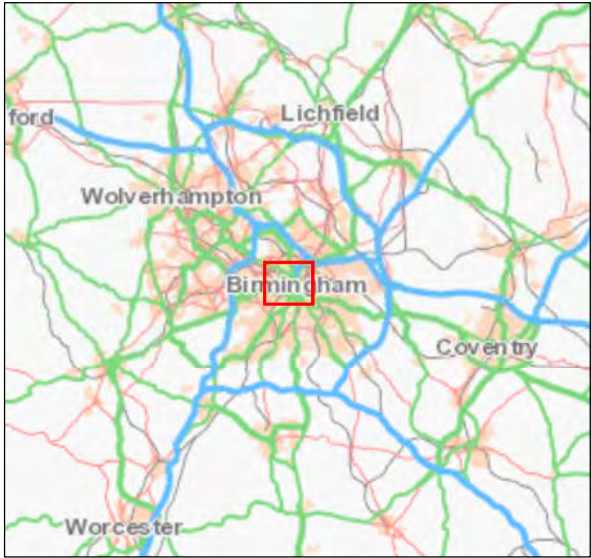
Legend

Modelled NO₂ Concentration (µg/m³)

- ◆ <35
- 35-40
- 40-45

— Proposed CAZ boundary

— Modelled Road Network




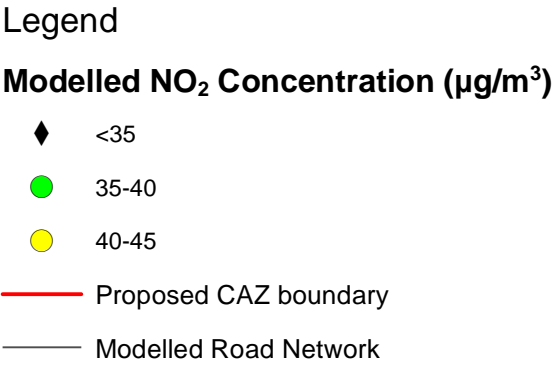

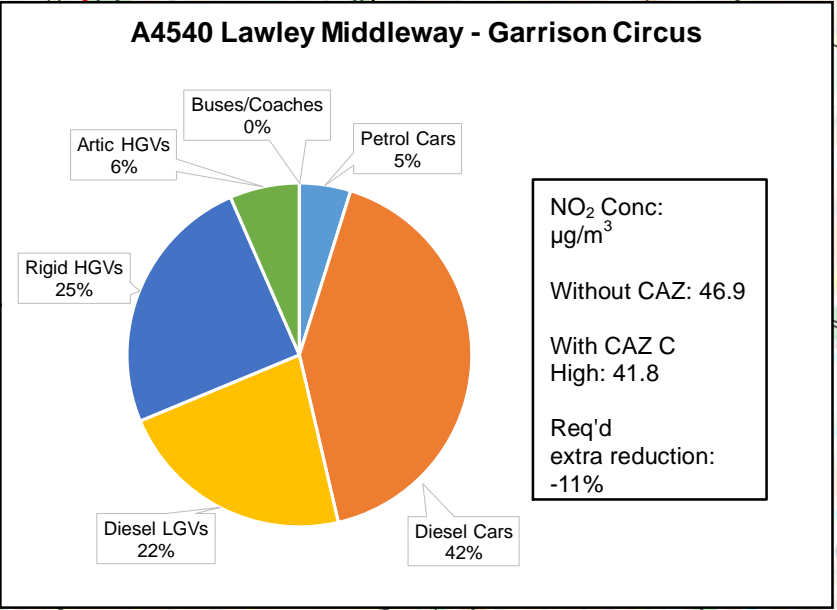
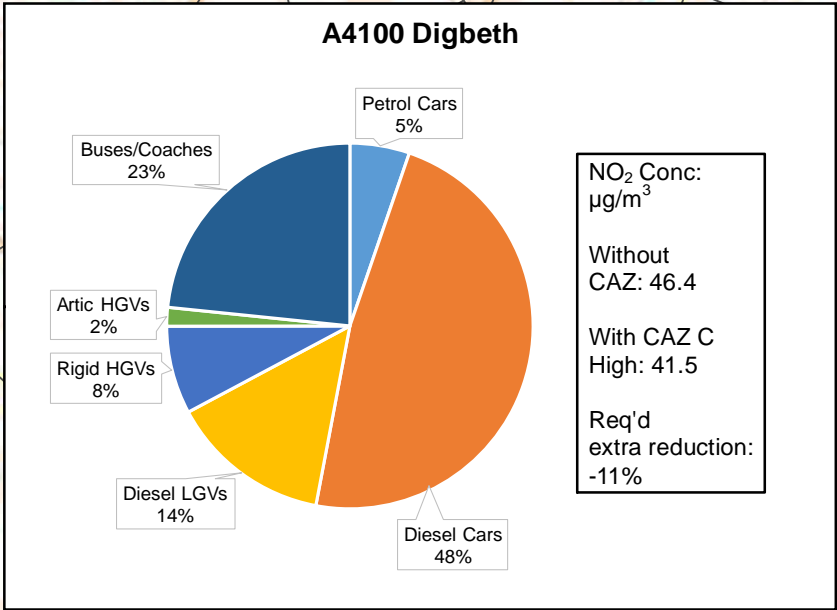
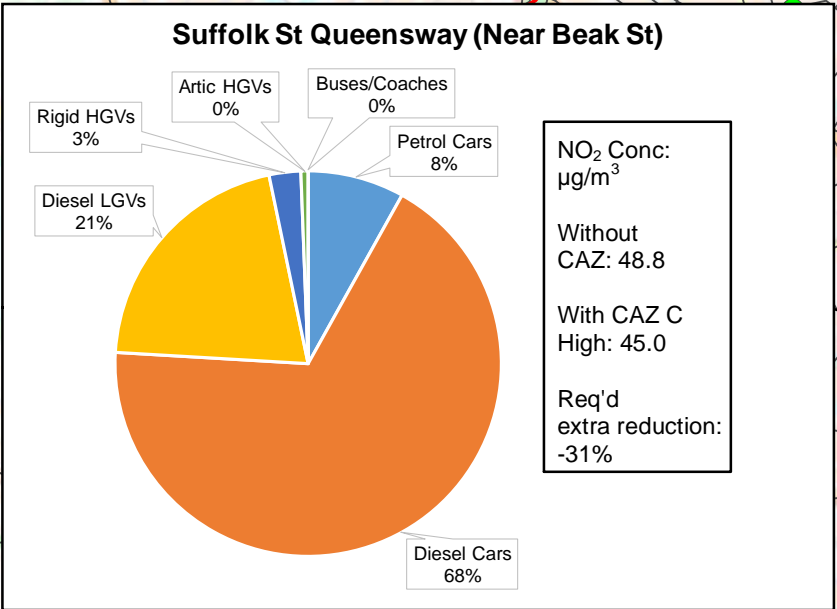
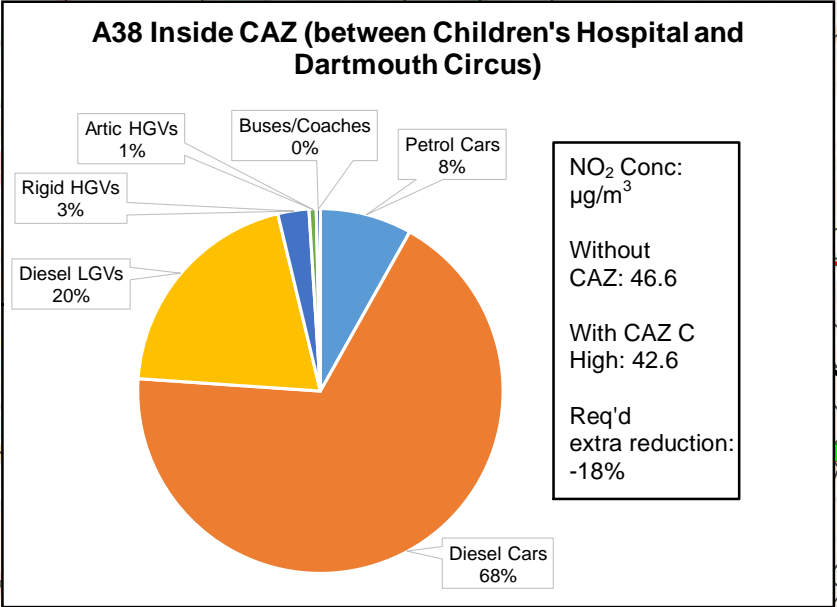
0	31/05/2018	Initial Issue		GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision		Drawn	Check'd	Rev'd	App'd
<div><div><div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div><div>Client<div><div><div>Birmingham City Council</div></div></div></div><div>Project<div>BIRMINGHAM CLEAN AIR ZONE</div></div><div>Drawing Title<div>ANNUAL MEAN NO₂ CONCENTRATIONS - 2020 CAZ C HIGH CHARGE</div></div></div></div>							
Scale @ A3		1:20,000			DO NOT SCALE		
Jacobs No.		B2309019					
<div>This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.</div>							

FIGURE 12



0	31/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div>JACOBS®</div> <div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div>						
Client						
<div> Birmingham City Council</div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
LOCATIONS OF KEY NO ₂ EXCEEDANCE AND SOURCE APPORTIONMENT WITH CAZ C (HIGH CHARGE) SCENARIO (2020)						
Scale @ A3		1:20,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						



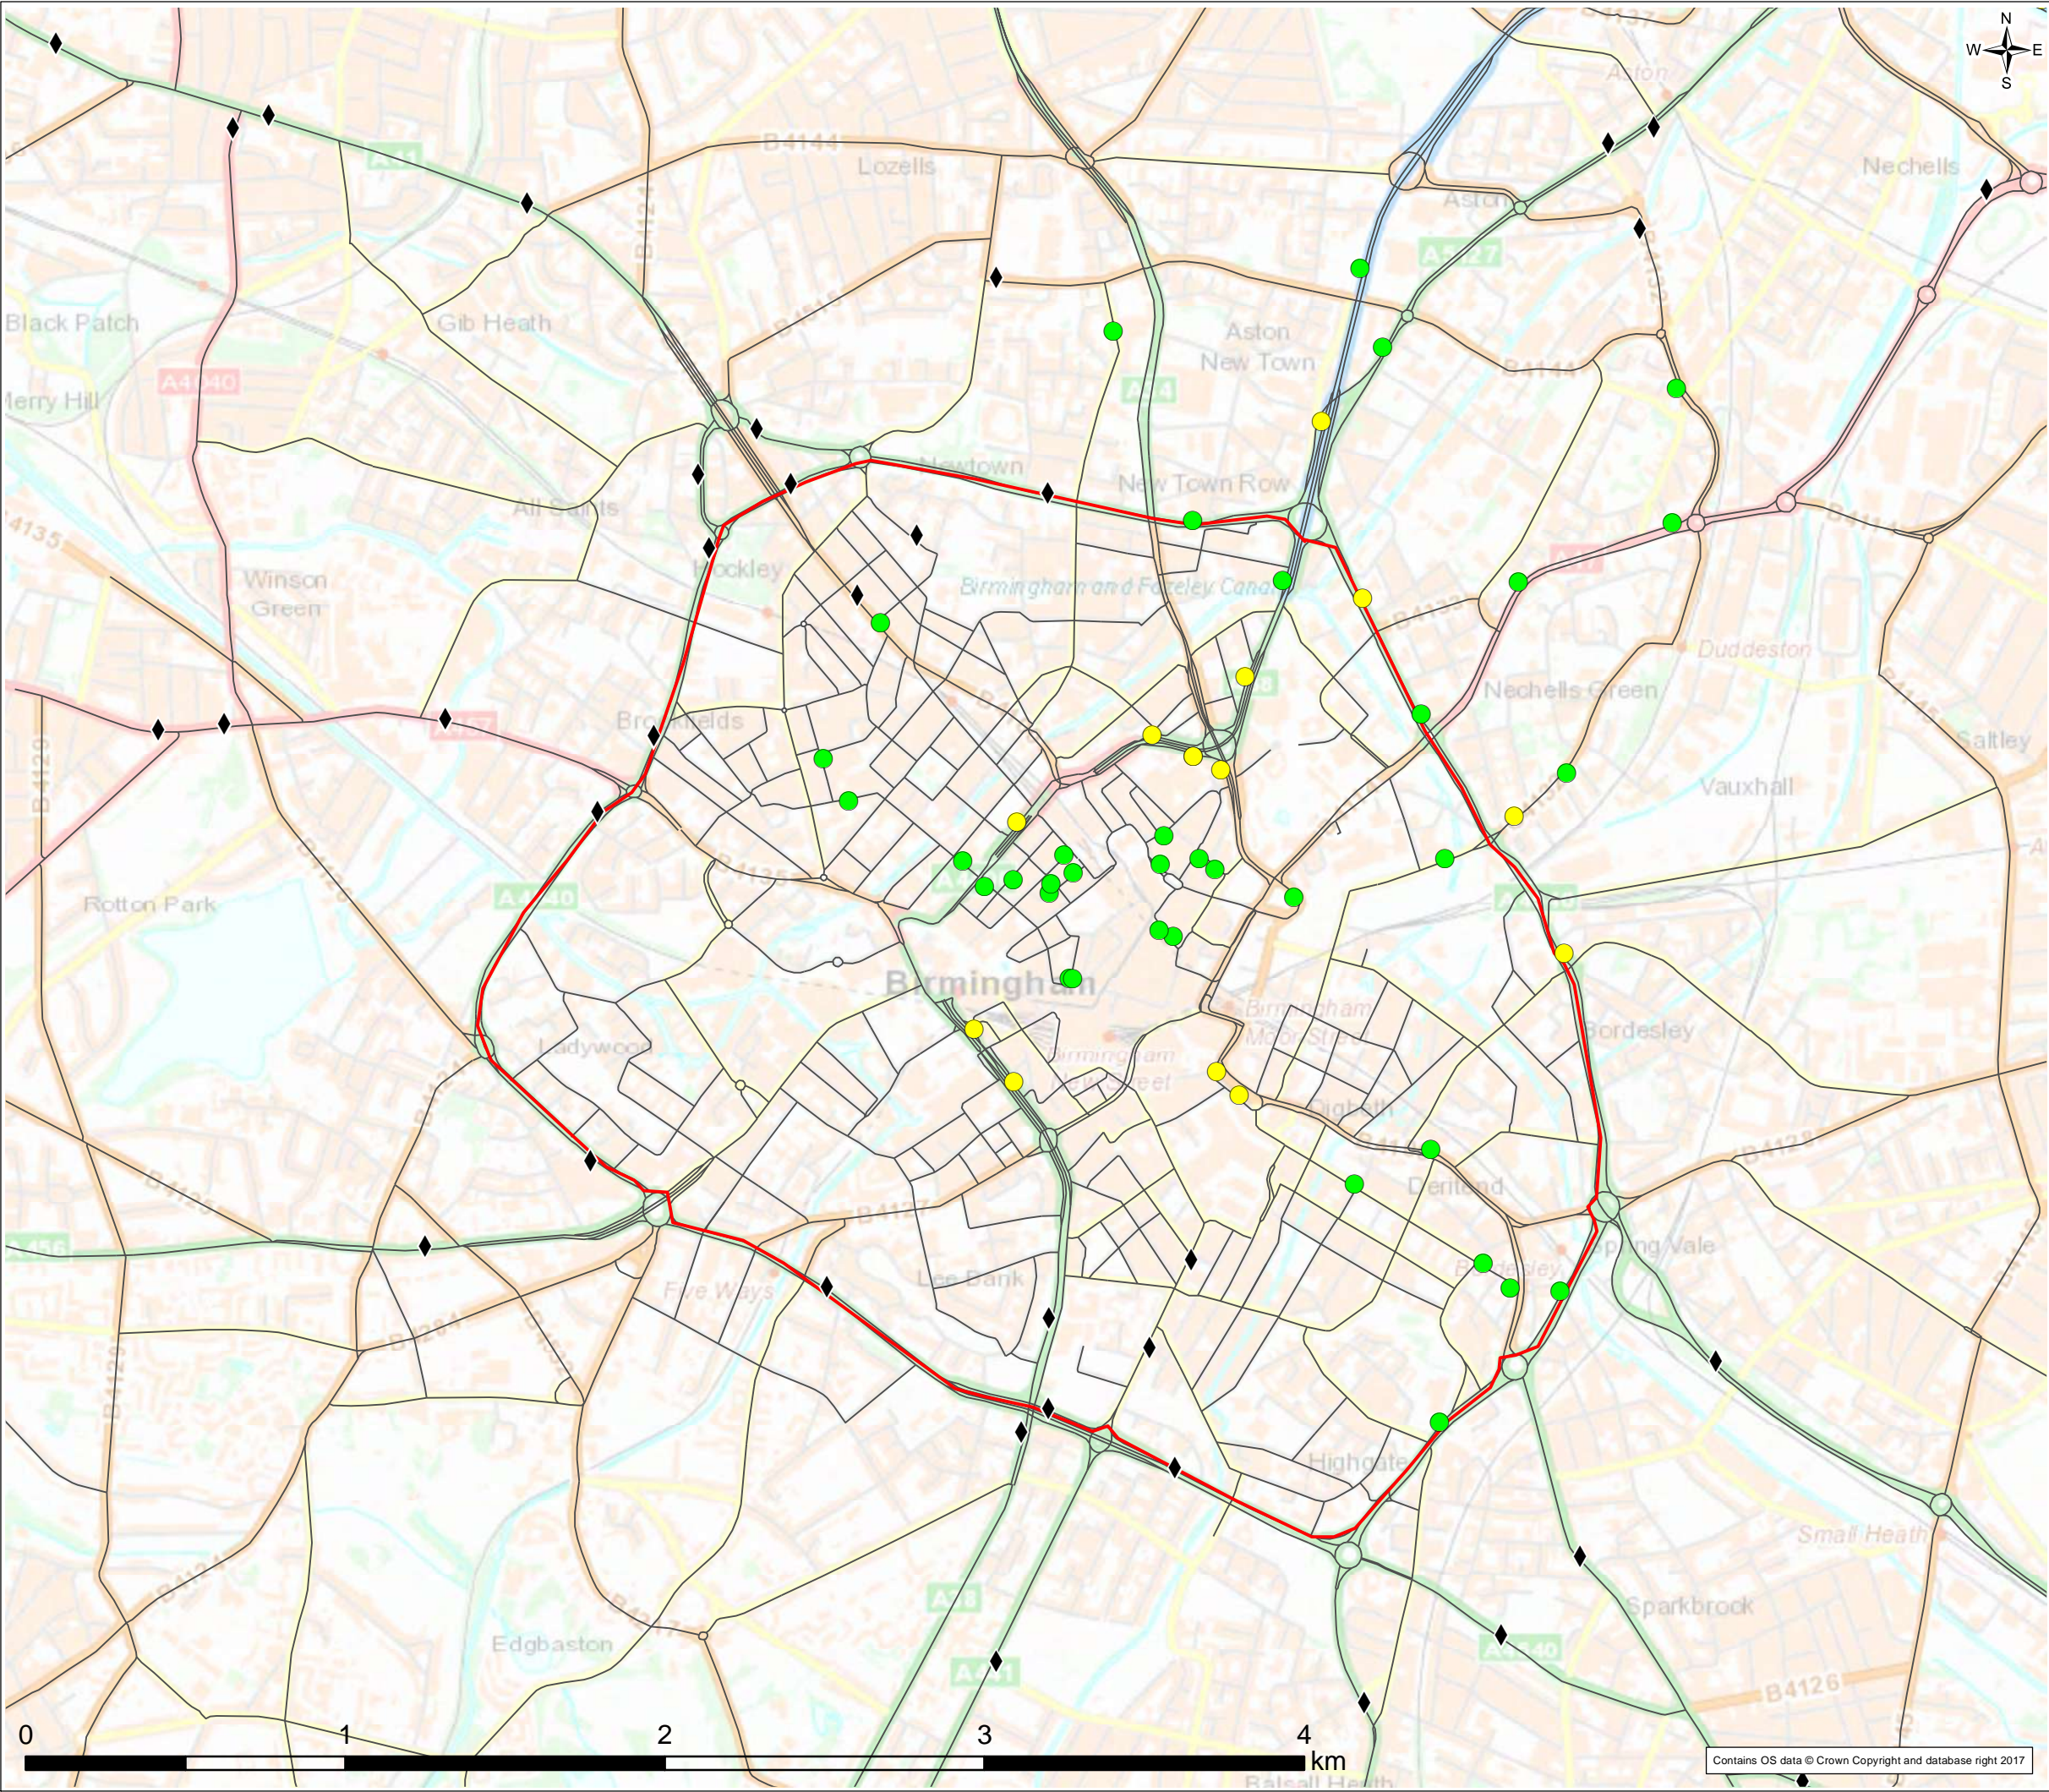


FIGURE 13

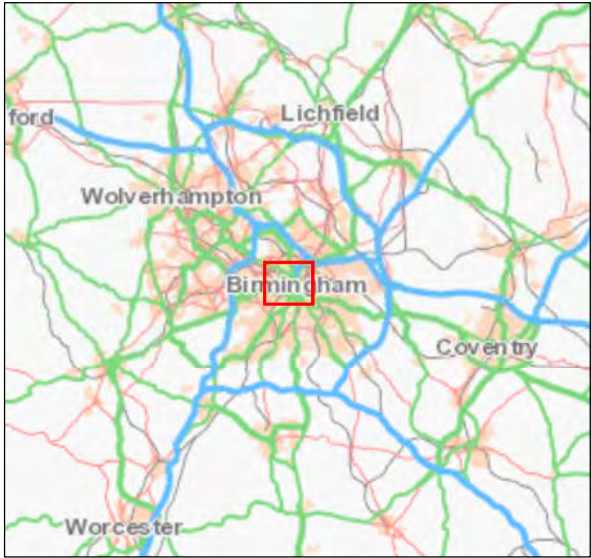
Legend

Modelled NO₂ Concentration (µg/m³)

- ◆ <35
- 35-40
- 40-45

— Proposed CAZ boundary

— Modelled Road Network



0	31/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div><div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div></div>						
Client						
<div><div><div><div></div></div><div>Birmingham City Council</div></div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
ANNUAL MEAN NO ₂ CONCENTRATIONS - 2020 CAZ D MEDIUM CHARGE						
Scale @ A3		1:20,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

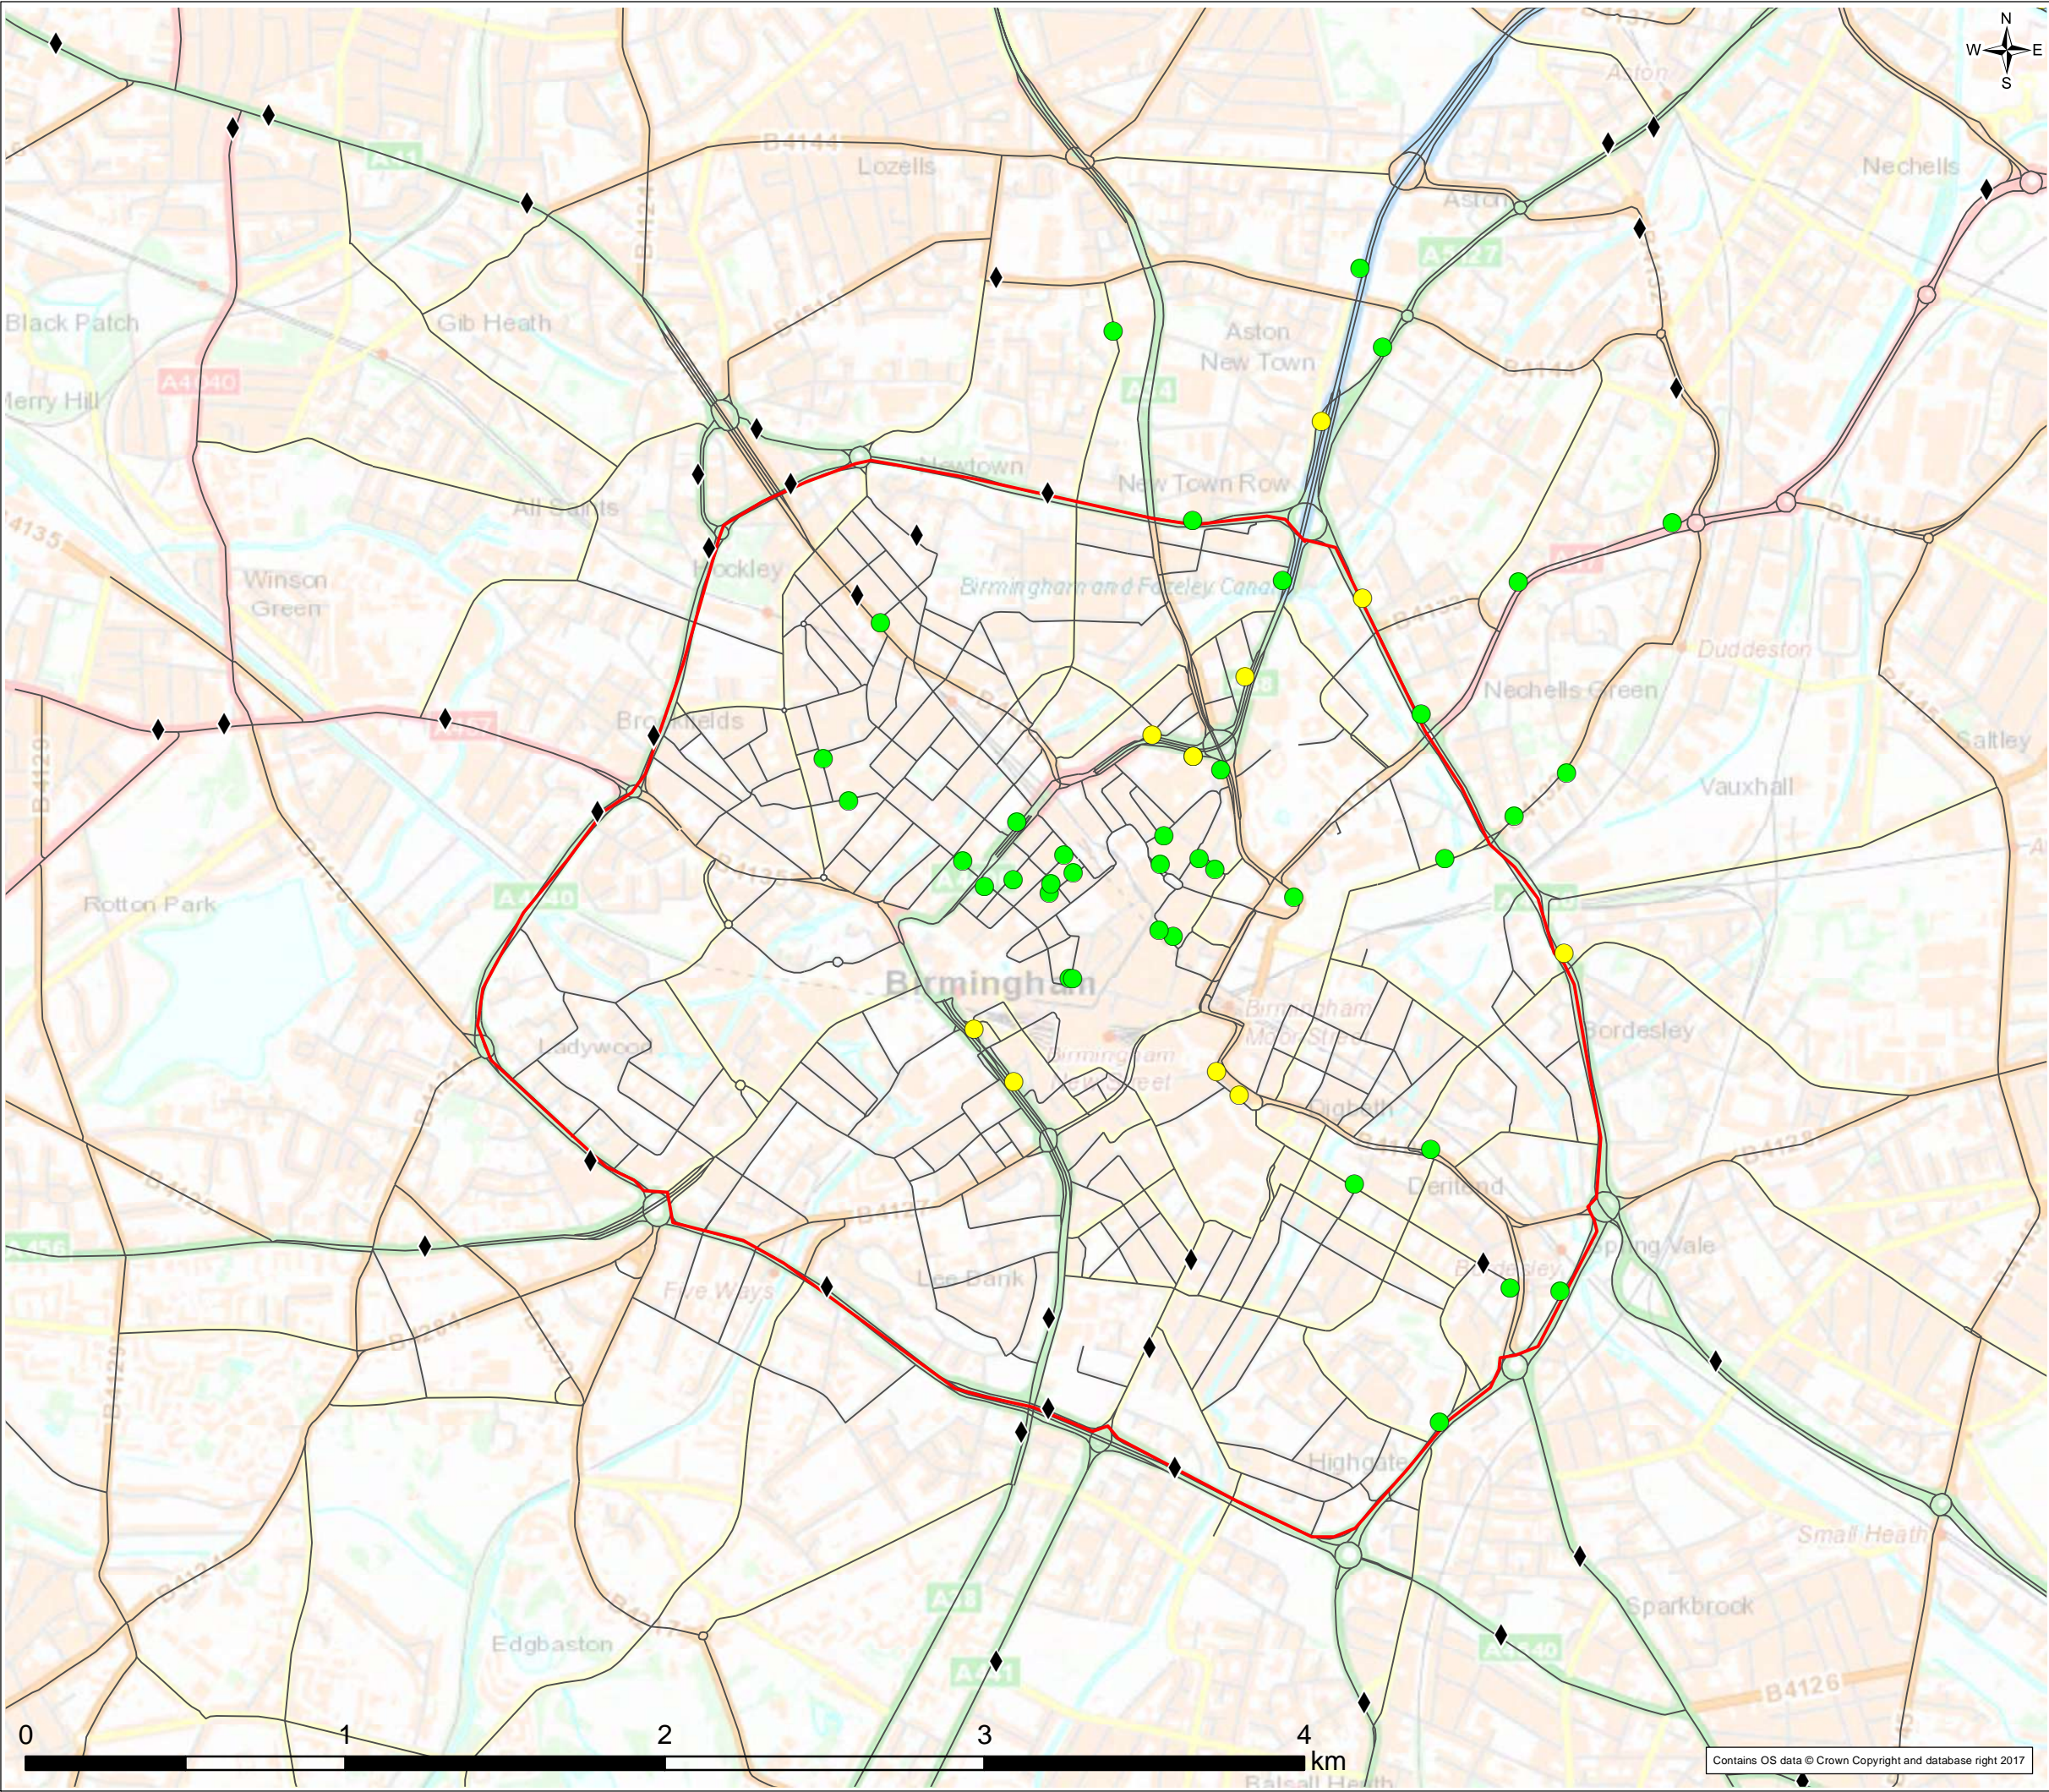


FIGURE 14

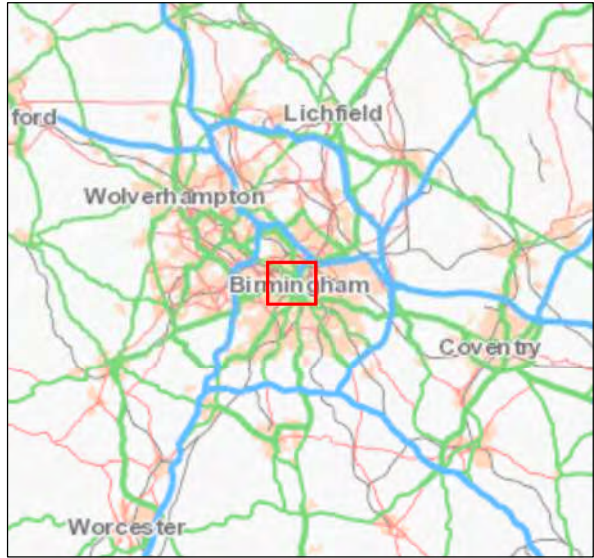
Legend

Modelled NO₂ Concentration (µg/m³)

- ◆ <35
- 35-40
- 40-45


— Proposed CAZ boundary



— Modelled Road Network

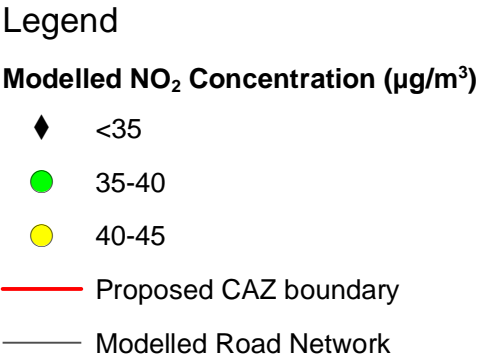



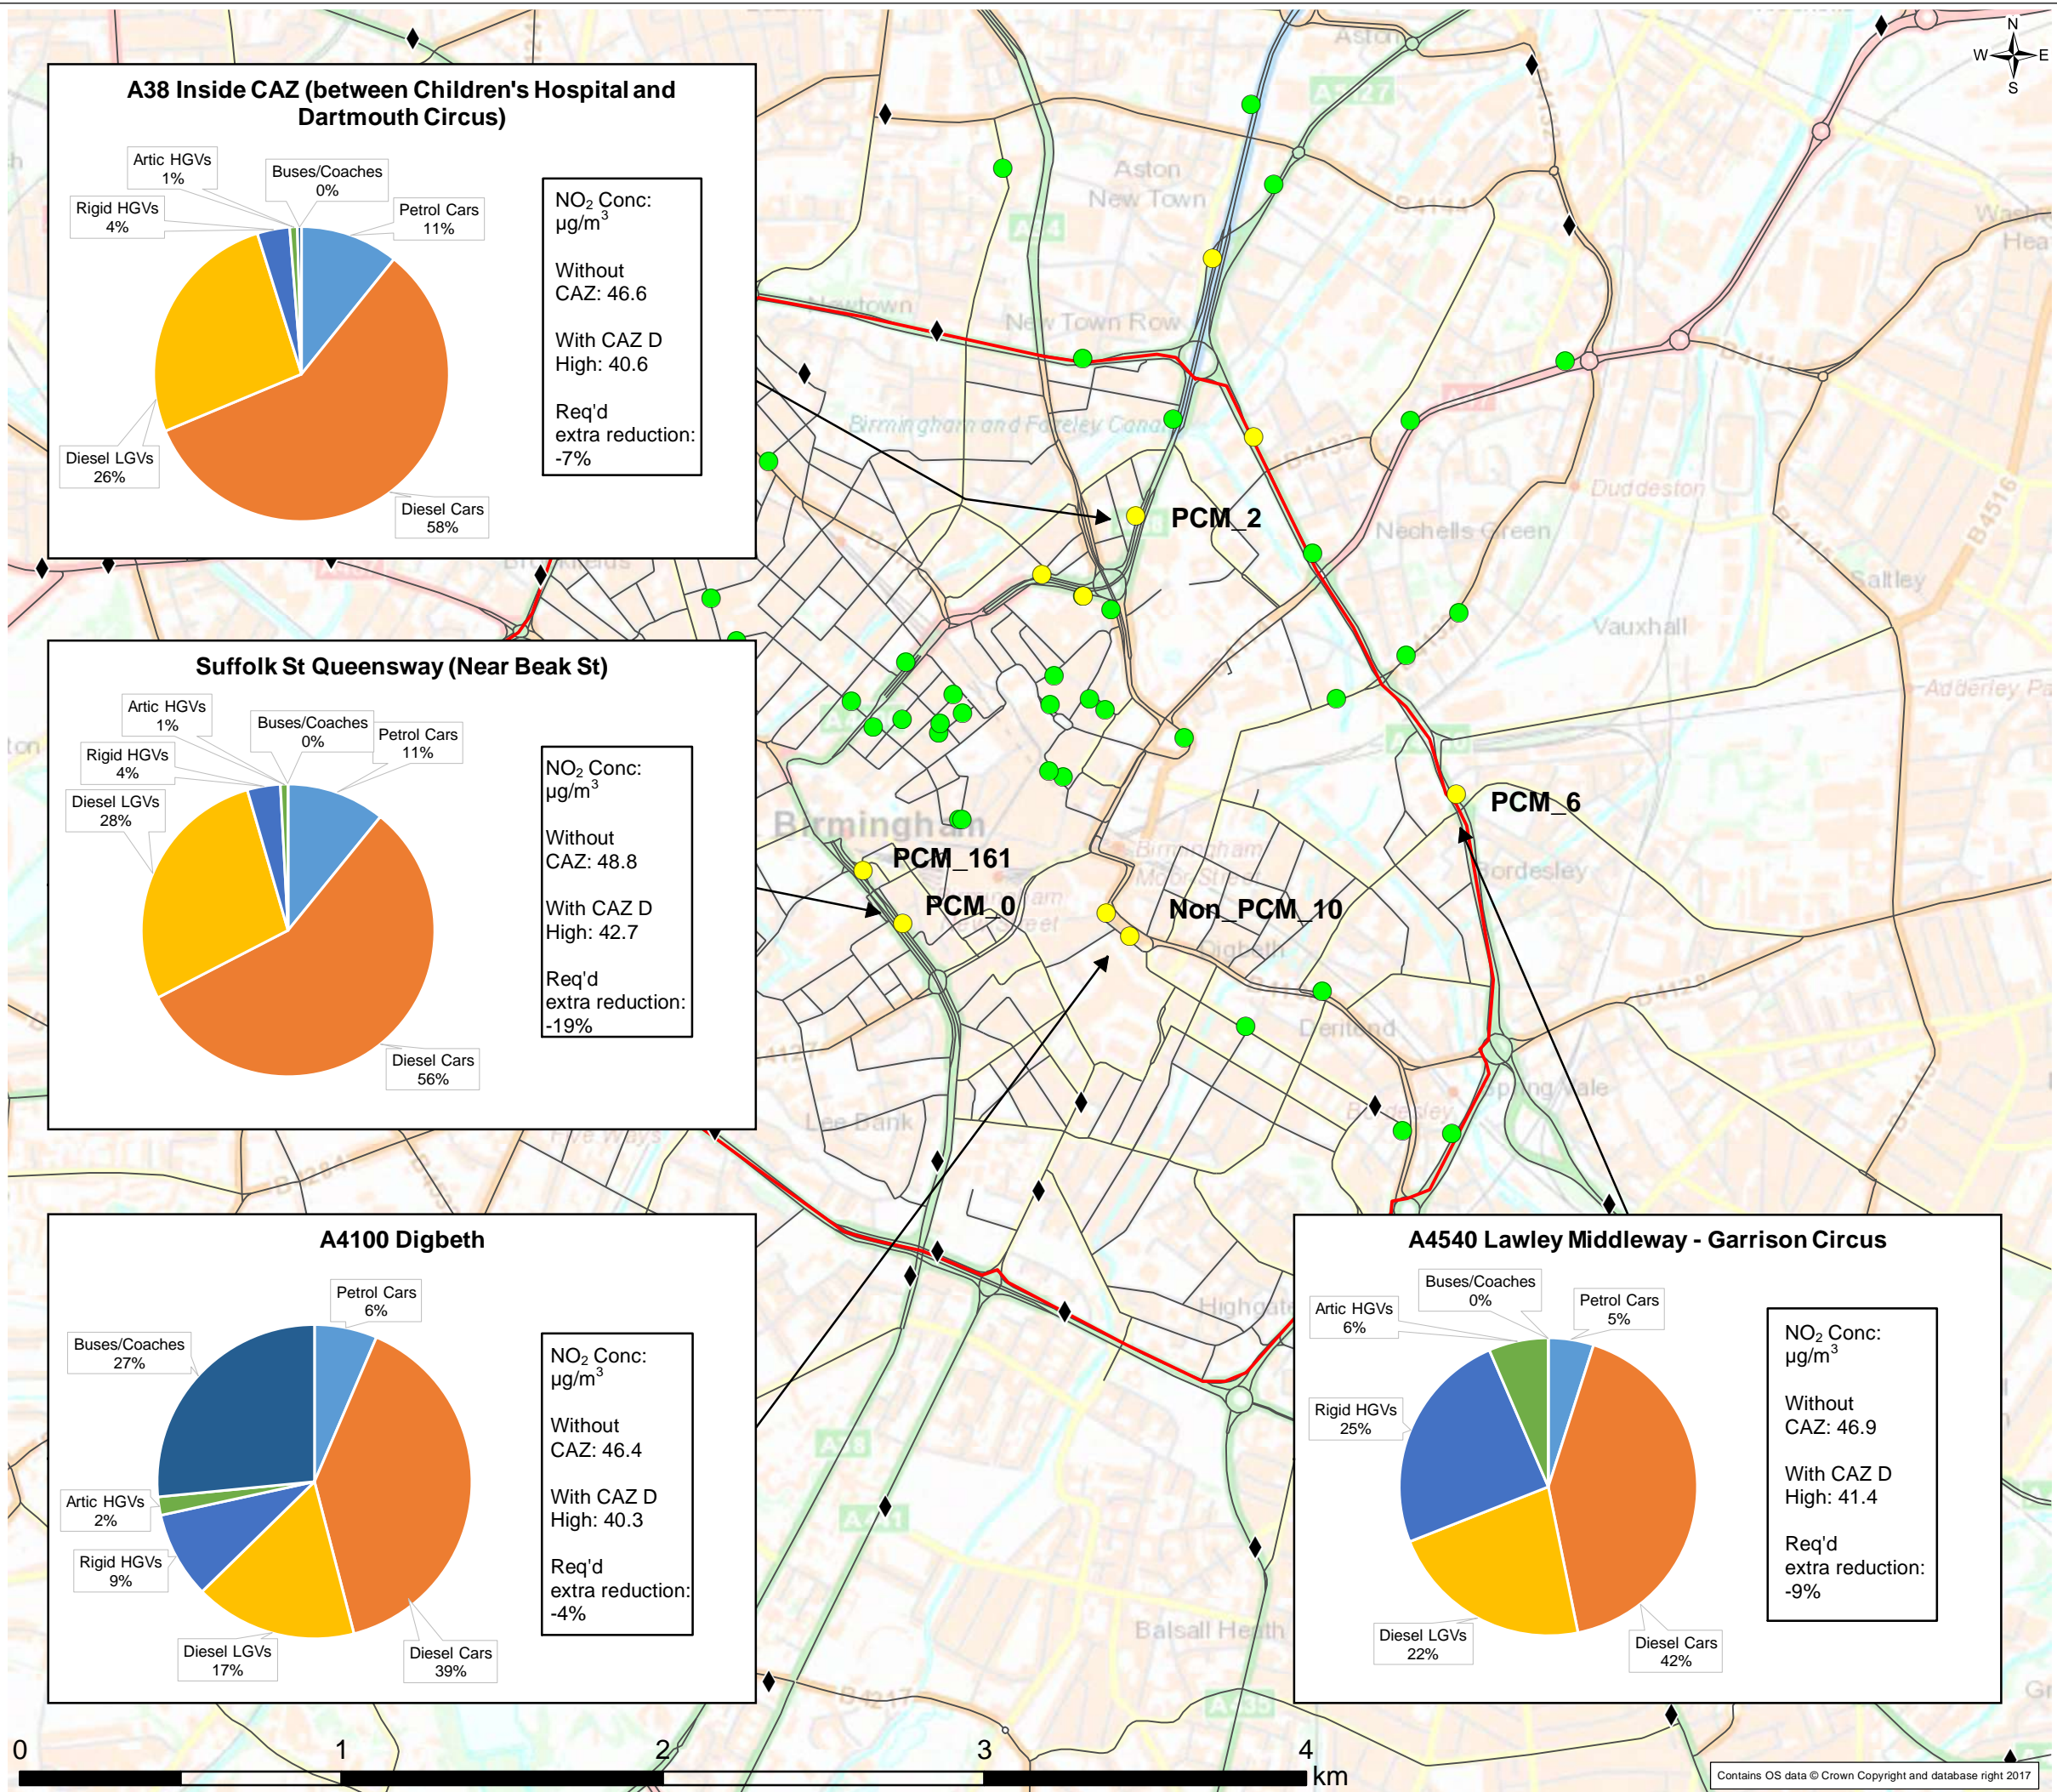
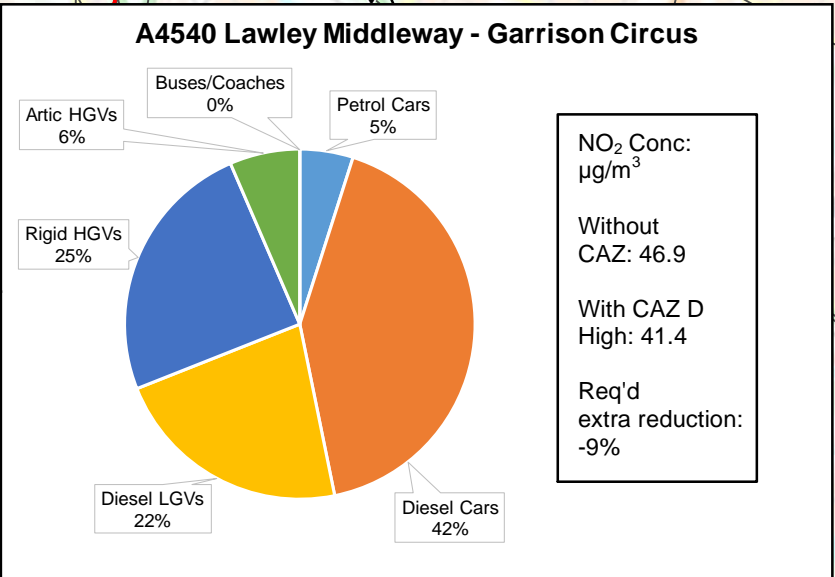
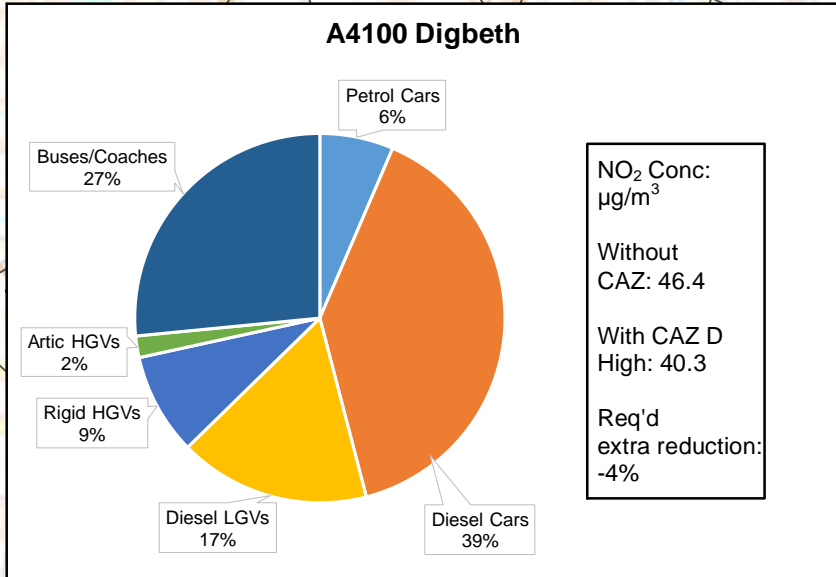
0	31/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd
<div><div>JACOBS</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44 (0)121 237 4001 www.jacobs.com</div></div>						
Client <div><div>Birmingham City Council</div></div>						
Project <div>BIRMINGHAM CLEAN AIR ZONE</div>						
Drawing Title <div>ANNUAL MEAN NO₂ CONCENTRATIONS - 2020 CAZ D HIGH CHARGE</div>						
Scale @ A3 <div>1:20,000</div> <div>DO NOT SCALE</div>						
Jacobs No. <div>B2309019</div>						
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

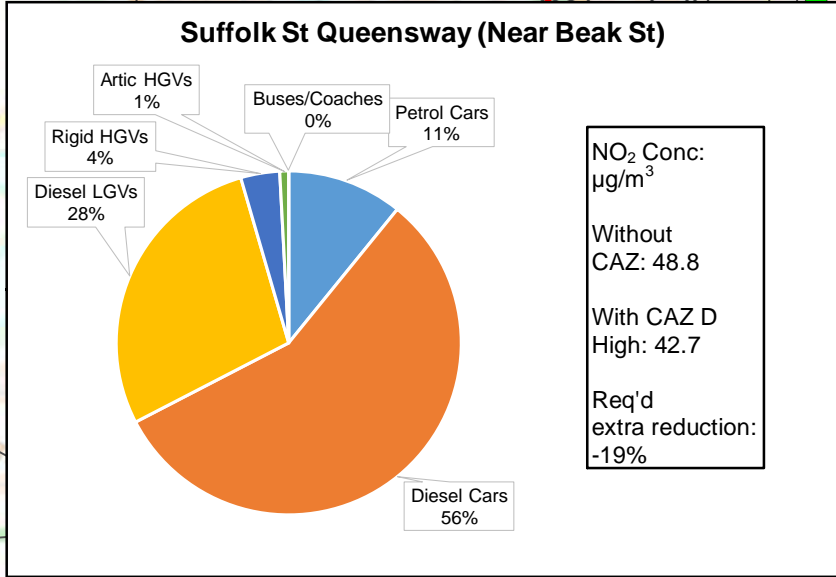FIGURE 15



0	31/05/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div></div> <div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div>						
Client <div></div>						
Project <div>BIRMINGHAM CLEAN AIR ZONE</div>						
Drawing Title <div>LOCATIONS OF KEY NO₂ EXCEEDANCE AND SOURCE APPORTIONMENT WITH CAZ D (HIGH CHARGE) SCENARIO (2020)</div>						
Scale @ A3		1:20,000			DO NOT SCALE	
Jacobs No.		B2309019				

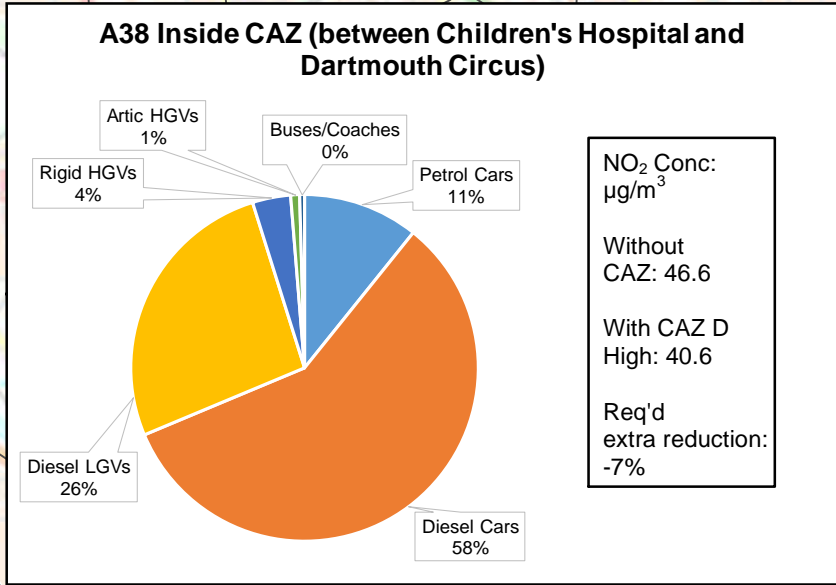This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.



Contains OS data © Crown Copyright and database right 2017

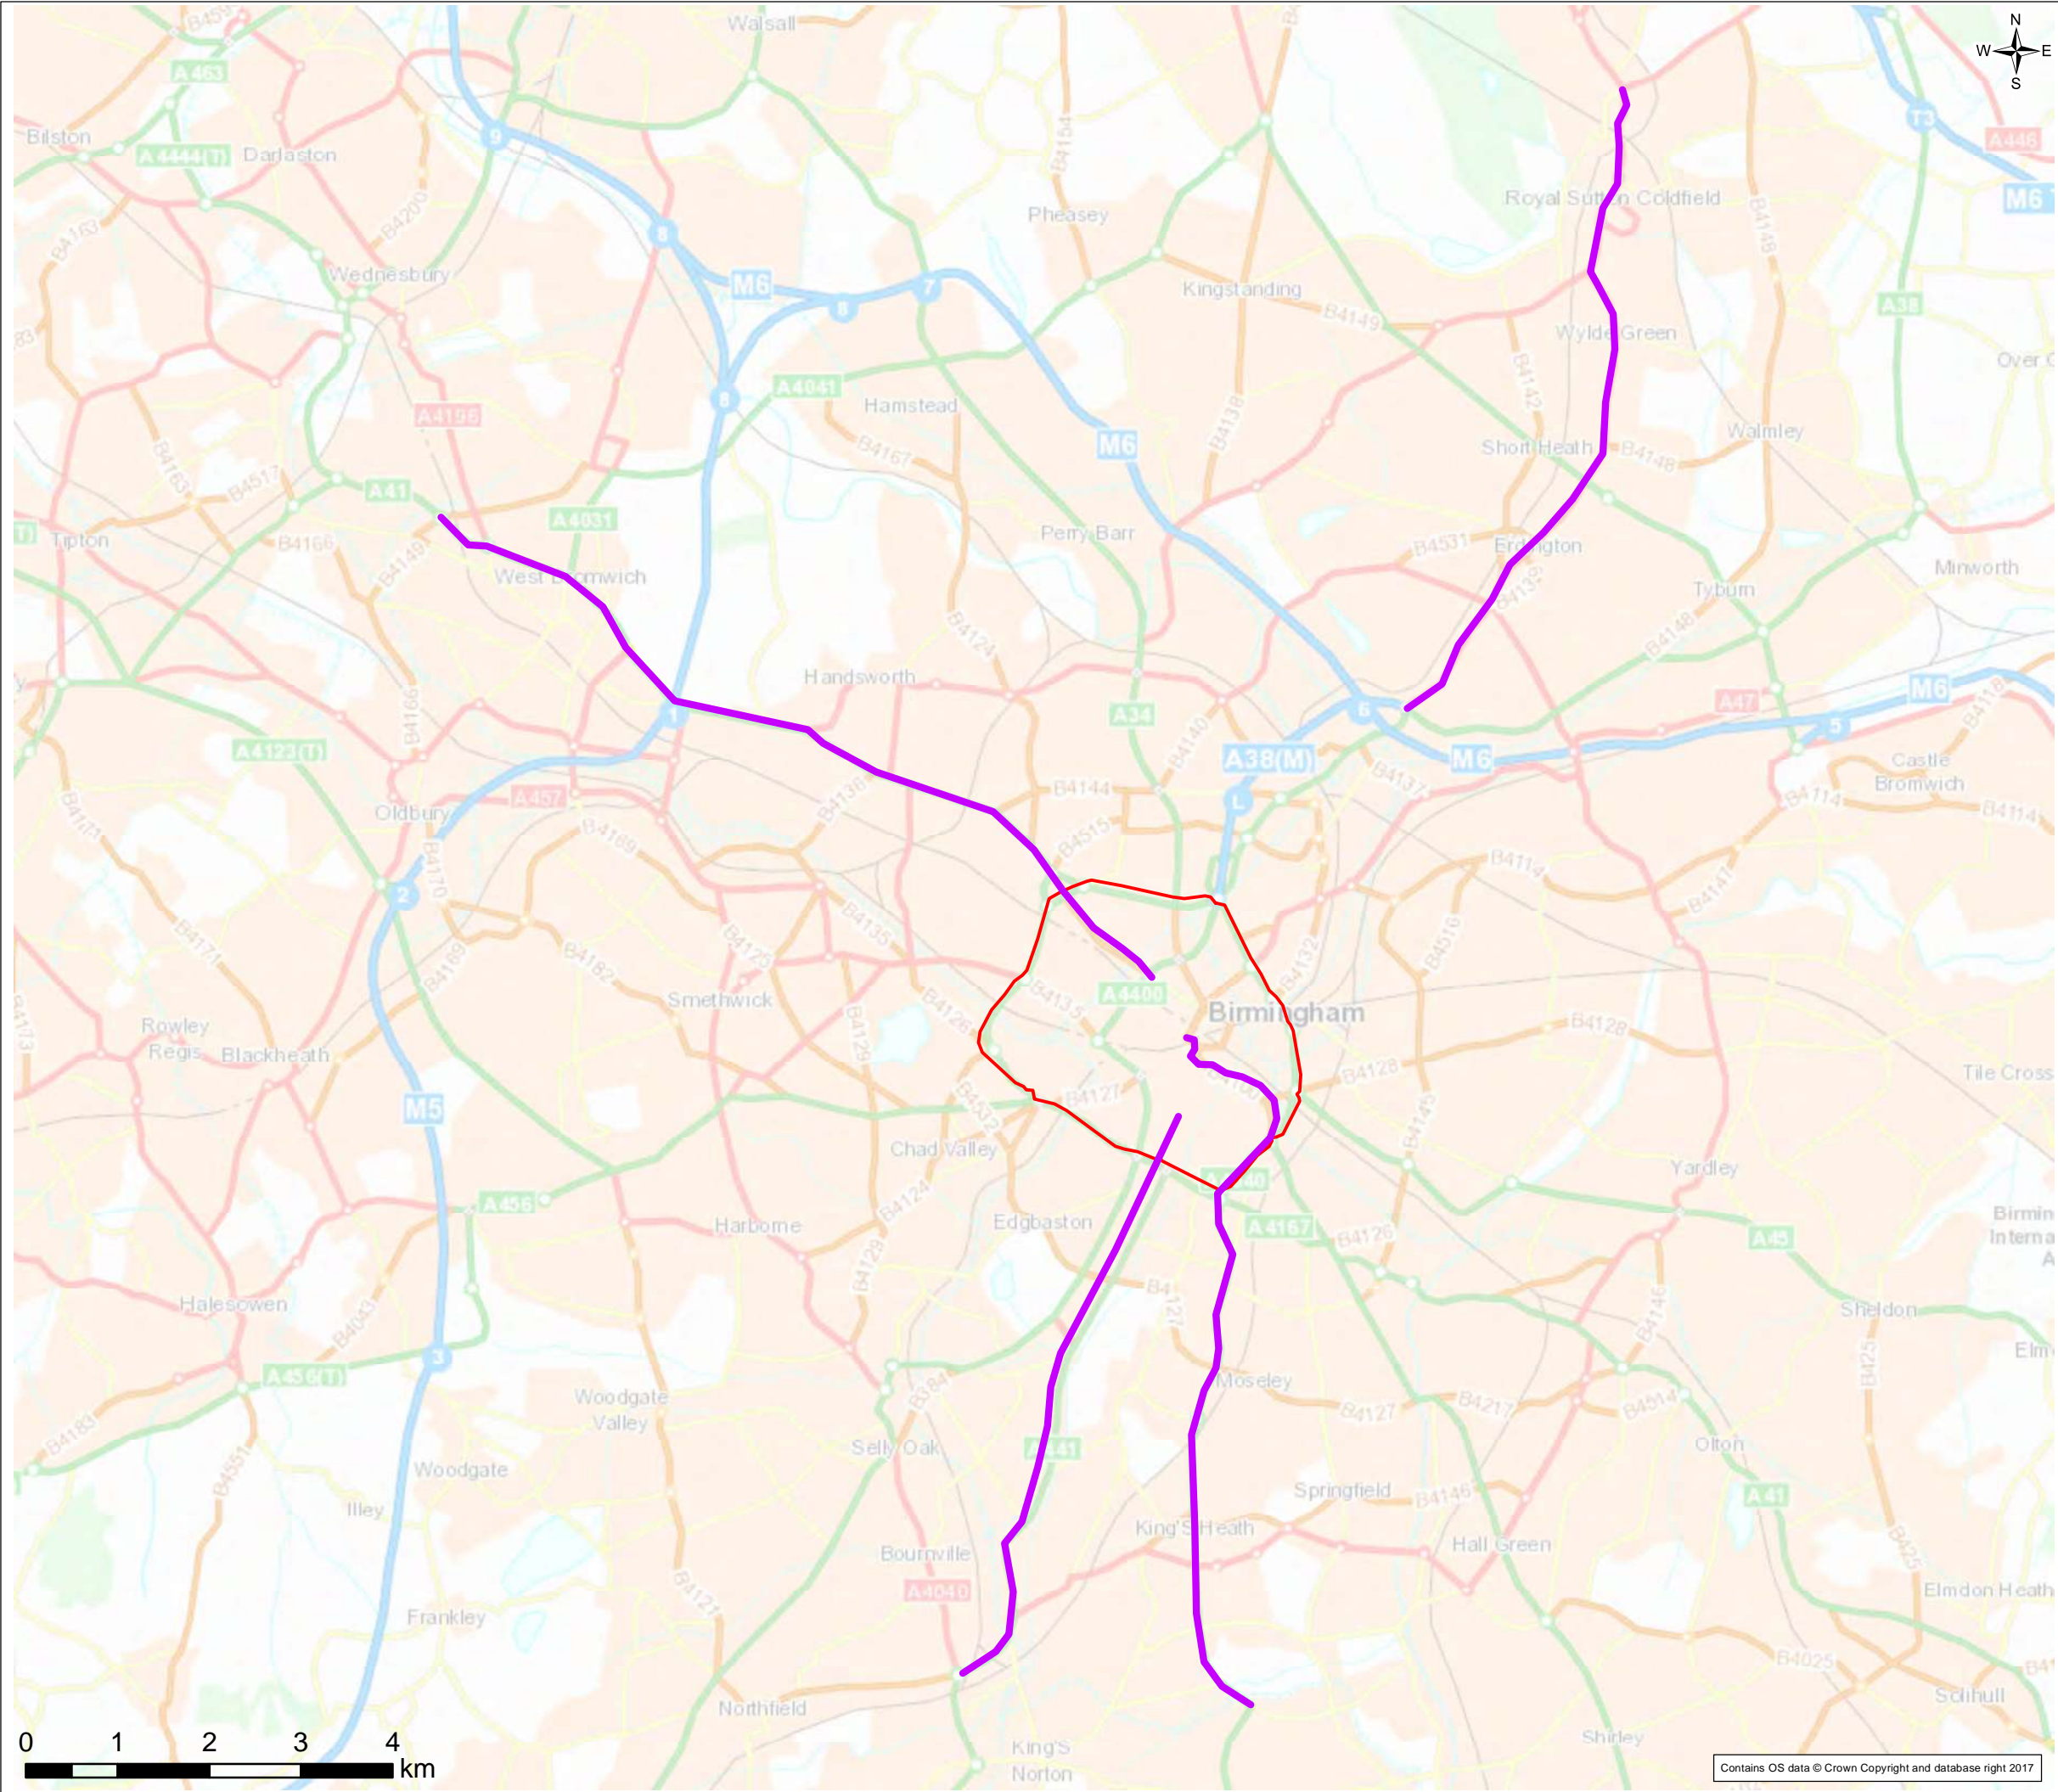


FIGURE 16

Legend

- Bus route
- Proposed CAZ boundary

0	01/06/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd
<div><p>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44 (0)121 237 4001 www.jacobs.com</p></div>						
Client <div></div>						
Project <div>BIRMINGHAM CLEAN AIR ZONE</div>						
Drawing Title <div>ADDITIONAL MEASURES: BUS ROUTES</div>						
Scale @ A3 <div>1:70,000</div> <div>DO NOT SCALE</div>						
Jacobs No. <div>B2309019</div>						
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

Contains OS data © Crown Copyright and database right 2017

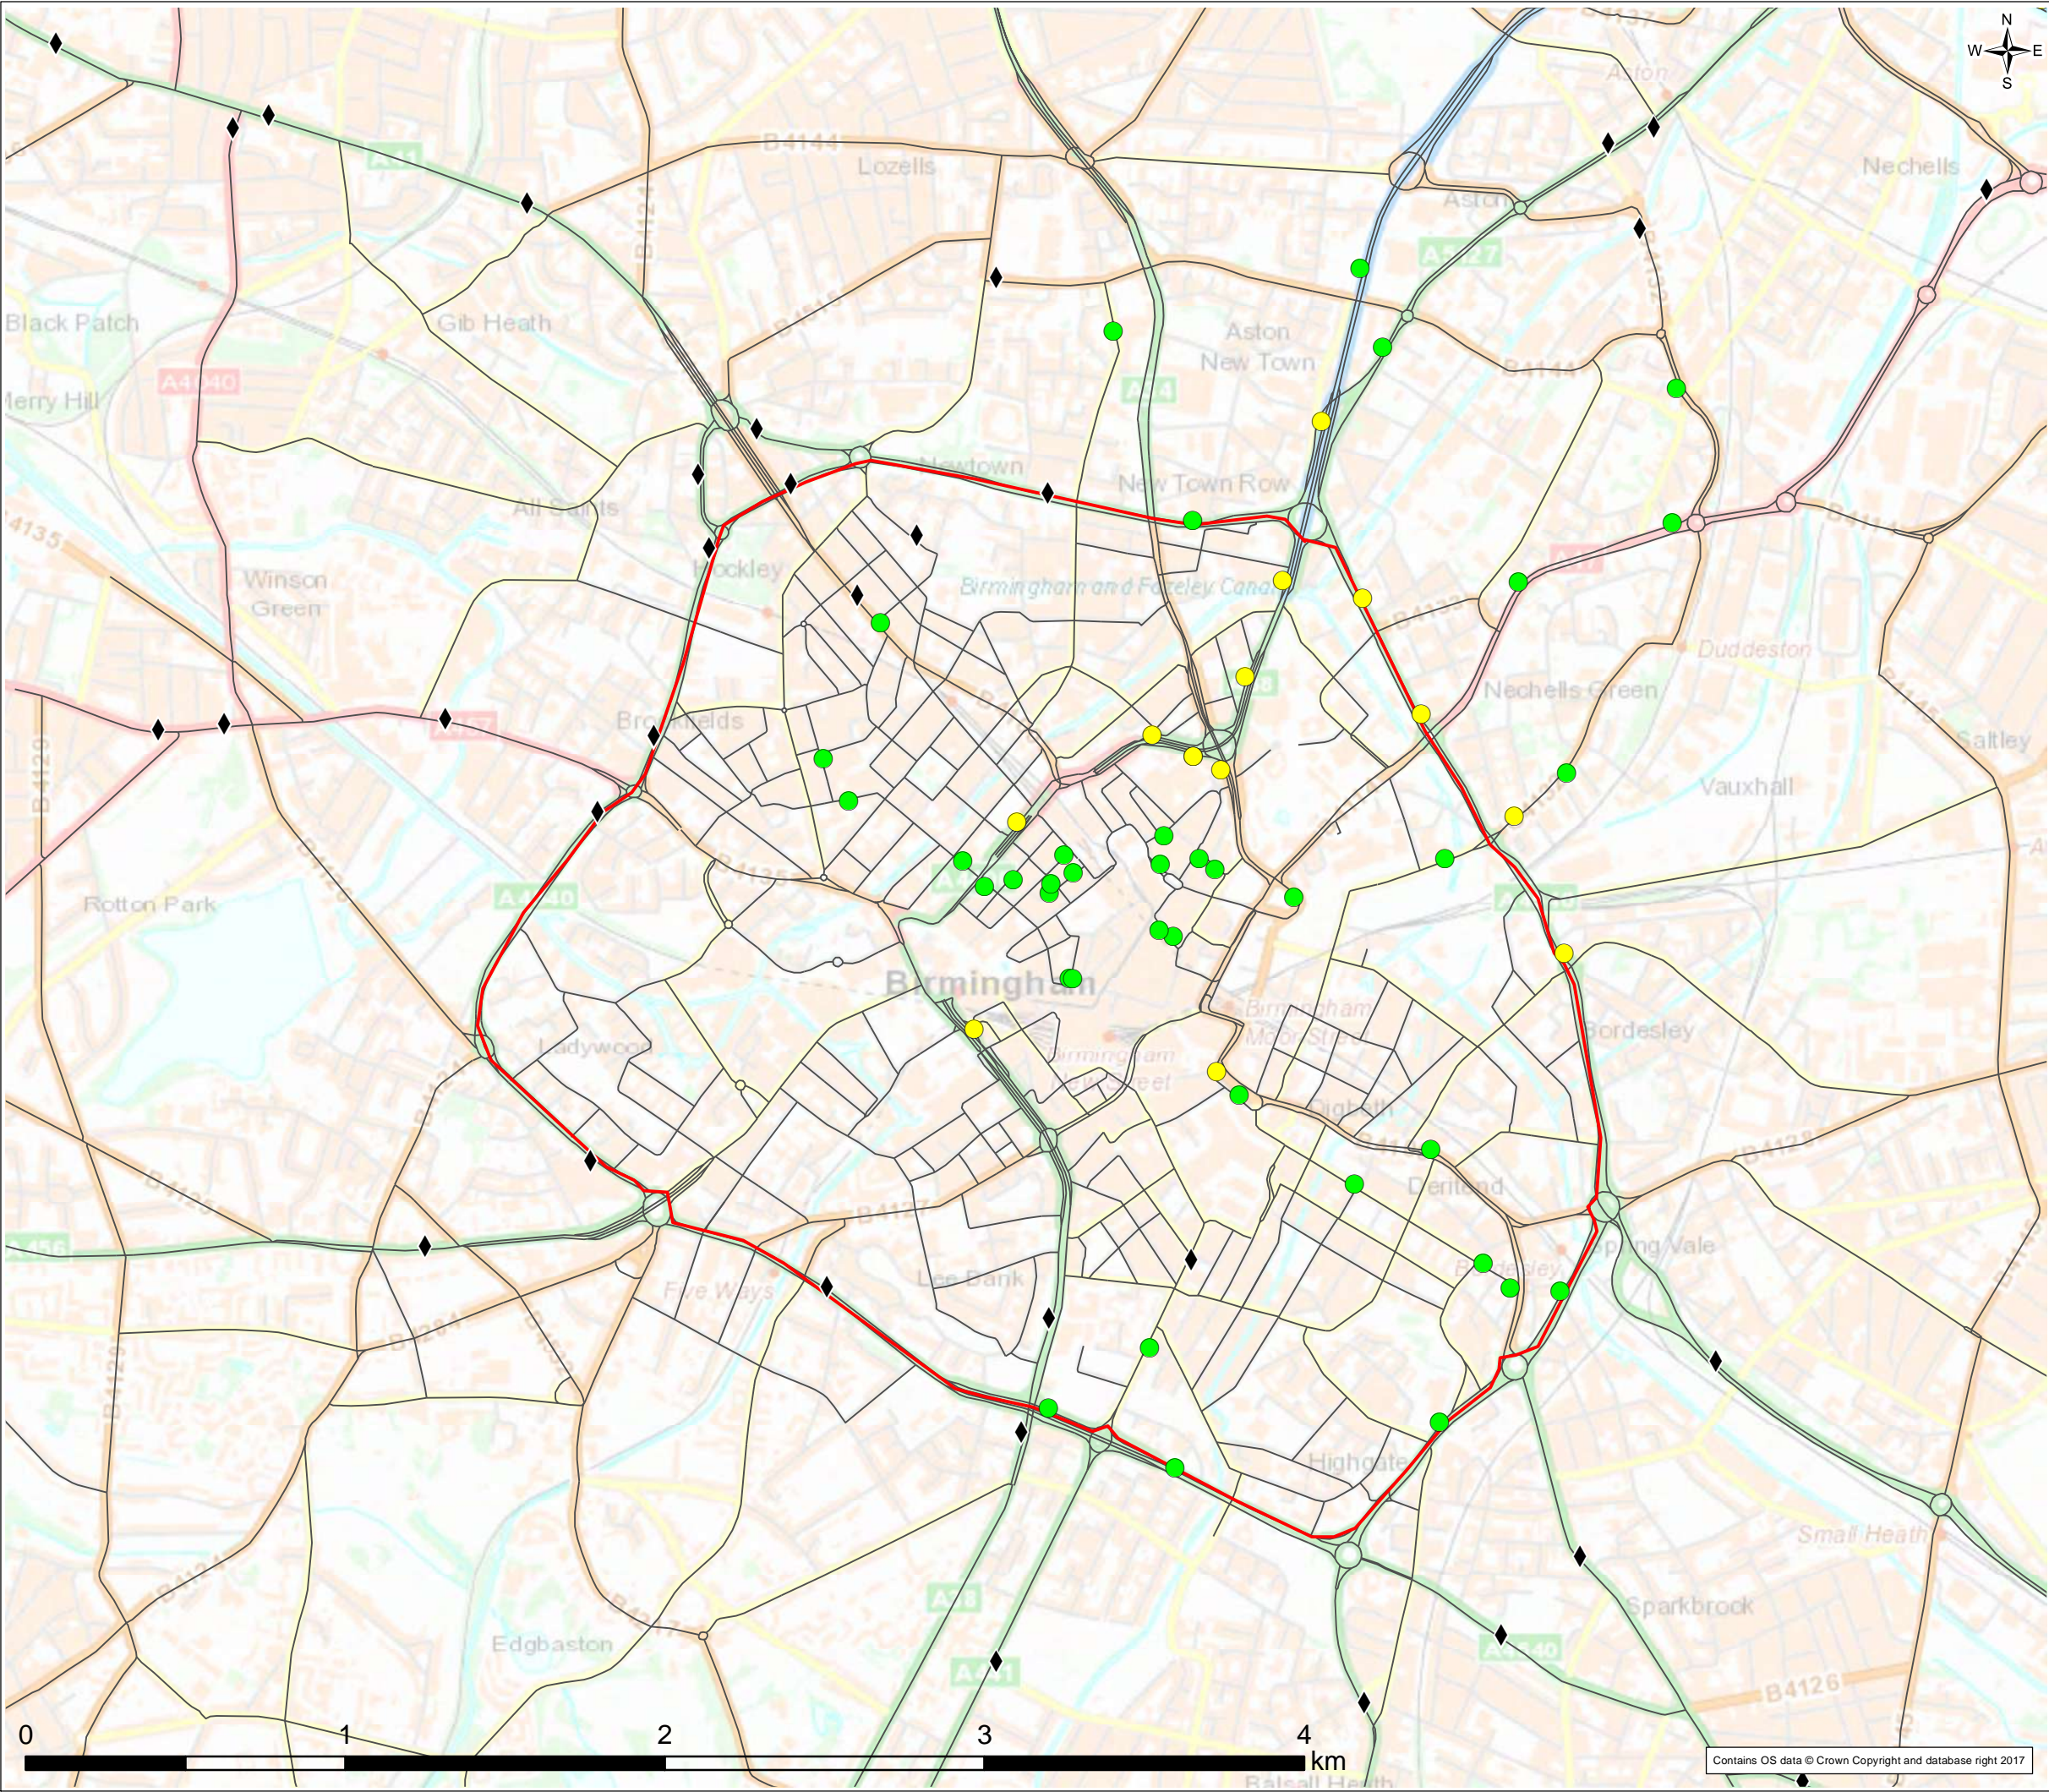


FIGURE 17

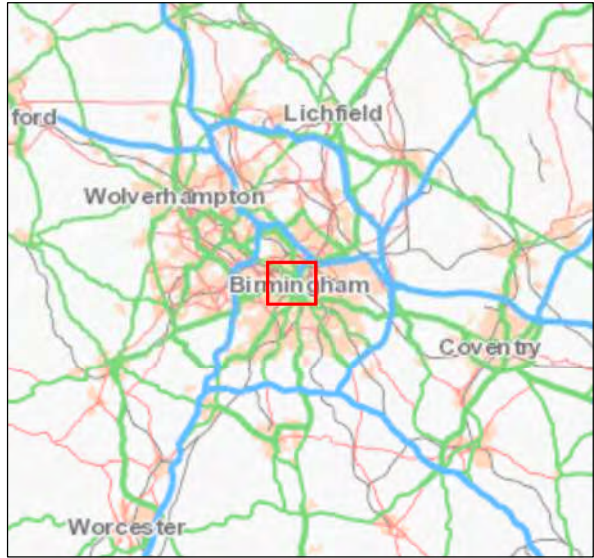
Legend

Modelled NO₂ Concentration (µg/m³)

- ◆ <35
- 35-40
- 40-45

— Proposed CAZ boundary

— Modelled Road Network




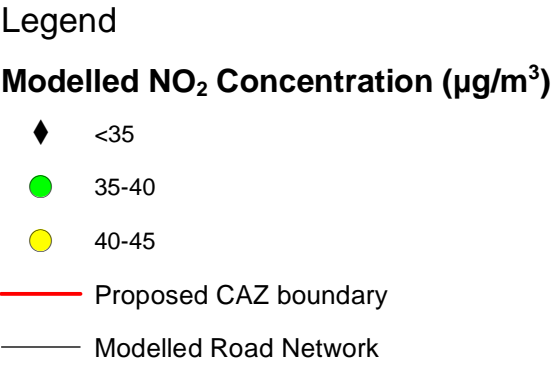



0	01/06/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd
<div><div>JACOBS®</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div></div>						
Client						
<div><div></div><div>Birmingham City Council</div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
ANNUAL MEAN NO ₂ CONCENTRATIONS - CAZ C HIGH PLUS ADDITIONAL MEASURES PACKAGE FOR OBC						
Scale @ A3		1:20,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

FIGURE 18



0	01/06/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	Appr'd
<div></div> <div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div>						
Client						
<div></div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
LOCATIONS OF KEY NO ₂ EXCEEDANCE AND SOURCE APPORTIONMENT WITH CAZ C HIGH PLUS ADDITIONAL MEASURES PACKAGE (2020)						
Scale @ A3		1:20,000			DO NOT SCALE	
Jacobs No.		B2309019				
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

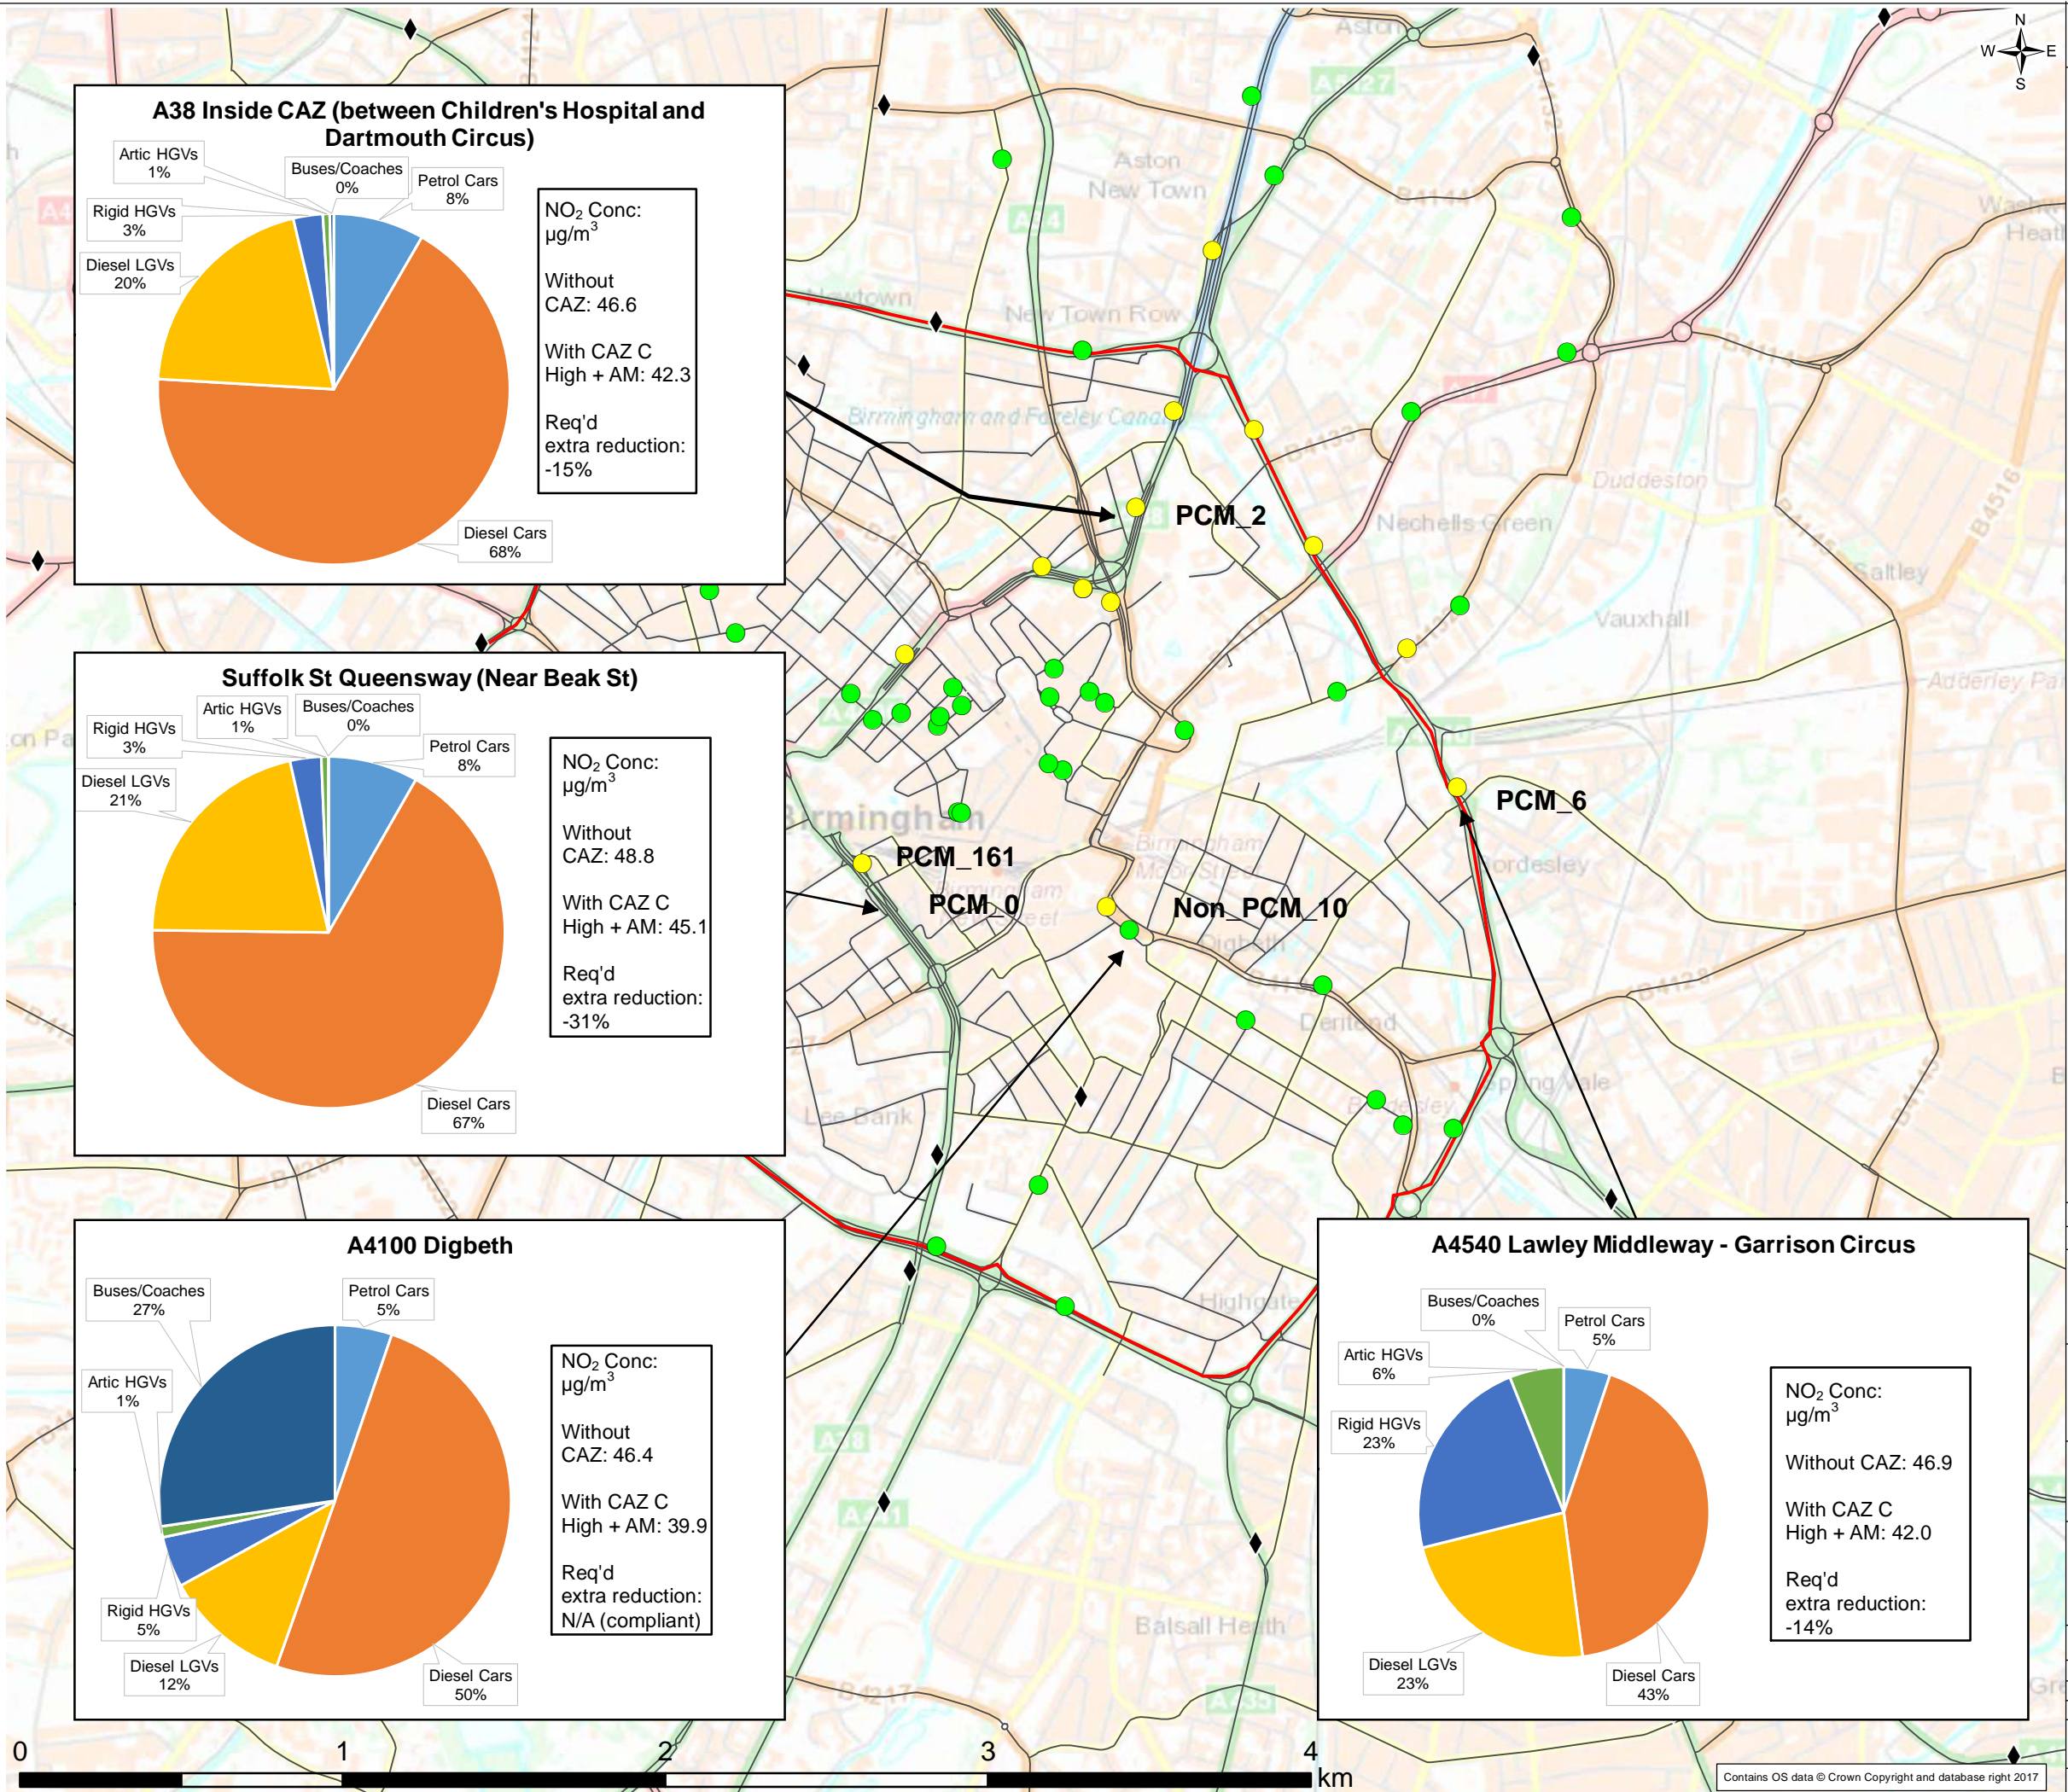

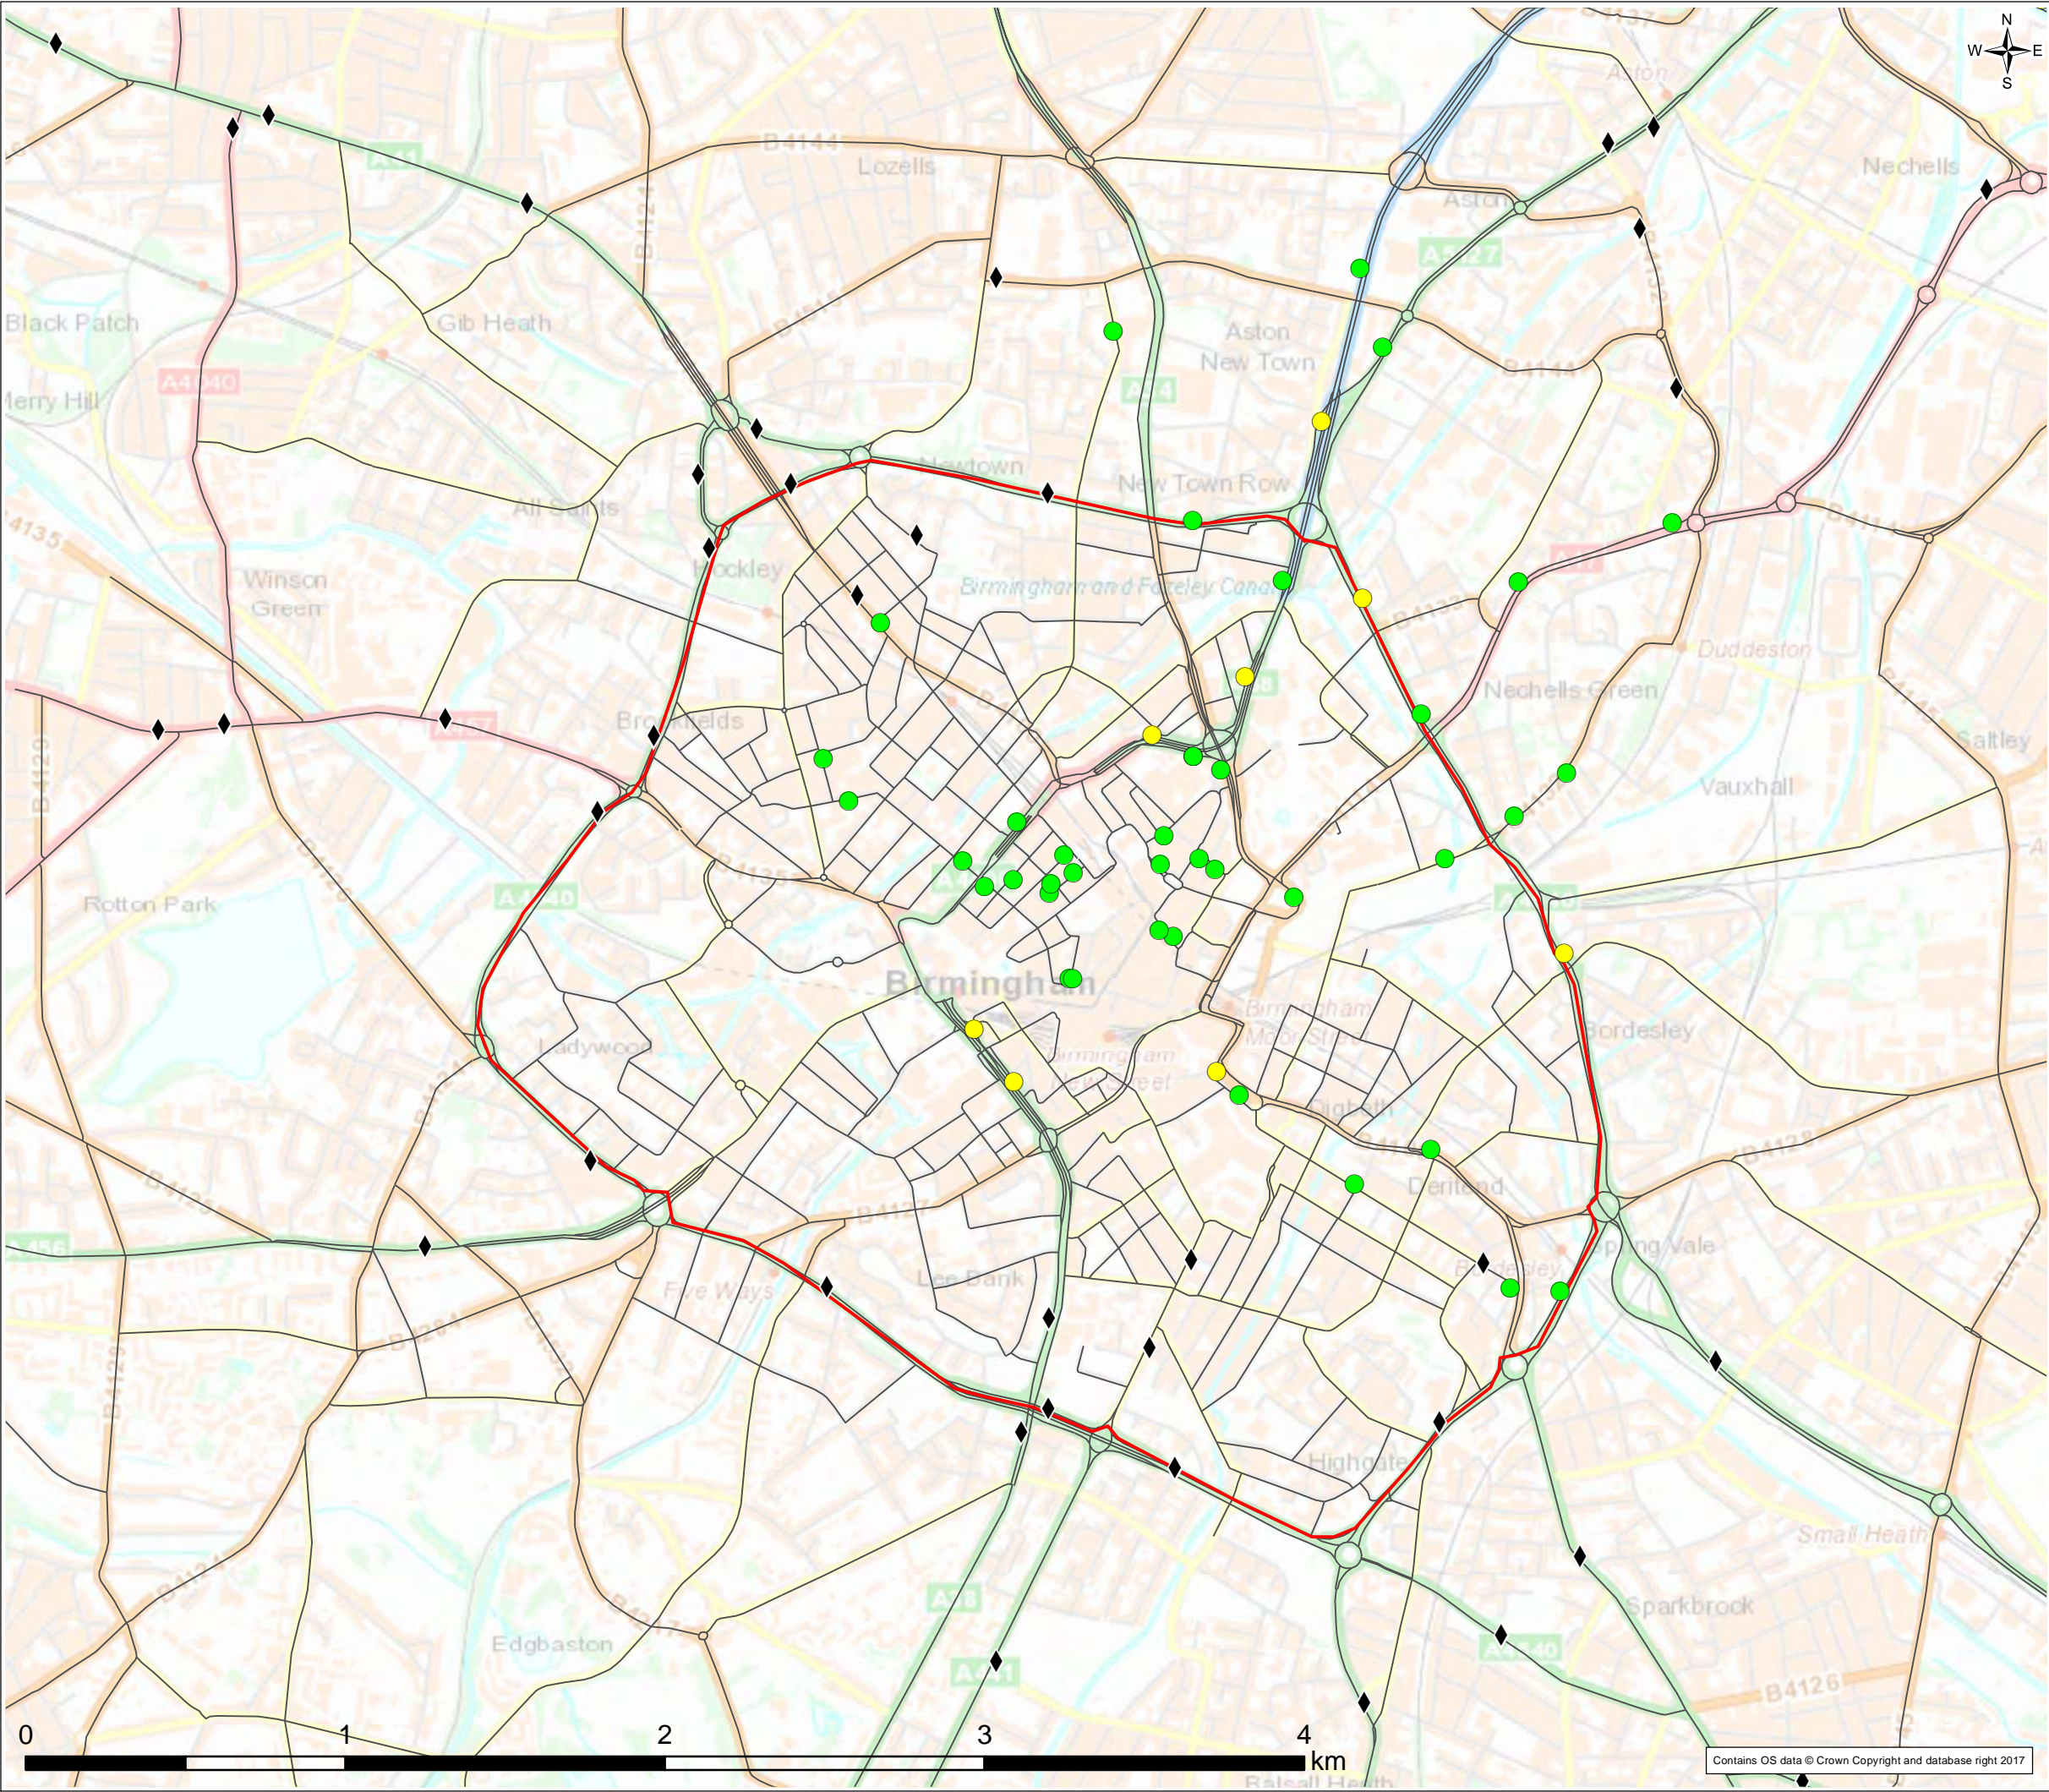


FIGURE 19

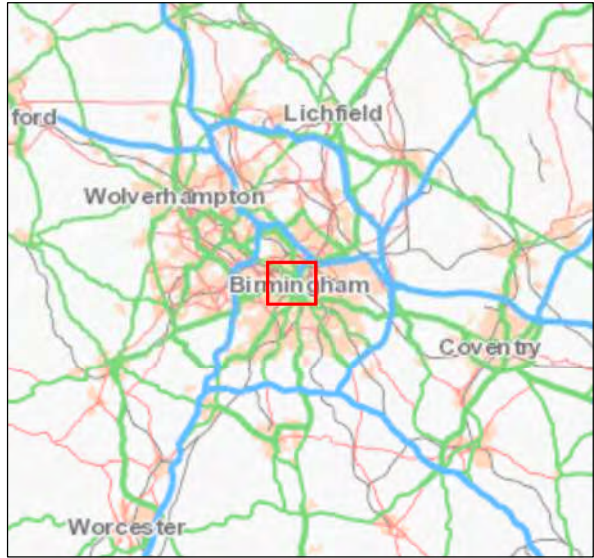
Legend

Modelled NO₂ Concentration (µg/m³)

- ◆ <35
- 35-40
- 40-45



— Proposed CAZ boundary


— Modelled Road Network




0	01/06/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd
<div><div>JACOBS</div><div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44 (0)121 237 4001 www.jacobs.com</div></div>						
Client <div><div>Birmingham City Council</div></div>						
Project <div>BIRMINGHAM CLEAN AIR ZONE</div>						
Drawing Title <div>ANNUAL MEAN NO₂ CONCENTRATIONS - CAZ D HIGH PLUS ADDITIONAL MEASURES PACKAGE FOR OBC</div>						
Scale @ A3 <div>1:20,000</div> <div>DO NOT SCALE</div>						
Jacobs No. <div>B2309019</div>						
Contains OS data © Crown Copyright and database right 2017						
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

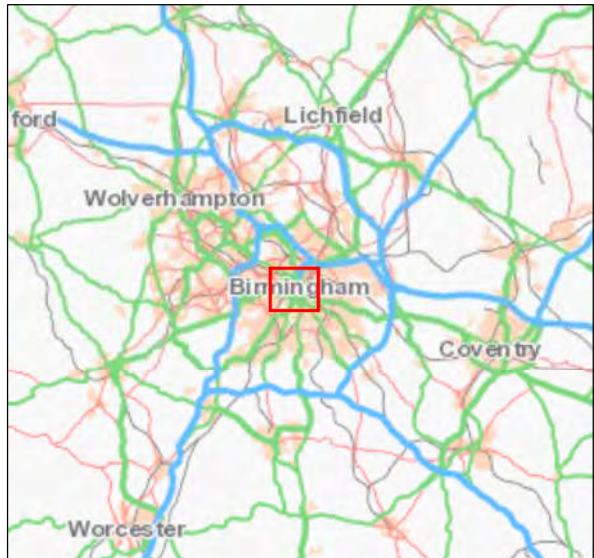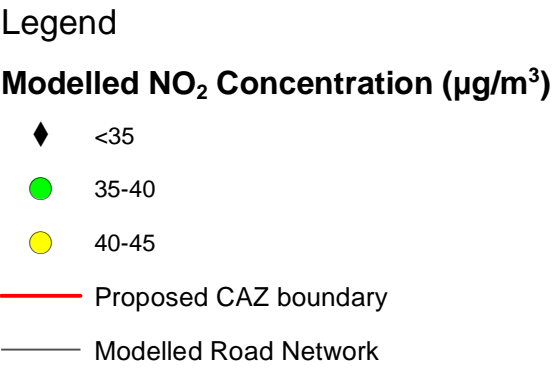FIGURE 20



0	08/06/2018	Initial Issue	GH	XXX	XXX	XXX
Rev.	Date	Purpose of revision	Drawn	Check'd	Rev'd	App'd
<div>JACOBS[®]</div> <div>7th Floor, 2 Colmore Square, 38 Colmore Circus, Queensway, Birmingham, B4 6BN Tel: +44 (0)121 237 4000 Fax: +44.(0)121.237.4001 www.jacobs.com</div>						
Client						
<div> Birmingham City Council</div>						
Project						
BIRMINGHAM CLEAN AIR ZONE						
Drawing Title						
LOCATIONS OF KEY NO ₂ EXCEEDANCE AND SOURCE APPORTIONMENT WITH CAZ D HIGH PLUS ADDITIONAL MEASURES PACKAGE (2020)						
Scale @ A3						
1:20,000			DO NOT SCALE			
Jacobs No.	B2309019					
This drawing is not to be used in whole in or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.						

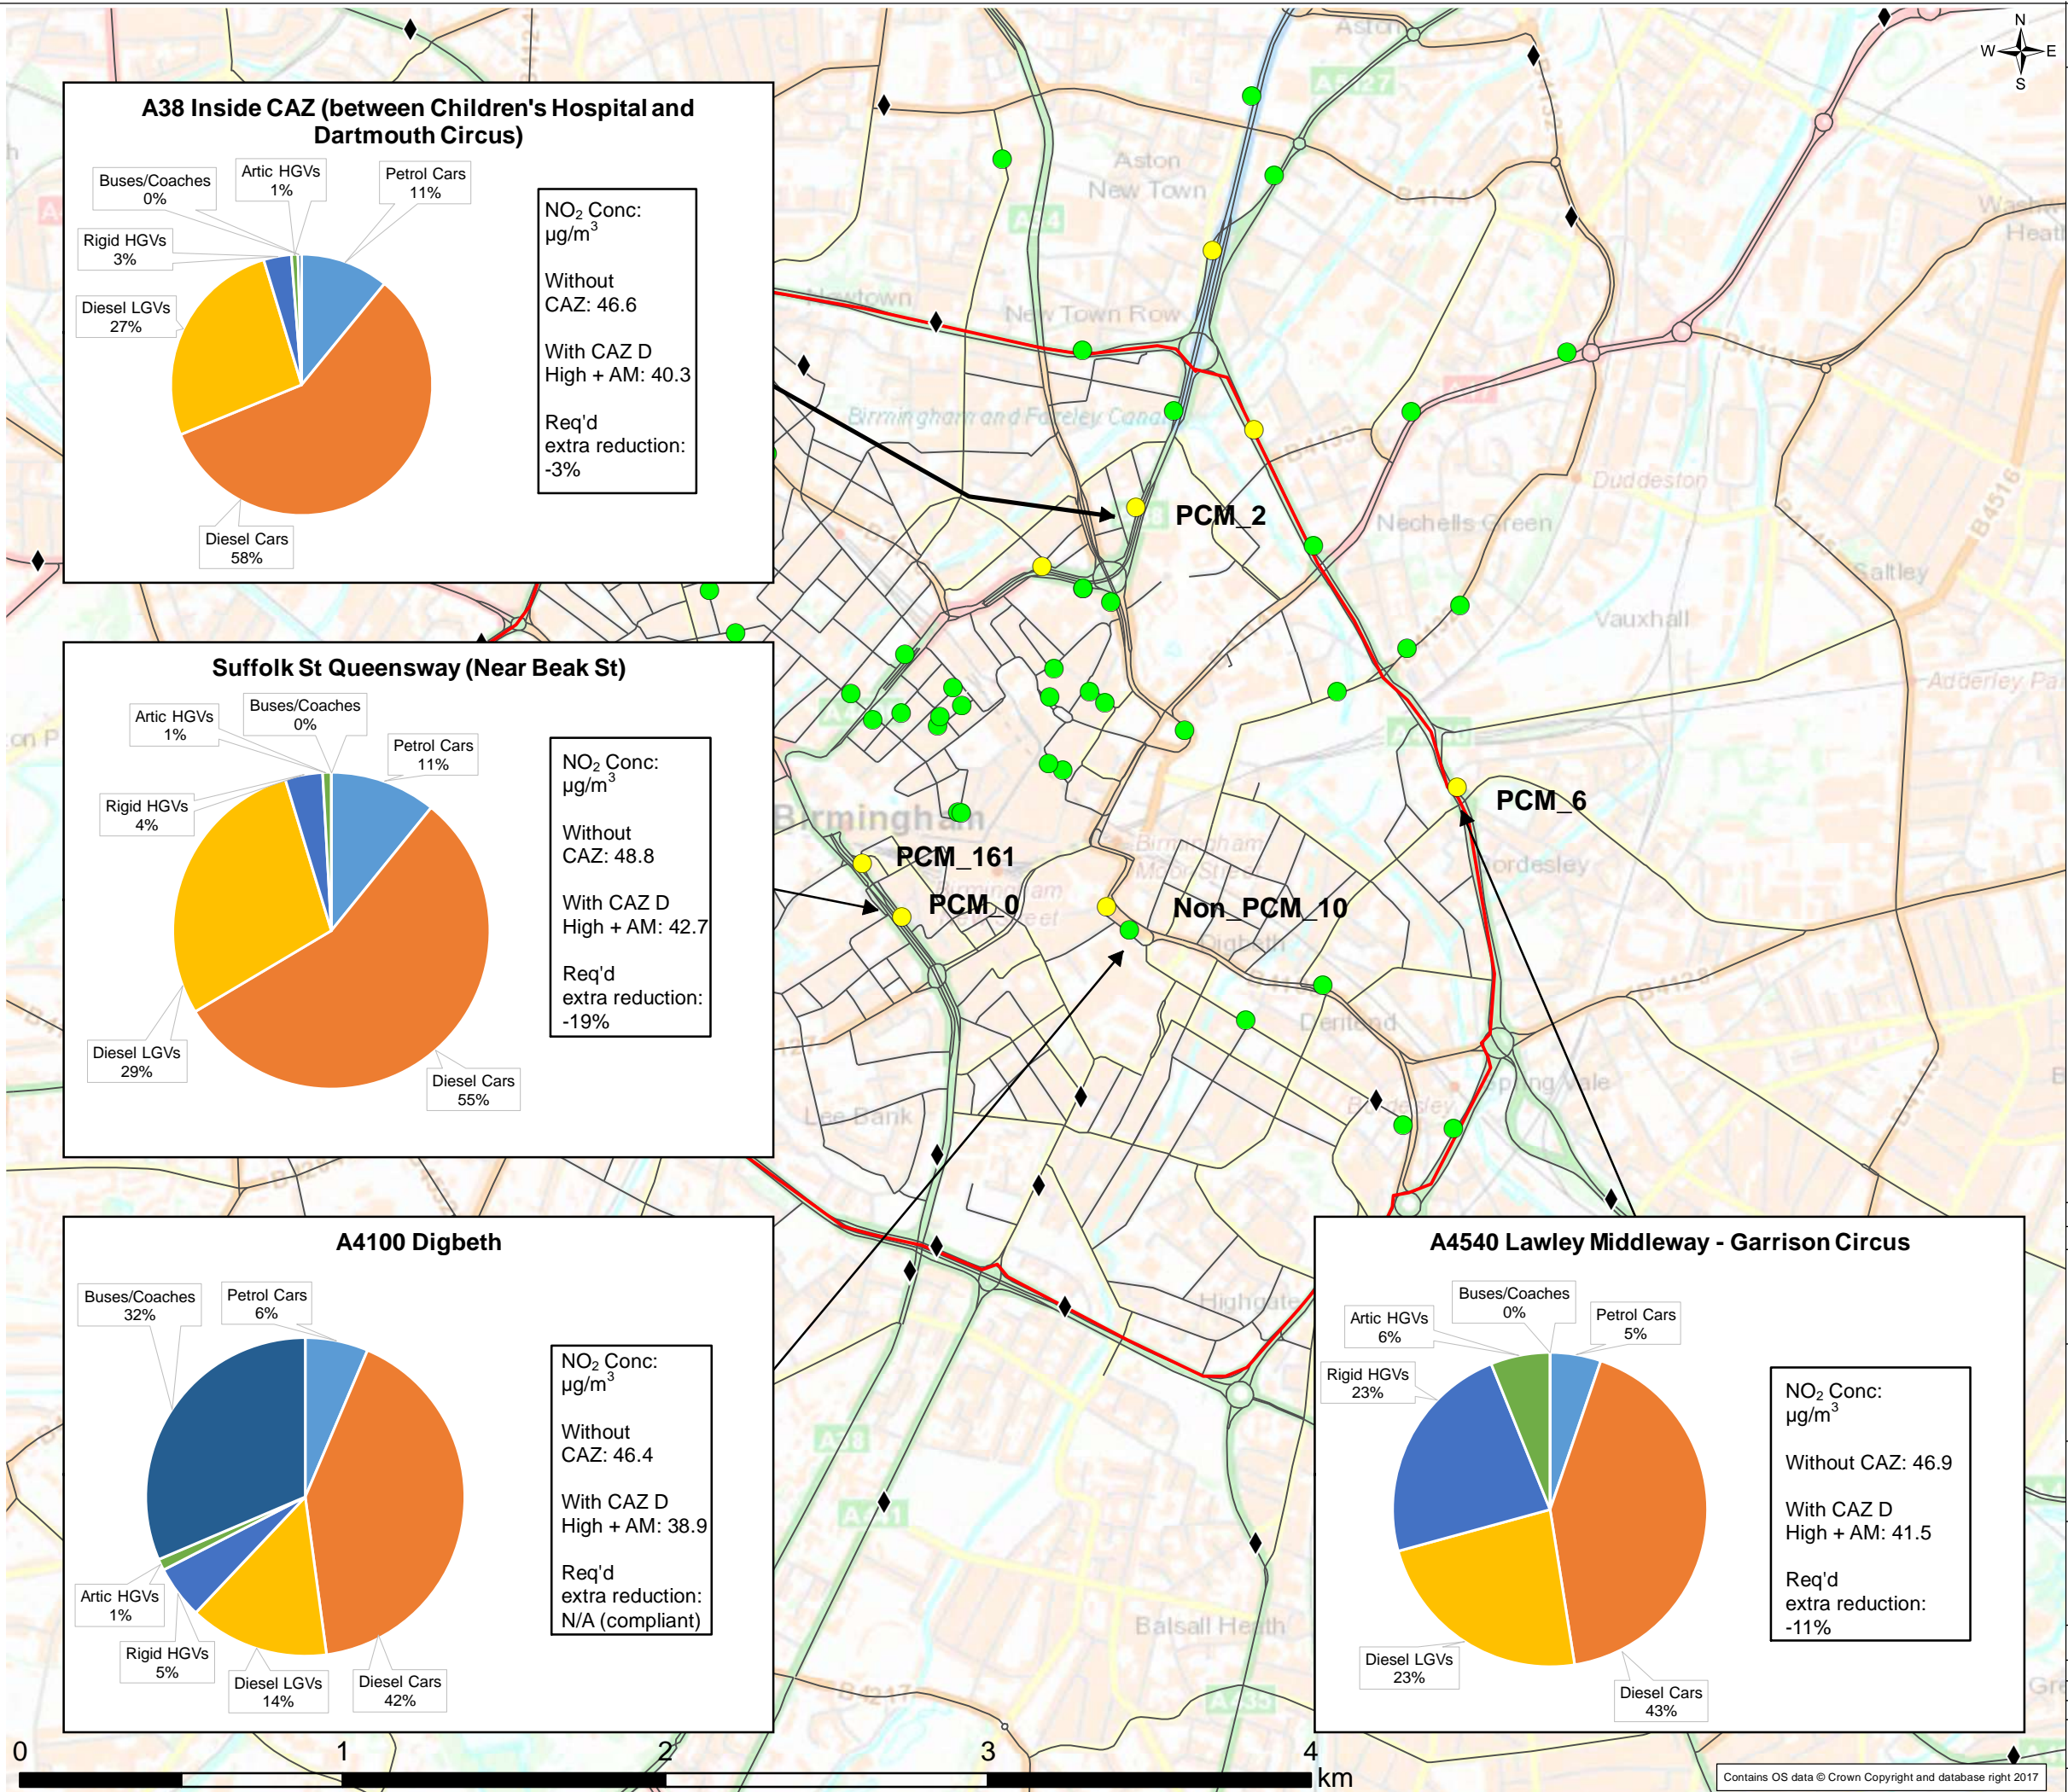

Appendix A. Explanation of Vehicle Emissions Standards

Background

The Euro standards are a range of successively tightening emissions controls founded in European directives that set limits for air quality pollutants from petrol, gas and diesel engines. Compliance with these limits must be demonstrated as part of the European type approval process for new vehicles and Road vehicle engines. There are also 'durability' requirements to demonstrate continued compliance in service.

Light duty vehicles (cars and vans) are subject to whole vehicle emissions testing, whereas engines for heavy duty vehicles (HGVs and buses) are emissions tested on a test bench, prior to installation in any vehicle. They may subsequently be fitted to a variety of different vehicle types.

The emissions limit values are different for each vehicle type, and to indicate which is being referred to, there is a convention that, for instance, Euro 6 refers to cars and vans (whole vehicle emissions testing), while Euro VI refers to goods vehicles and buses (engine only emissions testing). In each case, the Euro standards set out emissions limits for type approval testing that control four 'legislated' emissions – carbon monoxide (CO), hydrocarbons (HC), nitrogen oxides (NOx) and particulate matter (PM).

Standards

Euro 1 appeared in 1992 and the standards have progressed to the current Euro 6/VI. This became mandatory for all new heavy duty engines for goods vehicles and buses from January 2014, September 2015 for cars and light vans, and September 2016 for larger vans up to 3,500kg gross vehicle weight.

Euro standards for motorcycles, mopeds, tricycles and quadricycles (collectively known as L-Category vehicles) were introduced later than for larger vehicles, with the current standard being Euro 3. In 2017, Euro 4 for L-Category vehicles will come into force.

Detailed information about emissions standards for light duty vehicles can be found by following these selected links:

<https://www.dieselnet.com/standards/eu/ld.php> and for heavy vehicles at:

<https://www.dieselnet.com/standards/eu/hd.php>

The tables below set out the approximate implementation dates for each Euro standard, which differ according to vehicle type, between 1990 and 2020.

Table A1-1: Heavy vehicle Euro standards over time

	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Heavy vehicles (lorries, buses, coaches and other specialist vehicles)			I				II				III					IV			V					VI						
	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Age of Vehicle in 2020

I II III IV V VI
Euro Standard

Table A1-2: Light Duty Vehicle Euro Standards Over Time

		Year Euro Standard Introduced																													
		1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Large Vans (N1,2,3) and minibuses						1				2			3						4					5					6		
Cars and small vans (N1)				1					2				3					4					5					6			
L-Category vehicles (motorcycles, moped scooters and similar)												1				2						3							4		
		29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
		Age of Vehicle in 2020																													
		<div>123456</div> <div>Euro Standard</div>																													

Emissions

For NO_x emissions, light duty vehicles (e.g. cars and vans) use grams per kilometre (g/km) and heavy duty vehicles use grams per kilowatt hour (g/kwh) because of the different ways these vehicles are tested. In addition, heavy duty vehicles have both a 'steady state limit' and a 'transient limit'. These vehicles would need to comply with both limits to achieve CAZ compliance.

For certain vehicle types, some early Euro standards did not set limits for all pollutants. In this case 'n/a' is entered in the table below. This would mean that a vehicle is effectively compliant in terms of the CAZ for that pollutant. For example, Euro 4 petrol vehicles do not have PM limits, therefore vehicle owners only need to check that NO_x emissions meet the CAZ standard to know whether the vehicle is compliant.

The NO_x and PM limits for Euro 4 and Euro 6/VI vehicles are summarised in the tables below. The vehicle weights provided are the reference mass of the unladen vehicle at the time of type approval testing. In the tables, an LGV category N1 is a light goods vehicle not exceeding 3,500kg maximum mass. An N2 LGV is a light goods vehicle not exceeding 12,000kg maximum mass. A heavy duty vehicle is a goods vehicle, bus or coach with a maximum mass greater than 3,500kg.

Table A1-3: Euro 4 and 6 Emission Limits for Light Duty Vehicles (g/km)

Engine Class	Fuel	Vehicle Description & Weights	Emission Limits g/km	
			NO _x	PM
Euro 4	Petrol	Cars and LGVs Category n1 Class 1 ≤ 1,305kg	0.08	n/a
Euro 4	Petrol	LGV category N1 Class II 1,305-1,760 kg	0.10	n/a
Euro 4	Petrol	LGV category N1 Class III > 1,760kg	0.11	n/a
Euro 4	Petrol	LGV category N2	n/a	n/a
Euro 6	Diesel	cars and LGV category N1 Class 1 ≤ 1,305kg	0.08	0.005
Euro 6	Diesel	LGV category N1 Class II 1,305-1,760 kg	0.105	0.005
Euro 6	Diesel	LGV category N1 Class III > 1,760kg	0.125	0.005
Euro 6	Diesel	LGV category N2	0.125	0.005

Table A1-4: Euro VI Emission Limits for Heavy Duty Vehicles (g/kwh)

Engine Class	Steady State Emission Limits g/km		Transient Emission Limits g/km	
	NO _x	PM	NO _x	PM
Euro VI	0.4	0.01	0.46	0.01

On-highway verification

It has been identified that emissions from vehicles, especially diesel cars and LGVs can be much greater under actual driving conditions than the emissions standards based on laboratory testing,

For the latest Euro 6/VI emissions standards, the laboratory-based type approval tests, using the limit values set out above, are verified by on-highway emissions testing of a completed vehicle. This has been the case since 2013 for heavy duty engines where the not-to-exceed limits in the on-highway test have ensured that vehicle exhaust emissions of NO_x and PM are greatly reduced compared to earlier standards. In many cases the emissions from a heavy truck or bus are comparable with those of passenger cars.

For light duty cars and vans, the Euro 6 on-highway verification is in the form of a test protocol known as Real Driving Emissions (RDE). These verification measures are being introduced in a number of stages, which have been loosely termed 'Euro 6a to Euro 6d' as follows:

- 2014 Euro 6a new reduced emissions limits
- 2017 Euro 6b new Worldwide Harmonised Light Vehicle Test Cycle (WLTC) implemented
- 2019 Euro 6c conformity factor of 2.1 to be applied to on-highway RDE test results
- 2021 Euro 6d on-highway RDE conformity factor to be reduced to 1.5

At the time of writing, the final details of these measures were still to be confirmed by a vote at the Technical Committee – Motor Vehicles (TCMV) at the European Parliament. It is expected that these measures will be confirmed.

For cars and LGVs, Euro 6a essentially consisted of a reduction in the allowable NO_x emissions from diesel engines of 55 per cent. Emissions of PM and all emissions limits from petrol engines are unchanged from Euro 5.

Euro 6b was the replacement of the New European Driving Cycle (NEDC), widely acknowledged as being unrepresentative, with the WLTC, which is far more transient and representative of real driving conditions.

Euro 6c will introduce RDE testing as a verification of laboratory emissions tests. A test route conforming to detailed criteria is driven with portable emissions measurement equipment on the vehicle. The average measured emissions must not be more than 110 per cent over the laboratory test limits (conformity factor of 2.1).

Euro 6d will see the conformity factor reduced to 1.5 (50 per cent over the laboratory test limits). This factor allows for variance between portable and laboratory emissions analysers.

Appendix B. Local Fleet Mix Profiles

2016

This sheet is only used if you wish to provide:

Section 1	User Defined Euro Fleet Composition Information	Click to go to Section 2	POPULATE WITH DEFAULTS for chosen Year and Area
Section 2	User Defined Vehicle Size Distributions		

Year: 2016
Area: England (not London)

Defined in the Input Data Sheet
Defined in the Input Data Sheet

Traffic Flow Data must be entered in the Input Data Sheet.

Please Use Check Boxes next to each coverage box to ensure your totals all equal 1. Information for All pollutants must be entered.

Section 1: Euro Proportions

Default (with London) Fleet Euro Proportions for Year and Area are provided below

Enter your (with box) Euro Proportions below

Check Euro Proportions = 1 or 0

Vehicle Type	Default Euro Proportions (2016 - England (not London))	User Euro Proportions (2016 - England (not London))	Check
 petrol car			
Upr-Euro 1	0.00	0.00	
Upr-Euro 2	0.01	0.01	
Upr-Euro 3	0.10	0.10	
Upr-Euro 4	0.29	0.32	
Upr-Euro 5	0.56	0.57	
Upr-Euro 6	0.03	0.03	OK
 diesel car			
Upr-Euro 1	0.00	0.00	
Upr-Euro 2	0.00	0.00	
Upr-Euro 3	0.00	0.00	
Upr-Euro 4	0.00	0.00	
Upr-Euro 5	0.43	0.43	
Upr-Euro 6	0.56	0.56	OK
 petrol LGV			
Upr-Euro 1	0.00	0.00	
Upr-Euro 2	0.04	0.04	
Upr-Euro 3	0.16	0.16	
Upr-Euro 4	0.24	0.24	
Upr-Euro 5	0.43	0.43	
Upr-Euro 6	0.13	0.04	OK
 diesel LGV			
Upr-Euro 1	0.00	0.00	
Upr-Euro 2	0.00	0.00	
Upr-Euro 3	0.00	0.00	
Upr-Euro 4	0.24	0.24	
Upr-Euro 5	0.53	0.42	
Upr-Euro 6	0.15	0.11	OK
 petrol HGV			
Upr-Euro 1	0.00	0.00	
Upr-Euro 2	0.00	0.00	
Upr-Euro 3	0.00	0.00	
Upr-Euro 4	0.10	0.10	
Upr-Euro 5	0.08	0.08	
Upr-Euro 6	0.23	0.23	
Upr-Euro 7	0.40	0.40	
Upr-Euro 8	0.00	0.00	
Upr-Euro 9	0.00	0.00	
Upr-Euro 10	0.00	0.00	
Upr-Euro 11	0.00	0.00	
Upr-Euro 12	0.00	0.00	
Upr-Euro 13	0.00	0.00	
Upr-Euro 14	0.00	0.00	
Upr-Euro 15	0.00	0.00	
Upr-Euro 16	0.00	0.00	
Upr-Euro 17	0.00	0.00	
Upr-Euro 18	0.00	0.00	
Upr-Euro 19	0.00	0.00	
Upr-Euro 20	0.00	0.00	
Upr-Euro 21	0.00	0.00	
Upr-Euro 22	0.00	0.00	
Upr-Euro 23	0.00	0.00	
Upr-Euro 24	0.00	0.00	
Upr-Euro 25	0.00	0.00	
Upr-Euro 26	0.00	0.00	
Upr-Euro 27	0.00	0.00	
Upr-Euro 28	0.00	0.00	
Upr-Euro 29	0.00	0.00	
Upr-Euro 30	0.00	0.00	
Upr-Euro 31	0.00	0.00	
Upr-Euro 32	0.00	0.00	
Upr-Euro 33	0.00	0.00	
Upr-Euro 34	0.00	0.00	
Upr-Euro 35	0.00	0.00	
Upr-Euro 36	0.00	0.00	
Upr-Euro 37	0.00	0.00	
Upr-Euro 38	0.00	0.00	
Upr-Euro 39	0.00	0.00	
Upr-Euro 40	0.00	0.00	
Upr-Euro 41	0.00	0.00	
Upr-Euro 42	0.00	0.00	
Upr-Euro 43	0.00	0.00	
Upr-Euro 44	0.00	0.00	
Upr-Euro 45	0.00	0.00	
Upr-Euro 46	0.00	0.00	
Upr-Euro 47	0.00	0.00	
Upr-Euro 48	0.00	0.00	
Upr-Euro 49	0.00	0.00	
Upr-Euro 50	0.00	0.00	
Upr-Euro 51	0.00	0.00	
Upr-Euro 52	0.00	0.00	
Upr-Euro 53	0.00	0.00	
Upr-Euro 54	0.00	0.00	
Upr-Euro 55	0.00	0.00	
Upr-Euro 56	0.00	0.00	
Upr-Euro 57	0.00	0.00	
Upr-Euro 58	0.00	0.00	
Upr-Euro 59	0.00	0.00	
Upr-Euro 60	0.00	0.00	
Upr-Euro 61	0.00	0.00	
Upr-Euro 62	0.00	0.00	
Upr-Euro 63	0.00	0.00	
Upr-Euro 64	0.00	0.00	
Upr-Euro 65	0.00	0.00	
Upr-Euro 66	0.00	0.00	
Upr-Euro 67	0.00	0.00	
Upr-Euro 68	0.00	0.00	
Upr-Euro 69	0.00	0.00	
Upr-Euro 70	0.00	0.00	
Upr-Euro 71	0.00	0.00	
Upr-Euro 72	0.00	0.00	
Upr-Euro 73	0.00	0.00	
Upr-Euro 74	0.00	0.00	
Upr-Euro 75	0.00	0.00	
Upr-Euro 76	0.00	0.00	
Upr-Euro 77	0.00	0.00	
Upr-Euro 78	0.00	0.00	
Upr-Euro 79	0.00	0.00	
Upr-Euro 80	0.00	0.00	
Upr-Euro 81	0.00	0.00	
Upr-Euro 82	0.00	0.00	
Upr-Euro 83	0.00	0.00	
Upr-Euro 84	0.00	0.00	
Upr-Euro 85	0.00	0.00	
Upr-Euro 86	0.00	0.00	
Upr-Euro 87	0.00	0.00	
Upr-Euro 88	0.00	0.00	
Upr-Euro 89	0.00	0.00	
Upr-Euro 90	0.00	0.00	
Upr-Euro 91	0.00	0.00	
Upr-Euro 92	0.00	0.00	
Upr-Euro 93	0.00	0.00	
Upr-Euro 94	0.00	0.00	
Upr-Euro 95	0.00	0.00	
Upr-Euro 96	0.00	0.00	
Upr-Euro 97	0.00	0.00	
Upr-Euro 98	0.00	0.00	
Upr-Euro 99	0.00	0.00	
Upr-Euro 100	0.00	0.00	
Upr-Euro 101	0.00	0.00	
Upr-Euro 102	0.00	0.00	
Upr-Euro 103	0.00	0.00	
Upr-Euro 104	0.00	0.00	
Upr-Euro 105	0.00	0.00	
Upr-Euro 106	0.00	0.00	
Upr-Euro 107	0.00	0.00	
Upr-Euro 108	0.00	0.00	
Upr-Euro 109	0.00	0.00	
Upr-Euro 110	0.00	0.00	
Upr-Euro 111	0.00	0.00	
Upr-Euro 112	0.00	0.00	
Upr-Euro 113	0.00	0.00	
Upr-Euro 114	0.00	0.00	
Upr-Euro 115	0.00	0.00	
Upr-Euro 116	0.00	0.00	
Upr-Euro 117	0.00	0.00	
Upr-Euro 118	0.00	0.00	
Upr-Euro 119	0.00	0.00	
Upr-Euro 120	0.00	0.00	
Upr-Euro 121	0.00	0.00	
Upr-Euro 122	0.00	0.00	
Upr-Euro 123	0.00	0.00	
Upr-Euro 124	0.00	0.00	
Upr-Euro 125	0.00	0.00	
Upr-Euro 126	0.00	0.00	
Upr-Euro 127	0.00	0.00	
Upr-Euro 128	0.00	0.00	
Upr-Euro 129	0.00	0.00	
Upr-Euro 130	0.00	0.00	
Upr-Euro 131	0.00	0.00	
Upr-Euro 132	0.00	0.00	
Upr-Euro 133	0.00	0.00	
Upr-Euro 134	0.00	0.00	
Upr-Euro 135	0.00	0.00	
Upr-Euro 136	0.00	0.00	
Upr-Euro 137	0.00	0.00	
Upr-Euro 138	0.00	0.00	
Upr-Euro 139	0.00	0.00	
Upr-Euro 140	0.00	0.00	
Upr-Euro 141	0.00	0.00	
Upr-Euro 142	0.00	0.00	
Upr-Euro 143	0.00	0.00	
Upr-Euro 144	0.00	0.00	
Upr-Euro 145	0.00	0.00	
Upr-Euro 146	0.00	0.00	
Upr-Euro 147	0.00	0.00	
Upr-Euro 148	0.00	0.00	
Upr-Euro 149	0.00	0.00	
Upr-Euro 150	0.00	0.00	
Upr-Euro 151	0.00	0.00	
Upr-Euro 152	0.00	0.00	
Upr-Euro 153	0.00	0.00	
Upr-Euro 154	0.00	0.00	
Upr-Euro 155	0.00	0.00	
Upr-Euro 156	0.00	0.00	
Upr-Euro 157	0.00	0.00	
Upr-Euro 158	0.00	0.00	
Upr-Euro 159	0.00	0.00	
Upr-Euro 160	0.00	0.00	
Upr-Euro 161	0.00	0.00	
Upr-Euro 162	0.00	0.00	
Upr-Euro 163	0.00	0.00	
Upr-Euro 164	0.00	0.00	
Upr-Euro 165	0.00	0.00	
Upr-Euro 166	0.00	0.00	
Upr-Euro 167	0.00	0.00	
Upr-Euro 168	0.00	0.00	
Upr-Euro 169	0.00	0.00	
Upr-Euro 170	0.00	0.00	
Upr-Euro 171	0.00	0.00	
Upr-Euro 172	0.00	0.00	
Upr-Euro 173	0.00	0.00	
Upr-Euro 174	0.00	0.00	
Upr-Euro 175	0.00	0.00	
Upr-Euro 176	0.00	0.00	
Upr-Euro 177	0.00	0.00	
Upr-Euro 178	0.00	0.00	
Upr-Euro 179	0.00	0.00	
Upr-Euro 180	0.00	0.00	
Upr-Euro 181	0.00	0.00	
Upr-Euro 182	0.00	0.00	
Upr-Euro 183	0.00	0.00	
Upr-Euro 184	0.00	0.00	
Upr-Euro 185	0.00	0.00	
Upr-Euro 186	0.00	0.00	
Upr-Euro 187	0.00	0.00	
Upr-Euro 188	0.00	0.00	
Upr-Euro 189	0.00	0.00	
Upr-Euro 190	0.00	0.00	
Upr-Euro 191	0.00	0.00	
Upr-Euro 192	0.00	0.00	
Upr-Euro 193	0.00	0.00	
Upr-Euro 194	0.00	0.00	
Upr-Euro 195	0.00	0.00	
Upr-Euro 196	0.00	0.00	
Upr-Euro 197	0.00	0.00	
Upr-Euro 198	0.00	0.00	
Upr-Euro 199	0.00	0.00	
Upr-Euro 200	0.00	0.00	
Upr-Euro 201	0.00	0.00	
Upr-Euro 202	0.00	0.00	
Upr-Euro 203	0.00	0.00	
Upr-Euro 204	0.00	0.00	
Upr-Euro 205	0.00	0.00	
Upr-Euro 206	0.00	0.00	
Upr-Euro 207	0.00	0.00	
Upr-Euro 208	0.00	0.00	
Upr-Euro 209	0.00	0.00	
Upr-Euro 210	0.00	0.00	
Upr-Euro 211	0.00	0.00	
Upr-Euro 212	0.00	0.00	
Upr-Euro 213	0.00	0.00	
Upr-Euro 214	0.00	0.00	
Upr-Euro 215	0.00	0.00	
Upr-Euro 216	0.00	0.00	
Upr-Euro 217	0.00	0.00	
Upr-Euro 218	0.00	0.00	
Upr-Euro 219	0.00	0.00	
Upr-Euro 220	0.00	0.00	
Upr-Euro 221	0.00	0.00	
Upr-Euro 222	0.00	0.00	
Upr-Euro 223	0.00	0.00	
Upr-Euro 224	0.00	0.00	
Upr-Euro 225	0.00	0.00	
Upr-Euro 226	0.00	0.00	
Upr-Euro 227	0.00	0.00	
Upr-Euro 228	0.00	0.00	
Upr-Euro 229	0.00	0.00	
Upr-Euro 230	0.00	0.00	
Upr-Euro 231	0.00	0.00	
Upr-Euro 232	0.00	0.00	
Upr-Euro 233	0.00	0.00	

[illegible]

Appendix C. Model Verification

Model verification is the process for comparing the modelled pollutant concentrations with the monitored concentrations for the same pollutant, and where necessary, adjusting the modelled results so they better align with the monitoring data. Given the complexities inherent throughout the model verification process, JAQU and Defra have provided specific guidance to inform this process and assist in the generation of robust data sets.

The model performance at each monitoring site is provided in Table C1-1 along with details of the zone and whether the site was used in the verification process.

Table C1-1: Summary of Verification Exercise

Receptor	Easting	Nothing	Site Type	Concentration $\mu\text{g}/\text{m}^3$		Data Capture %	Concentration $\mu\text{g}/\text{m}^3$				Mon/Mod Total NO_2	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Rd NO_x	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Road NO_2	Zone	Used In Verification
				NO_x	NO_2		Mod f- NO_2	BG_ NO_x_{16}	BG_ NO_2_{16}	Mod Total		Mod Road NO_x	Mon Road NO_x		Mod Rd NO_2	Mon Rd NO_2			
BHM1	411211	282756	DT	21.79	15.43	67%	0.27	28.96	19.55	28.28	0.83	17.60	-7.17	-0.41	8.73	-4.13	-0.47	0	Excluded
BHM2	404082	282128	DT	24.33	17.14	83%	0.27	32.82	21.60	30.62	0.79	18.30	-8.49	-0.46	9.02	-4.47	-0.50	0	Excluded
BHM3	407386	282131	DT	70.46	38.87	92%	0.28	28.98	19.53	33.95	-0.13	30.00	41.48	1.38	14.42	19.34	1.34	3	Used
BHM4	407404	282031	DT	75.21	40.87	83%	0.27	28.98	19.53	34.32	-0.16	30.90	46.23	1.50	14.79	21.33	1.44	3	Used
BHM5	409108	284158	DT	74.25	40.87	83%	0.27	38.01	24.35	42.29	0.03	39.70	36.24	0.91	17.94	16.52	0.92	1	Used
BHM6	409141	284054	DT	113.47	55.87	50%	0.26	38.01	24.35	40.14	-0.28	34.40	75.46	2.19	15.79	31.51	2.00	0	Excluded
BHM7	406114	286635	DT	94.87	49.35	83%	0.26	50.54	30.48	44.82	-0.09	32.70	44.33	1.36	14.34	18.87	1.32	2	Used
BHM8	406036	286489	DT	92.29	48.43	92%	0.25	50.54	30.48	46.02	-0.05	35.60	41.75	1.17	15.54	17.95	1.16	2	Used
BHM9	408618	291350	DT	74.81	40.32	92%	0.25	29.74	19.93	47.41	0.18	63.60	45.07	0.71	27.48	20.38	0.74	3	Used
BHM10	408818	284591	DT	66.23	37.27	83%	0.25	34.86	22.76	37.11	0.00	31.00	31.37	1.01	14.35	14.51	1.01	0	Excluded
BHM11	408818	284591	DT	63.90	36.27	83%	0.25	34.86	22.76	37.11	0.02	31.00	29.04	0.94	14.35	13.52	0.94	0	Excluded
BHM12	408818	284591	DT	66.40	37.34	83%	0.25	34.86	22.76	37.11	-0.01	31.00	31.54	1.02	14.35	14.58	1.02	0	Excluded
BHM13	411592	290438	DT	47.88	28.91	92%	0.25	32.69	21.51	39.97	0.38	40.40	15.19	0.38	18.46	7.41	0.40	0	Excluded
BHM14	411592	290438	DT	49.60	29.71	92%	0.26	32.69	21.51	39.97	0.35	40.40	16.91	0.42	18.46	8.20	0.44	0	Excluded
BHM15	411592	290438	DT	47.50	28.73	83%	0.26	32.69	21.51	39.97	0.39	40.40	14.81	0.37	18.46	7.23	0.39	0	Excluded
BHM16	407313	287534	DT	106.34	53.53	75%	0.26	47.36	29.11	51.62	-0.04	53.70	58.98	1.10	22.51	24.42	1.08	1	Used
BHM17	410004	289998	DT	93.70	48.10	83%	0.25	36.70	23.53	51.27	0.07	65.70	57.00	0.87	27.74	24.57	0.89	3	Used
BHM18	410073	290002	DT	90.36	46.58	92%	0.25	32.37	21.39	49.71	0.07	66.50	57.99	0.87	28.32	25.20	0.89	3	Used
BHM19	404739	279701	DT	90.50	48.00	50%	0.25	36.42	23.39	35.77	-0.25	25.70	54.08	2.10	12.38	24.61	1.99	0	Excluded
BHM20	404444	282884	DT	69.23	38.78	83%	0.28	32.82	21.60	36.05	-0.07	30.20	36.41	1.21	14.45	17.18	1.19	3	Used
BHM21	408195	287393	DT	134.23	62.26	83%	0.28	44.60	27.51	48.87	-0.21	50.40	89.63	1.78	21.36	34.74	1.63	2	Used
BHM22	405793	286648	DT	55.80	32.90	92%	0.24	38.32	24.60	38.28	0.16	29.80	17.48	0.59	13.68	8.30	0.61	0	Excluded
BHM23	406743	286539	DT	100.97	52.02	67%	0.25	50.54	30.48	53.05	0.02	53.10	50.43	0.95	22.57	21.54	0.95	0	Excluded
BHM24	406621	287108	DT	92.97	48.63	75%	0.26	48.29	29.55	46.41	-0.05	38.90	44.68	1.15	16.86	19.08	1.13	2	Used

Table C1-1: Summary of Verification Exercise

Receptor	Easting	Nothing	Site Type	Concentration $\mu\text{g}/\text{m}^3$		Data Capture %	Concentration $\mu\text{g}/\text{m}^3$				Mon/Mod Total NO_2	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Rd NO_x	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Road NO_2	Zone	Used In Verification
				NO_x	NO_2		Mod f- NO_2	BG NO_x 16	BG NO_2 16	Mod Total		Mod Road NO_x	Mon Road NO_x		Mod Rd NO_2	Mon Rd NO_2			
BHM25	408586	286455	DT	95.30	49.19	67%	0.25	44.04	27.35	48.38	-0.02	49.10	51.26	1.04	21.03	21.84	1.04	0	Excluded
BHM26	405648	287041	DT	37.09	23.93	92%	0.25	38.77	24.77	35.97	0.50	24.00	-1.68	-0.07	11.20	-0.84	-0.08	0	Excluded
BHM27	407836	288037	DT	92.52	47.77	92%	0.25	41.45	26.09	53.07	0.11	66.00	51.07	0.77	26.98	21.68	0.80	1	Used
BHM28	406762	287329	DT	123.11	59.58	83%	0.24	48.29	29.55	50.06	-0.16	48.10	74.82	1.56	20.51	30.03	1.46	1	Used
BHM29	406582	286728	DT	109.94	55.36	83%	0.25	50.54	30.48	52.17	-0.06	50.80	59.40	1.17	21.69	24.87	1.15	1	Used
BHM30	407967	287151	DT	87.06	46.14	58%	0.26	47.36	29.11	45.28	-0.02	37.50	39.70	1.06	16.17	17.03	1.05	0	Excluded
BHM31	406564	286685	DT	102.33	52.44	75%	0.24	50.54	30.48	49.64	-0.05	44.40	51.79	1.17	19.16	21.96	1.15	1	Used
BHM33	406702	286513	DT	101.20	51.99	83%	0.26	50.54	30.48	49.07	-0.06	42.90	50.66	1.18	18.59	21.51	1.16	1	Used
BHM34	407114	286906	DT	54.00	32.09	92%	0.26	50.21	30.29	44.71	0.39	33.00	3.79	0.11	14.42	1.80	0.12	0	Excluded
BHM35	407177	286996	DT	62.57	35.99	92%	0.24	50.21	30.29	45.28	0.26	34.70	12.36	0.36	14.99	5.70	0.38	0	Excluded
BHM36	407208	287064	DT	89.95	47.03	83%	0.24	47.36	29.11	45.37	-0.04	38.10	42.59	1.12	16.26	17.93	1.10	2	Used
BHM37	405380	285318	DT	58.83	34.21	50%	0.23	37.57	24.14	35.24	0.03	23.60	21.26	0.90	11.10	10.06	0.91	0	Excluded
BHM38	407217	287132	DT	110.03	54.15	75%	0.26	47.36	29.11	45.58	-0.16	38.70	62.67	1.62	16.47	25.04	1.52	2	Used
BHM39	407259	287112	DT	90.41	47.06	75%	0.23	47.36	29.11	46.58	-0.01	41.70	43.05	1.03	17.47	17.95	1.03	2	Used
BHM40	407407	287092	DT	112.77	54.63	92%	0.23	47.36	29.11	49.02	-0.10	48.90	65.41	1.34	19.91	25.52	1.28	2	Used
BHM41	407403	287079	DT	121.67	57.65	92%	0.22	47.36	29.11	48.68	-0.16	47.60	74.31	1.56	19.57	28.55	1.46	2	Used
BHM42	407548	287107	DT	87.11	45.75	92%	0.22	47.36	29.11	50.93	0.11	54.50	39.75	0.73	21.82	16.64	0.76	2	Used
BHM43	407617	287108	DT	90.54	47.15	92%	0.22	47.36	29.11	49.40	0.05	49.50	43.18	0.87	20.29	18.04	0.89	2	Used
BHM44	407638	287108	DT	92.54	47.90	92%	0.23	47.36	29.11	49.68	0.04	50.20	45.18	0.90	20.57	18.80	0.91	2	Used
BHM45	407581	287014	DT	91.55	47.43	92%	0.23	47.36	29.11	49.40	0.04	49.80	44.19	0.89	20.29	18.33	0.90	2	Used
BHM46	407567	287044	DT	154.95	66.95	92%	0.22	47.36	29.11	49.82	-0.26	51.50	107.59	2.09	20.71	37.84	1.83	2	Used
BHM47	407488	287023	DT	116.23	55.42	58%	0.22	47.36	29.11	51.71	-0.07	57.50	68.87	1.20	22.60	26.31	1.16	0	Excluded
BHM48	407503	286964	DT	98.85	50.08	83%	0.21	50.21	30.29	49.82	-0.01	47.90	48.64	1.02	19.53	19.79	1.01	2	Used
BHM49	407455	286989	DT	91.01	47.14	83%	0.22	50.21	30.29	51.94	0.10	54.70	40.80	0.75	21.65	16.85	0.78	2	Used
BHM50	407435	286926	DT	129.07	59.81	92%	0.22	50.21	30.29	52.29	-0.13	55.50	78.86	1.42	22.00	29.52	1.34	2	Used

Table C1-1: Summary of Verification Exercise

Receptor	Easting	Nothing	Site Type	Concentration $\mu\text{g}/\text{m}^3$		Data Capture %	Concentration $\mu\text{g}/\text{m}^3$				Mon/Mod Total NO_2	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Rd NO_x	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Road NO_2	Zone	Used In Verification
				NO_x	NO_2		Mod f- NO_2	BG NO_x 16	BG NO_2 16	Mod Total		Mod Road NO_x	Mon Road NO_x		Mod Rd NO_2	Mon Rd NO_2			
BHM51	406921	285937	DT	104.82	52.45	33%	0.22	34.31	22.45	44.81	-0.15	50.20	70.51	1.40	22.36	30.00	1.34	0	Excluded
BHM52	407372	286844	DT	137.20	62.31	92%	0.26	50.21	30.29	50.70	-0.19	50.70	86.99	1.72	20.41	32.02	1.57	2	Used
BHM53	407365	286791	DT	114.55	55.34	92%	0.22	50.21	30.29	50.66	-0.08	50.50	64.34	1.27	20.37	25.05	1.23	2	Used
BHM54	407324	286773	DT	126.20	59.39	92%	0.22	50.21	30.29	47.85	-0.19	42.00	75.99	1.81	17.56	29.10	1.66	2	Used
BHM55	407356	286719	DT	145.10	64.87	83%	0.23	50.21	30.29	49.58	-0.24	47.20	94.89	2.01	19.29	34.58	1.79	2	Used
BHM56	407377	286896	DT	91.64	47.53	92%	0.22	50.21	30.29	49.44	0.04	46.70	41.43	0.89	19.15	17.24	0.90	2	Used
BHM57	407692	283369	DT	49.91	29.85	50%	0.22	30.95	20.67	32.00	0.07	23.60	18.96	0.80	11.33	9.18	0.81	0	Excluded
BHM58	407255	286862	DT	85.07	45.25	50%	0.26	50.21	30.29	46.06	0.02	37.00	34.86	0.94	15.77	14.96	0.95	0	Excluded
BHM59	407273	286926	DT	86.39	45.60	58%	0.23	50.21	30.29	47.30	0.04	40.80	36.18	0.89	17.01	15.31	0.90	0	Excluded
BHM60	407234	286985	DT	86.32	45.67	83%	0.23	50.21	30.29	46.44	0.02	38.20	36.11	0.95	16.15	15.38	0.95	2	Used
BHM61	406919	287037	DT	67.68	38.38	92%	0.23	48.29	29.55	45.08	0.17	35.80	19.39	0.54	15.53	8.83	0.57	2	Used
BHM62	407032	287195	DT	78.85	42.92	92%	0.24	47.36	29.11	45.78	0.07	38.80	31.49	0.81	16.67	13.81	0.83	2	Used
BHM63	407509	287225	DT	61.86	35.73	92%	0.24	47.36	29.11	49.78	0.39	50.40	14.50	0.29	20.67	6.62	0.32	2	Used
BHM64	406973	286751	DT	100.29	51.34	92%	0.23	50.54	30.48	45.24	-0.12	33.80	49.75	1.47	14.76	20.86	1.41	2	Used
BHM65	407448	286479	DT	116.43	56.31	75%	0.25	50.21	30.29	50.74	-0.10	50.00	66.22	1.32	20.45	26.02	1.27	2	Used
BHM66	407421	288294	DT	97.25	49.68	82%	0.23	41.45	26.09	46.28	-0.07	46.70	55.80	1.19	20.19	23.59	1.17	0	Excluded
BHM67	407044	288318	DT	74.60	40.98	100%	0.25	41.45	26.09	45.44	0.11	44.40	33.15	0.75	19.35	14.89	0.77	0	Excluded
BHM68	405781	288131	DT	94.77	48.82	100%	0.25	34.72	22.69	37.84	-0.22	32.60	60.05	1.84	15.15	26.13	1.72	0	Excluded
BHM69	405806	288115	DT	77.86	42.24	100%	0.26	34.72	22.69	38.75	-0.08	34.60	43.14	1.25	16.06	19.55	1.22	0	Excluded
BHM70	405225	287000	DT	53.11	31.67	73%	0.26	38.77	24.77	36.73	0.16	25.50	14.34	0.56	11.96	6.90	0.58	0	Excluded
BHM71	405300	286430	DT	58.22	34.03	100%	0.26	38.32	24.60	37.69	0.11	28.20	19.90	0.71	13.09	9.44	0.72	0	Excluded
BHM72	405285	286395	DT	42.66	26.74	82%	0.26	38.32	24.60	36.50	0.36	25.50	4.34	0.17	11.90	2.15	0.18	0	Excluded
BHM73	406038	285961	DT	97.36	49.35	100%	0.26	34.31	22.45	38.75	-0.21	35.70	63.05	1.77	16.30	26.90	1.65	0	Excluded
BHM74	406018	285933	DT	173.05	73.54	100%	0.25	34.31	22.45	38.11	-0.48	34.20	138.74	4.06	15.66	51.09	3.26	0	Excluded
BHM75	406355	285729	DT	87.87	46.00	100%	0.25	34.31	22.45	38.73	-0.16	35.30	53.56	1.52	16.28	23.54	1.45	0	Excluded

Table C1-1: Summary of Verification Exercise

Receptor	Easting	Nothing	Site Type	Concentration $\mu\text{g}/\text{m}^3$		Data Capture %	Concentration $\mu\text{g}/\text{m}^3$				Mon/Mod Total NO_2	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Rd NO_x	Concentration $\mu\text{g}/\text{m}^3$		Mon/Mod Road NO_2	Zone	Used In Verification
				NO_x	NO_2		Mod f- NO_2	BG NO_x 16	BG NO_2 16	Mod Total		Mod Road NO_x	Mon Road NO_x		Mod Rd NO_2	Mon Rd NO_2			
BHM76	406367	285665	DT	53.15	31.50	100%	0.26	34.31	22.45	36.29	0.15	29.70	18.84	0.63	13.84	9.04	0.65	0	Excluded
BHM77	406936	285461	DT	73.40	40.27	91%	0.26	34.31	22.45	44.67	0.11	50.10	39.09	0.78	22.22	17.82	0.80	0	Excluded
BHM78	406912	285418	DT	81.78	43.69	73%	0.26	34.31	22.45	41.37	-0.05	41.70	47.47	1.14	18.92	21.23	1.12	0	Excluded
BHM79	407373	285211	DT	58.60	34.09	100%	0.26	38.16	24.44	40.83	0.20	36.20	20.44	0.56	16.39	9.65	0.59	0	Excluded
BHM80	407386	285241	DT	86.80	45.80	100%	0.25	38.16	24.44	42.71	-0.07	40.80	48.64	1.19	18.27	21.36	1.17	0	Excluded
BHM81	408015	285303	DT	91.00	47.43	82%	0.25	40.84	25.71	42.79	-0.10	38.30	50.16	1.31	17.08	21.72	1.27	0	Excluded
BHM82	407979	285315	DT	86.97	45.74	82%	0.25	38.16	24.44	41.28	-0.10	37.50	48.81	1.30	16.84	21.30	1.26	0	Excluded
BHM83	408558	286447	DT	210.17	84.79	91%	0.25	44.04	27.35	47.82	-0.44	47.70	166.13	3.48	20.47	57.44	2.81	0	Excluded
BHM84	408168	287377	DT	159.98	70.16	82%	0.25	44.60	27.51	46.70	-0.33	44.60	115.38	2.59	19.19	42.65	2.22	0	Excluded
BHM85	407807	288037	DT	176.15	74.35	100%	0.24	41.45	26.09	50.55	-0.32	58.70	134.70	2.29	24.46	48.25	1.97	0	Excluded
BHM86	407171	287561	DT	87.48	46.54	100%	0.24	47.36	29.11	51.26	0.10	52.50	40.12	0.76	22.15	17.43	0.79	0	Excluded
BHM87	407163	287599	DT	204.33	84.35	91%	0.25	47.36	29.11	52.85	-0.37	56.50	156.97	2.78	23.74	55.25	2.33	0	Excluded
BHM88	406797	287315	DT	160.85	71.49	73%	0.25	48.29	29.55	51.02	-0.29	50.80	112.56	2.22	21.47	41.94	1.95	0	Excluded
BHM89	406581	287097	DT	120.35	58.45	91%	0.25	48.29	29.55	46.51	-0.20	39.00	72.06	1.85	16.96	28.91	1.70	0	Excluded
BHM90	406716	287411	DT	63.15	36.42	82%	0.25	48.29	29.55	45.92	0.26	37.70	14.86	0.39	16.37	6.88	0.42	0	Excluded
BHM91	409496	287938	DT	82.97	44.23	100%	0.25	42.21	26.38	40.56	-0.08	31.60	40.76	1.29	14.18	17.85	1.26	0	Excluded
BHM92	406882	285924	DT	116.33	56.50	73%	0.24	34.31	22.45	43.46	-0.23	46.80	82.02	1.75	21.01	34.05	1.62	0	Excluded
BHM93	407052	288283	DT	98.93	50.36	91%	0.26	41.45	26.09	44.48	-0.12	41.90	57.48	1.37	18.39	24.27	1.32	0	Excluded
B'ham Tyburn Roadside	411577	290491	CM	100.04	42.64	68%	0.25	32.69	21.51	41.77	-0.02	44.80	67.36	1.50	20.26	21.13	1.04	0	Excluded
Birmingham Tyburn	411592	290440	CM	54.16	28.96	99%	0.26	32.69	21.51	39.97	0.38	40.40	21.47	0.53	18.46	7.46	0.40	0	Excluded
New Hall	414574	296724	CM	25.14	17.09	83%	0.26	23.64	16.48	19.72	0.15	6.08	1.50	0.25	3.24	0.62	0.19	0	Excluded
Stratford Road	408820	284591	CM	79.22	35.09	96%	0.27	34.86	22.76	37.32	0.06	31.50	44.36	1.41	14.56	12.33	0.85	1	Used
Bristol Road	404545	283020	CM	67.03	29.05	83%	0.25	47.46	28.62	42.46	0.46	29.90	19.57	0.65	13.84	0.43	0.03	3	Used
Moor Street Q'way	407435	286891	CM	138.90	51.82	94%	0.28	50.21	30.29	50.94	-0.02	51.50	88.69	1.72	20.65	21.53	1.04	2	Used
Acocks Green	411649	282207	CM	32.65	21.31	99%	0.22	28.96	19.55	26.84	0.26	14.60	3.70	0.25	7.29	1.76	0.24	0	Excluded

A number of sites were excluded from the model verification process, including those summarised in Table C1-2, together with any sites with a data capture rate of <75%.

Additionally, a verification scenario run including the sites BMH66 to BMH93 with the Sept 2016 to July 2017 monitoring result (annualised) to 2016 was undertaken. However, the additional dataset increased overall model uncertainty in Zone 1 with a root mean square error (RMSE) of >10 $\mu\text{g}/\text{m}^3$. Therefore, only the 2016 calendar year dataset has been selected.


Table C1-2: Summary of Sites Excluded from Verification

Ref	Reason To Exclude
Birmingham Tyburn	Background Site
New Hall	Background Site
Acocks Green	Background Site
BHM10	Co-located with Stratford Road Continuous Monitor
BHM11	Co-located with Stratford Road Continuous Monitor
BHM12	Co-located with Stratford Road Continuous Monitor
BHM13	Co-located with Tyburn Background Continuous Monitor
BHM14	Co-located with Tyburn Background Continuous Monitor
BHM15	Co-located with Tyburn Background Continuous Monitor
BHM1	Background Site
BHM2	Background Site
BHM22	Background Site
BHM26	Background Site
BHM34	Background Site

The results of the model verification process are summarised below. The raw model outputs for the 44 sites used in the verification have been compared to the monitoring data, before any zoning was considered. This showed a systematic under prediction, as shown in the fraction bias value of 0.04, most prevalent at the monitored concentrations greater than 50 $\mu\text{g}/\text{m}^3$. Analysis was undertaken to address the overall under prediction, and refine the model performance.

Table C1-3: Model Performance Statistics (Unadjusted)

	No Adjustment
Number of Sites	44
Modelled NO _x Rd v Monitored NO _x Rd Factor	n/a
Modelled NO ₂ Rd v Monitored NO ₂ Rd Factor	n/a
RMSE	7.0
Fractional Bias	0.04
Correlation Coefficient	0.57
No. sites within $\pm 25\%$	41

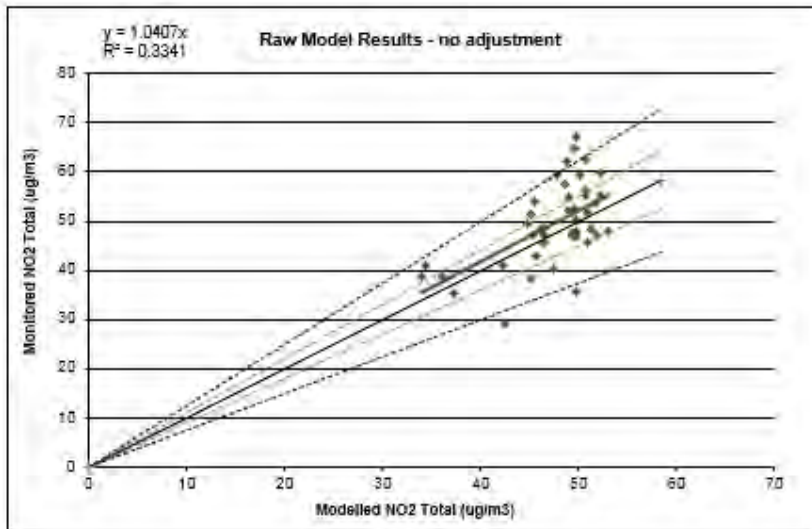Table C1-4: Modelled vs Monitored Total NO₂ for all sites (Unadjusted)

A verification process was applied following guidance in LAQM.TG (16) to adjust road NO_x, with a further adjustment applied to road NO₂. Spatial analysis of the model performance was reviewed, and the model delineated into 3 zones:

Table C1-5: Summary of Delineated Zones

Zone No.	Description	No. Monitoring Sites
1	Sites beside the primary road network (PCM links), within the Detailed and Speed Flow region of the Saturn model	8
2	Sites within central Birmingham	29
3	Sites in the Buffer region	7

The verification process was applied, and the resulting model performance of the zones is presented in Table C1-6.

Table C1-6: Model Performance Within Delineated Zones

	No Adjustment	Zone 1	Zone 2	Zone 3
No. Sites	44	8	29	7
Mod NO _x Rd v Mon NO _x Rd Factor	n/a	1.105	1.233	0.902
Mod NO ₂ Rd v Mon NO ₂ Rd Factor	n/a	0.975	0.967	0.973
RMSE	7.0	4.2	7.0	6.4
Fractional Bias	0.04	0.00	0.00	0.01
Correlation Coefficient	0.57	0.84	0.34	0.44
No. sites within ±25%	41	8	28	6

The results show that the RMSE for each zone is improved compared to the overall dataset, and the fractional bias reduced. Overall the number of sites within $\pm 25\%$ of monitored concentrations is reduced from 3 to 2 locations.

There was one roadside continuous analyser in each zone. In zones 1 and 2 (Stratford Rd and Moor St Queensway, respectively), the continuous analyser results were both within $\pm 10\%$ of monitored concentrations following model adjustment, indicating their performance was consistent with the diffusion tubes within that zone. In zone 3, the roadside continuous analyser (Bristol Road) recorded atypically low concentrations compared with the roadside diffusion tubes, and as a result the modelled concentrations based on the verification process are an over-prediction at this site. Removal of the Bristol Road analyser from the zone would increase the road NO_x adjustment factor from 0.902 to 0.916.

These verification factors were applied to the model results on the zonal basis described.

The model road NO_x and total NO₂ (pre- and post- adjustment) are provided for each zone in the following graphs.

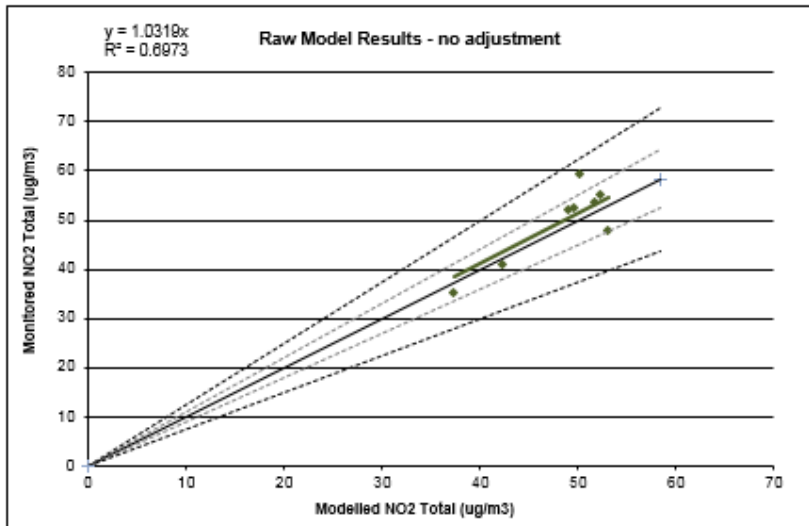
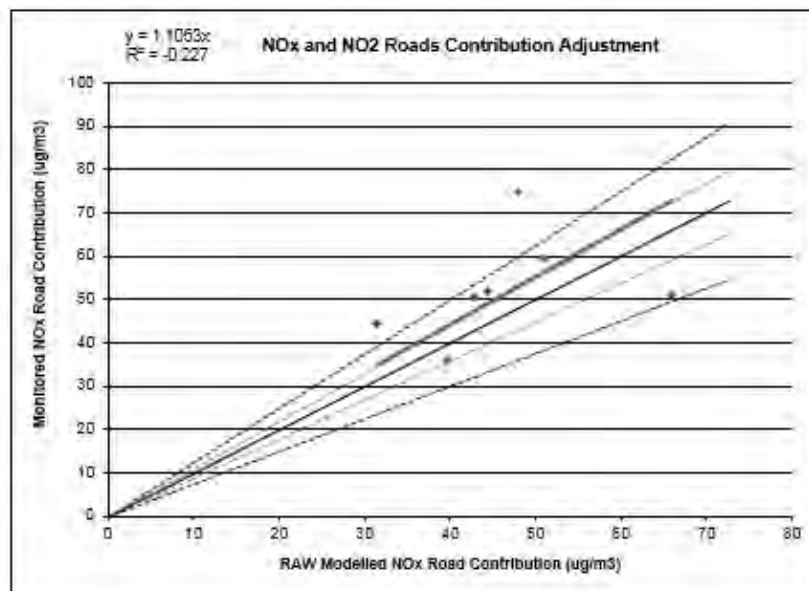
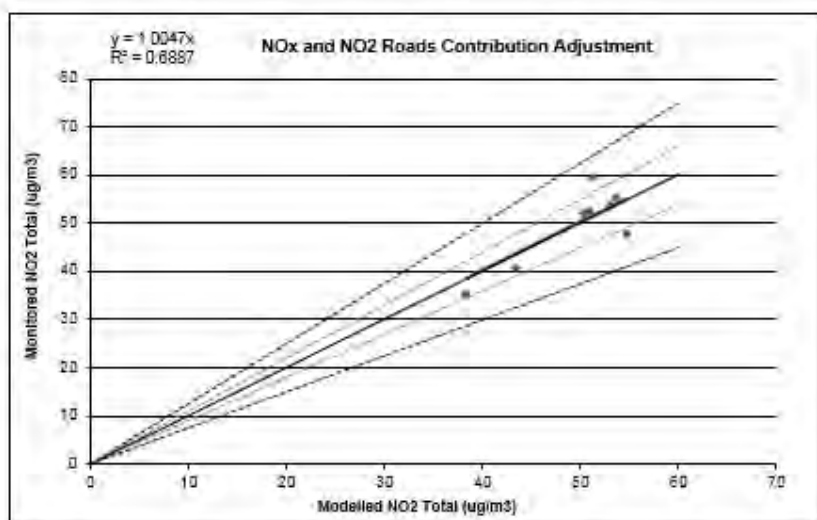
Zone 1:Table C1-7: Modelled vs Monitored Total NO₂ for Zone 1 (Unadjusted)Table C1-8: Modelled vs Monitored Road NO_x for Zone 1 (Unadjusted)

Table C1-9: Modelled vs Monitored Total NO₂ for Zone 1 (Adjusted)

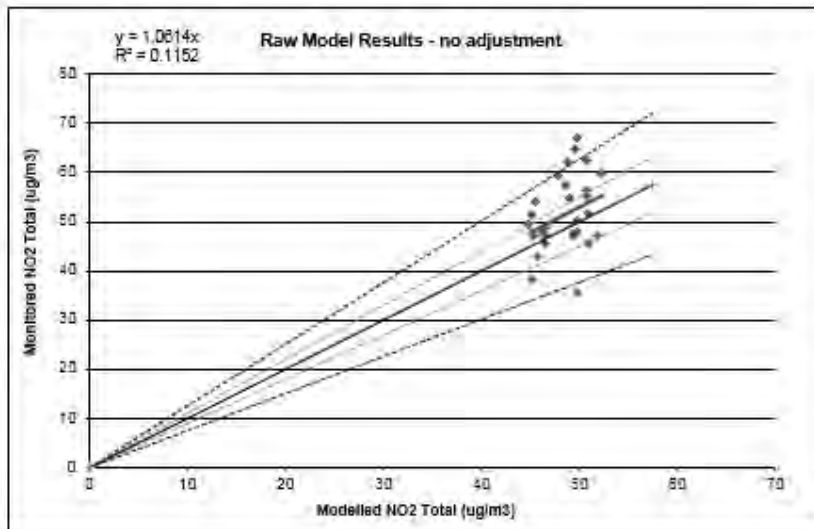
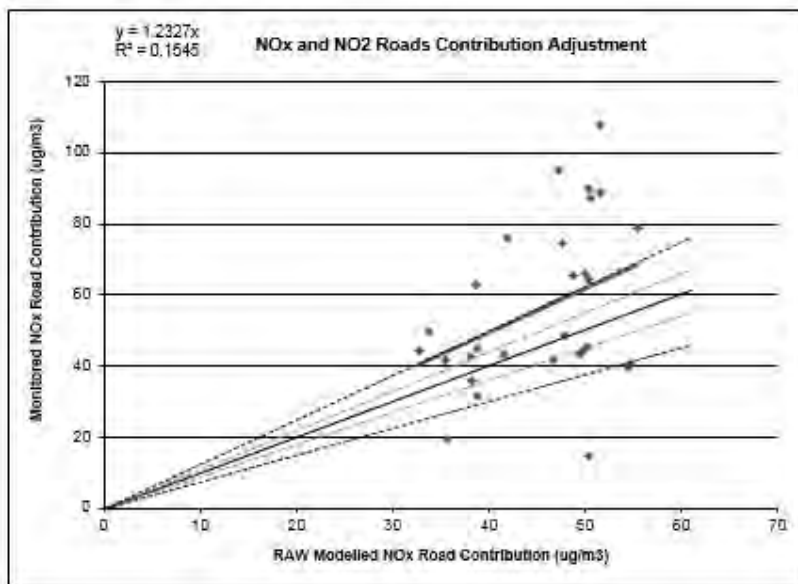
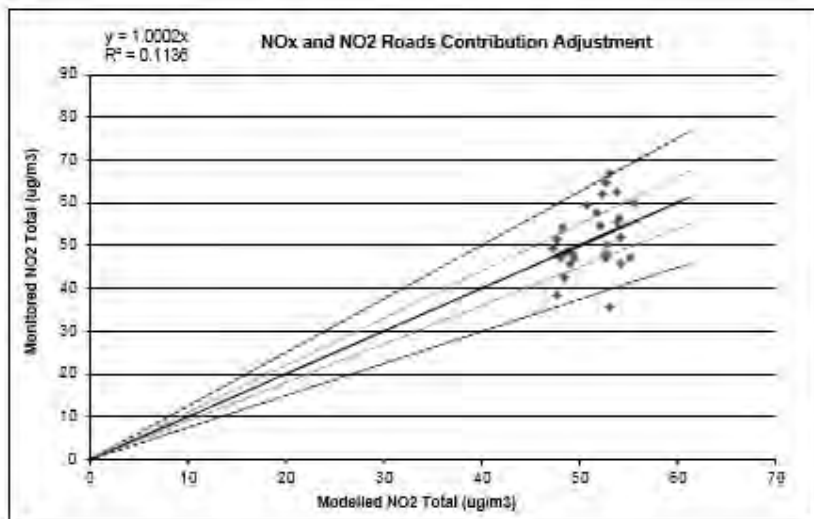
Zone 2:Table C1-10: Modelled vs Monitored Total NO₂ for Zone 2 (Unadjusted)Table C1-11: Modelled vs Monitored Road NO_x for Zone 2 (Unadjusted)

Table C1-12: Modelled vs Monitored Total NO₂ for Zone 2 (Adjusted)

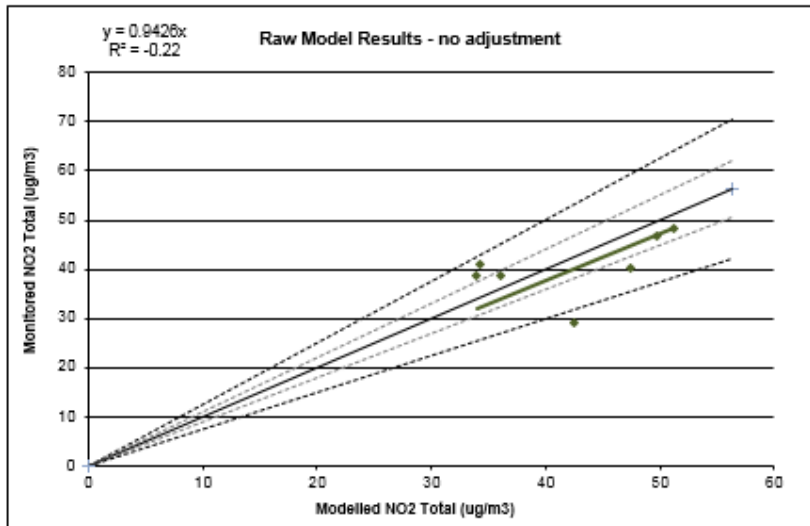
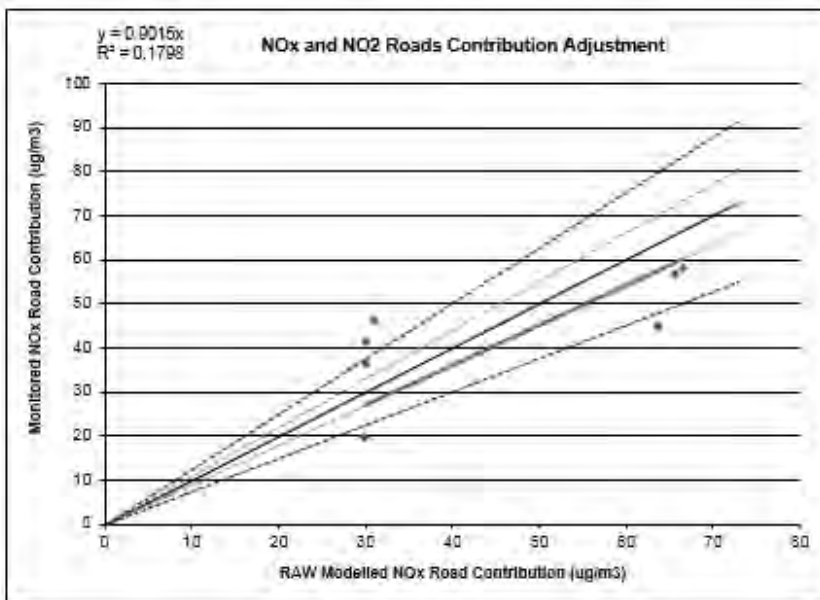
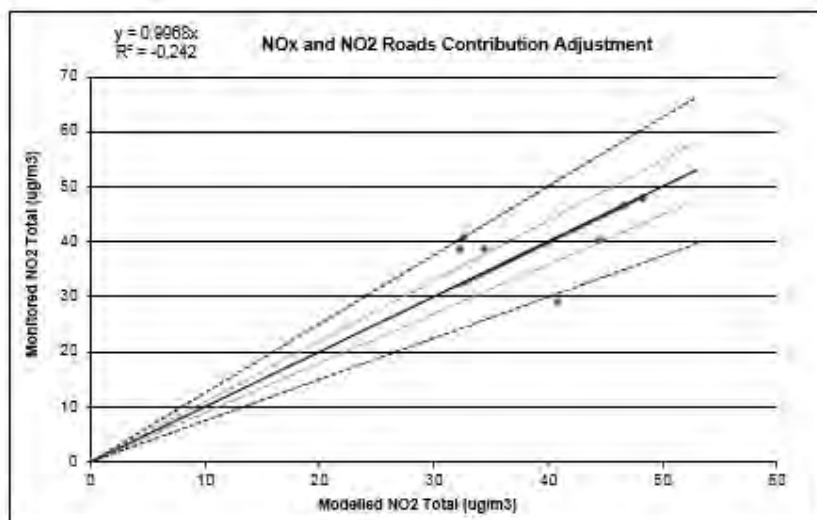
Zone 3:Table C1-13: Modelled vs Monitored Total NO₂ for Zone 3 (Unadjusted)Table C1-14: Modelled vs Monitored Road NO_x for Zone 3 (Unadjusted)

Table C1-15: Modelled vs Monitored Total NO₂ for Zone 3 (Adjusted)

Appendix D. Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
1	PCM_0	406752	286515	BCC	81490	A4400 Suffolk St. Queensway	48.8	45.0	43.5	42.7	-3.8	-5.3	-6.1	-7.8	-10.9	-12.5
2	PCM_2	407477	287785	BCC	56394	A38 Corporation St.	46.6	42.6	41.3	40.6	-4.0	-5.3	-6.0	-8.6	-11.4	-12.9
3	PCM_3	406861	285777	BCC	81489	A38 Bristol St.	37.4	34.4	33.1	32.6	-3.0	-4.3	-4.8	-8.0	-11.5	-12.8
4	PCM_4	407844	288028	BCC	7676	A4540 Dartmouth Circus	44.8	41.7	41.2	40.8	-3.1	-3.6	-4.0	-6.9	-8.0	-8.9
5	PCM_6	408473	286918	BCC	27736	A4540 Watery Lane Middleway	46.9	41.8	41.7	41.4	-5.1	-5.2	-5.5	-10.9	-11.1	-11.7
6	PCM_8	406860	285495	BCC	17998	A4540 Belgrave Middleway	39.5	36.2	35.0	34.5	-3.3	-4.5	-5.0	-8.4	-11.4	-12.7
7	PCM_10	410204	290048	BCC		A38 Tyburn Road	37.4	36.6	36.5	36.3	-0.8	-0.9	-1.1	-2.1	-2.4	-2.9
8	PCM_11	407836	289062	BCC	57233	A38(M) Aston Expressway	40.0	37.8	37.1	36.5	-2.2	-2.9	-3.5	-5.5	-7.3	-8.8
9	PCM_12	407257	285308	BCC	57194	A4540 Belgrave Middleway	37.3	35.5	35.0	34.8	-1.8	-2.3	-2.5	-4.8	-6.2	-6.7
10	PCM_13	408578	290003	BCC	36070	A38(M) Aston Expressway (Elevated Rd.)	39.2	37.6	37.1	36.6	-1.6	-2.1	-2.6	-4.1	-5.4	-6.6
11	PCM_14	407594	288084	BCC	70227	A38(M) Aston Expressway	44.5	40.8	39.6	38.9	-3.7	-4.9	-5.6	-8.3	-11.0	-12.6
12	PCM_15	413727	291047	BCC	47202	A452 Chester Rd.	34.2	34.1	34.2	34.2	-0.1	0.0	0.0	-0.3	0.0	0.0
13	PCM_16	408461	285861	BCC	28042	A4540 Bordesley Middleway	38.6	37.0	36.9	36.6	-1.6	-1.7	-2.0	-4.1	-4.4	-5.2
14	PCM_17	407312	288273	BCC	37779	A4540 Newtown Middleway	40.9	38.5	38.1	37.7	-2.4	-2.8	-3.2	-5.9	-6.8	-7.8
15	PCM_18	408027	287667	BCC	57193	A4540 Lawley Middleway	42.1	39.9	39.6	39.3	-2.2	-2.5	-2.8	-5.2	-5.9	-6.7
16	PCM_20	404909	286003	BCC	7179	A456 Hagley Rd.	30.8	29.1	29.0	28.7	-1.7	-1.8	-2.1	-5.5	-5.8	-6.8
17	PCM_21	409968	289903	HE	48185	M6	42.7	41.9	41.8	41.6	-0.8	-0.9	-1.1	-1.9	-2.1	-2.6
18	PCM_24	410214	290721	BCC	27773	A38(M) Aston Expressway	31.8	31.2	30.9	30.7	-0.6	-0.9	-1.1	-1.9	-2.8	-3.5
19	PCM_26	406858	288359	BCC	17644	A4540 New John St. West	35.4	33.6	33.4	33.1	-1.8	-2.0	-2.3	-5.1	-5.6	-6.5
20	PCM_27	407083	291647	BCC	17132	A453 Aldridge Rd.	31.4	30.7	30.5	30.3	-0.7	-0.9	-1.1	-2.2	-2.9	-3.5
21	PCM_28	408950	285641	BCC	28465	A45(T) Coventry Rd.	36.6	35.2	34.9	34.7	-1.4	-1.7	-1.9	-3.8	-4.6	-5.2
22	PCM_29	411671	290578	BCC	56399	A38 Tyburn Rd.	33.7	33.2	33.2	33.1	-0.5	-0.5	-0.6	-1.5	-1.5	-1.8
23	PCM_30	408837	291121	HE	70230	M6	41.9	41.2	41.1	41.0	-0.7	-0.8	-0.9	-1.7	-1.9	-2.1
24	PCM_32	415263	284344	BCC	56416	A45(T) Coventry Rd.	27.5	27.2	27.2	27.2	-0.3	-0.3	-0.3	-1.1	-1.1	-1.1

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
25	PCM_34	412665	290982	BCC	6390	A38 Kingsbury Rd.	31.2	30.8	30.8	30.8	-0.4	-0.4	-0.4	-1.3	-1.3	-1.3
26	PCM_35	408084	285451	BCC	47166	A4540 Highgate Middleway	37.1	35.6	35.4	35.2	-1.5	-1.7	-1.9	-4.0	-4.6	-5.1
27	PCM_38	406168	285875	BCC	37780	A4540 Lee Bank Middleway	33.4	31.7	31.3	31.1	-1.7	-2.1	-2.3	-5.1	-6.3	-6.9
28	PCM_39	406762	287329	BCC	81492	A4400 Lancaster Circus Q'way	44.8	41.4	40.1	39.5	-3.4	-4.7	-5.3	-7.6	-10.5	-11.8
29	PCM_41	407381	292440	BCC	47206	A453 College Rd.	32.7	32.2	32.0	31.9	-0.5	-0.7	-0.8	-1.5	-2.1	-2.4
30	PCM_43	405799	288186	BCC	47731	A4540 Icknield St.	32.5	31.7	31.8	31.6	-0.8	-0.7	-0.9	-2.5	-2.2	-2.8
31	PCM_44	405626	287598	BCC	47731	A4540 Icknield St.	34.9	33.7	33.8	33.5	-1.2	-1.1	-1.4	-3.4	-3.2	-4.0
32	PCM_45	403507	286035	BCC	38552	A456 Hagley Rd.	26.6	25.6	25.4	25.2	-1.0	-1.2	-1.4	-3.8	-4.5	-5.3
33	PCM_48	412138	288809	BCC	27690	A4040 Bromford Lane	33.3	33.0	33.1	33.0	-0.3	-0.2	-0.3	-0.9	-0.6	-0.9
34	PCM_50	407025	291233	BCC	75005	A453 Aldridge Rd.	33.0	32.3	32.1	31.9	-0.7	-0.9	-1.1	-2.1	-2.7	-3.3
35	PCM_51	404129	282515	BCC	81576	A4040 Chapel Lane	28.4	28.1	28.1	28.0	-0.3	-0.3	-0.4	-1.1	-1.1	-1.4
36	PCM_54	406776	285419	BCC	26395	A38 Bristol Rd.	36.6	33.8	32.8	32.4	-2.8	-3.8	-4.2	-7.7	-10.4	-11.5
37	PCM_55	406670	290330	BCC	56330	A34 New Town Row	31.5	30.0	29.7	29.5	-1.5	-1.8	-2.0	-4.8	-5.7	-6.3
38	PCM_56	406697	284702	BCC	47176	A441 Pershore Rd.	30.6	29.0	28.6	28.3	-1.6	-2.0	-2.3	-5.2	-6.5	-7.5
39	PCM_60	407906	288814	BCC	46398	A5127 Lichfield Rd.	40.5	38.4	37.8	37.4	-2.1	-2.7	-3.1	-5.2	-6.7	-7.7
40	PCM_61	405450	287362	BCC	27737	A4540 Icknield St.	33.6	32.7	32.8	32.6	-0.9	-0.8	-1.0	-2.7	-2.4	-3.0
41	PCM_63	404776	283163	BCC	81577	A38 Bristol Rd.	34.7	34.0	33.9	33.7	-0.7	-0.8	-1.0	-2.0	-2.3	-2.9
42	PCM_65	403488	283605	BCC	81575	A4040 Harborne Park Rd.	22.3	22.1	22.2	22.1	-0.2	-0.1	-0.2	-0.9	-0.4	-0.9
43	PCM_66	402119	285954	BCC	37233	A456 Hagley Rd. West	24.6	24.4	24.4	24.2	-0.2	-0.2	-0.4	-0.8	-0.8	-1.6
44	PCM_67	414424	292023	BCC	26393	A38 Kingsbury Rd.	27.6	27.3	27.3	27.3	-0.3	-0.3	-0.3	-1.1	-1.1	-1.1
45	PCM_69	413022	291939	BCC	17128	A452 Chester Rd.	32.9	32.7	32.8	32.7	-0.2	-0.1	-0.2	-0.6	-0.3	-0.6
46	PCM_70	405427	286269	BCC	7677	A4540 Ladywood Middleway	33.2	31.8	31.7	31.5	-1.4	-1.5	-1.7	-4.2	-4.5	-5.1
47	PCM_73	411162	283879	BCC	28476	A41 Warwick Rd.	29.0	28.6	28.6	28.5	-0.4	-0.4	-0.5	-1.4	-1.4	-1.7
48	PCM_74	404984	279846	BCC	7142	A441 Pershore Rd.	32.2	31.9	31.9	31.8	-0.3	-0.3	-0.4	-0.9	-0.9	-1.2
49	PCM_76	410198	283914	BCC	26454	A41 Warwick Rd.	27.3	26.8	26.8	26.6	-0.5	-0.5	-0.7	-1.8	-1.8	-2.6
50	PCM_78	405669	283632	BCC	6392	A38 Bristol Rd.	29.0	27.5	27.1	26.9	-1.5	-1.9	-2.1	-5.2	-6.6	-7.2

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
51	PCM_79	409221	284326	BCC	48068	A41 Warwick Rd.	33.8	32.6	32.5	32.3	-1.2	-1.3	-1.5	-3.6	-3.8	-4.4
52	PCM_83	408525	285031	BCC	56331	A41 Stratford Rd.	35.5	33.7	33.5	33.2	-1.8	-2.0	-2.3	-5.1	-5.6	-6.5
53	PCM_85	412309	284572	BCC	17593	A4040 Stockfield Rd.	31.5	31.3	31.4	31.3	-0.2	-0.1	-0.2	-0.6	-0.3	-0.6
54	PCM_86	407715	288583	BCC	74479	A38(M) Aston Expressway	45.0	42.2	41.3	40.7	-2.8	-3.7	-4.3	-6.2	-8.2	-9.6
55	PCM_87	404974	287651	BCC	37238	A457 Spring Hill	28.9	27.9	27.7	27.5	-1.0	-1.2	-1.4	-3.5	-4.2	-4.8
56	PCM_88	408277	284783	BCC	7927	A4540 Highgate Rd.	31.6	30.1	30.0	29.8	-1.5	-1.6	-1.8	-4.7	-5.1	-5.7
57	PCM_89	403255	290217	BCC	6448	A41 Holyhead Rd.	22.4	22.3	22.2	22.2	-0.1	-0.2	-0.2	-0.4	-0.9	-0.9
58	PCM_90	409831	290070	BCC	70236	A38(M) Tyburn Rd.	36.3	35.5	35.4	35.2	-0.8	-0.9	-1.1	-2.2	-2.5	-3.0
59	PCM_91	412949	290234	BCC	99233	A47 Fort Parkway	33.2	32.9	32.9	32.8	-0.3	-0.3	-0.4	-0.9	-0.9	-1.2
60	PCM_92	401772	278975	BCC	46400	A38 Bristol Rd. South	22.7	22.5	22.4	22.3	-0.2	-0.3	-0.4	-0.9	-1.3	-1.8
61	PCM_93	404420	289540	BCC	28039	A41 Soho Rd.	29.7	28.6	28.5	28.3	-1.1	-1.2	-1.4	-3.7	-4.0	-4.7
62	PCM_94	405828	282547	BCC	27167	A441 Pershore Rd.	24.6	23.7	23.4	23.3	-0.9	-1.2	-1.3	-3.7	-4.9	-5.3
63	PCM_95	411355	280336	BCC	73055	A34 Stratford Rd.	24.9	24.8	24.8	24.7	-0.1	-0.1	-0.2	-0.4	-0.4	-0.8
64	PCM_96	406055	288388	BCC	70221	A4540	35.2	33.9	33.8	33.5	-1.3	-1.4	-1.7	-3.7	-4.0	-4.8
65	PCM_97	403782	290765	BCC	57689	A4040 Oxhill Rd.	22.6	22.5	22.5	22.5	-0.1	-0.1	-0.1	-0.4	-0.4	-0.4
66	PCM_98	409796	289307	BCC	75461	A47 Nechells Parkway	34.0	33.5	33.5	33.4	-0.5	-0.5	-0.6	-1.5	-1.5	-1.8
67	PCM_99	404282	287636	BCC	58153	A457 Dudley Rd.	28.9	27.9	27.8	27.7	-1.0	-1.1	-1.2	-3.5	-3.8	-4.2
68	PCM_100	411812	292780	BCC	37222	A452 Chester Rd.	31.4	31.2	31.2	31.2	-0.2	-0.2	-0.2	-0.6	-0.6	-0.6
69	PCM_101	405948	288561	BCC	70223	A4540 New John St. West	33.1	31.6	31.4	31.1	-1.5	-1.7	-2.0	-4.5	-5.1	-6.0
70	PCM_102	411244	292289	BCC	47777	A5127 Birmingham Rd.	29.2	28.8	28.7	28.5	-0.4	-0.5	-0.7	-1.4	-1.7	-2.4
71	PCM_103	411333	290157	BCC	75001	A4040 Wheelwright Rd.	35.9	35.5	35.4	35.3	-0.4	-0.5	-0.6	-1.1	-1.4	-1.7
72	PCM_104	403755	289766	BCC	36456	A41 Holyhead Rd.	29.1	28.8	28.6	28.5	-0.3	-0.5	-0.6	-1.0	-1.7	-2.1
73	PCM_105	411537	283251	BCC	47688	A4040 Fox Hollies Rd.	31.5	31.3	31.4	31.4	-0.2	-0.1	-0.1	-0.6	-0.3	-0.3
74	PCM_107	404935	279189	BCC	37198	A441 Pershore Rd. South	32.6	32.4	32.4	32.3	-0.2	-0.2	-0.3	-0.6	-0.6	-0.9
75	PCM_109	409456	290312	HE	70234	M6	39.6	38.9	38.7	38.6	-0.7	-0.9	-1.0	-1.8	-2.3	-2.5
76	PCM_110	405765	288416	BCC	70222	A4540 Heaton St.	31.1	30.2	30.1	30.0	-0.9	-1.0	-1.1	-2.9	-3.2	-3.5
77	PCM_111	405402	293241	BCC	46365	A34 Walsall Rd.	23.3	22.9	22.8	22.7	-0.4	-0.5	-0.6	-1.7	-2.1	-2.6

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
78	PCM_113	405229	289267	BCC	16423	A41 Soho Hill	29.1	28.1	27.9	27.6	-1.0	-1.2	-1.5	-3.4	-4.1	-5.2
79	PCM_114	401966	279754	BCC	16367	A38 Bristol Rd. South	24.1	23.7	23.7	23.6	-0.4	-0.4	-0.5	-1.7	-1.7	-2.1
80	PCM_115	409949	282822	BCC	26361	A34 Stratford Rd.	25.0	24.6	24.5	24.4	-0.4	-0.5	-0.6	-1.6	-2.0	-2.4
81	PCM_116	409195	290614	HE	70233	M6	40.6	39.8	39.7	39.4	-0.8	-0.9	-1.2	-2.0	-2.2	-3.0
82	PCM_117	411658	297851	BCC	27203	A5127 Lichfield Rd.	22.4	22.3	22.4	22.4	-0.1	0.0	0.0	-0.4	0.0	0.0
83	PCM_118	410496	293811	BCC	7167	A452 Chester Rd.	31.2	31.0	31.0	31.0	-0.2	-0.2	-0.2	-0.6	-0.6	-0.6
84	PCM_119	407512	280005	BCC	37188	A435 Alcester Rd. South	22.4	22.1	22.1	22.0	-0.3	-0.3	-0.4	-1.3	-1.3	-1.8
85	PCM_120	410877	281437	BCC	27691	A4040 Fox Hollies Rd.	26.9	26.7	26.8	26.8	-0.2	-0.1	-0.1	-0.7	-0.4	-0.4
86	PCM_121	411945	283283	BCC	6449	A41 Warwick Rd.	27.8	27.5	27.5	27.4	-0.3	-0.3	-0.4	-1.1	-1.1	-1.4
87	PCM_122	412630	285198	BCC	57729	A4040 Church Rd.	32.2	32.0	32.1	32.1	-0.2	-0.1	-0.1	-0.6	-0.3	-0.3
88	PCM_123	409583	294591	BCC	27191	A452 Chester Rd. North	29.0	28.7	28.8	28.7	-0.3	-0.2	-0.3	-1.0	-0.7	-1.0
89	PCM_124	411426	290122	BCC	75000	A4040 Bromford Lane	39.3	39.0	38.9	38.8	-0.3	-0.4	-0.5	-0.8	-1.0	-1.3
90	PCM_125	411834	295634	BCC	37227	A5127 Birmingham Rd.	30.7	30.5	30.5	30.4	-0.2	-0.2	-0.3	-0.7	-0.7	-1.0
91	PCM_126	412976	287572	BCC	7628	A4040 Station Rd.	36.5	36.3	36.5	36.5	-0.2	0.0	0.0	-0.5	0.0	0.0
92	PCM_127	404475	281012	BCC	47706	A4040 Watford Rd.	22.0	21.9	21.9	21.9	-0.1	-0.1	-0.1	-0.5	-0.5	-0.5
93	PCM_128	404075	287619	BCC	57238	A457 Dudley Rd.	27.2	26.4	26.3	26.1	-0.8	-0.9	-1.1	-2.9	-3.3	-4.0
94	PCM_129	411912	293746	BCC	17682	A5127 Birmingham Rd.	29.6	29.3	29.3	29.2	-0.3	-0.3	-0.4	-1.0	-1.0	-1.4
95	PCM_130	407849	284574	BCC	27159	A435 Alcester Rd.	31.7	30.3	30.1	29.9	-1.4	-1.6	-1.8	-4.4	-5.0	-5.7
96	PCM_131	408910	295560	BCC	18539	A452 Chester Rd. North	23.3	23.1	23.0	23.0	-0.2	-0.3	-0.3	-0.9	-1.3	-1.3
97	PCM_132	405279	290550	BCC	7627	A4040 Wellington Rd.	26.4	26.0	26.0	25.9	-0.4	-0.4	-0.5	-1.5	-1.5	-1.9
98	PCM_133	407403	282510	BCC	7132	A435 Alcester Rd. South	26.7	26.2	26.2	26.0	-0.5	-0.5	-0.7	-1.9	-1.9	-2.6
99	PCM_134	415873	292384	BCC	57701	A4097 Kingsbury Rd.	24.6	24.5	24.6	24.6	-0.1	0.0	0.0	-0.4	0.0	0.0
100	PCM_135	408005	292804	BCC	27196	A453 College Rd.	25.7	25.3	25.3	25.2	-0.4	-0.4	-0.5	-1.6	-1.6	-1.9
101	PCM_136	412066	296569	BCC	70226	A5127 High St.	29.3	29.2	29.2	29.2	-0.1	-0.1	-0.1	-0.3	-0.3	-0.3
102	PCM_137	411105	290977	BCC	47687	A4040 Reservoir Rd.	33.4	33.1	33.1	33.0	-0.3	-0.3	-0.4	-0.9	-0.9	-1.2
103	PCM_138	411085	280616	BCC	36366	A34 Stratford Rd.	28.1	27.9	27.9	27.8	-0.2	-0.2	-0.3	-0.7	-0.7	-1.1
104	PCM_140	410169	282752	BCC	6359	A34 Stratford Rd.	28.8	28.4	28.3	28.2	-0.4	-0.5	-0.6	-1.4	-1.7	-2.1

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
105	PCM_141	403115	286678	BCC	38010	A4040 City Rd.	23.1	22.6	22.6	22.5	-0.5	-0.5	-0.6	-2.2	-2.2	-2.6
106	PCM_142	403930	277773	BCC	57103	A441 Redditch Rd.	19.5	19.4	19.4	19.3	-0.1	-0.1	-0.2	-0.5	-0.5	-1.0
107	PCM_143	399340	277515	BCC	26396	A38 Bristol Rd. South	14.8	14.8	14.8	14.7	0.0	0.0	-0.1	0.0	0.0	-0.7
108	PCM_144	402286	284658	BCC	17612	A4123 Court Oak Rd.	21.8	21.6	21.6	21.6	-0.2	-0.2	-0.2	-0.9	-0.9	-0.9
109	PCM_145	410119	281126	BCC	8010	A4040 Brook Lane	24.5	24.3	24.4	24.3	-0.2	-0.1	-0.2	-0.8	-0.4	-0.8
110	PCM_146	404309	289502	BCC	8347	A4040 Handsworth New Rd.	27.7	26.9	26.8	26.7	-0.8	-0.9	-1.0	-2.9	-3.2	-3.6
111	PCM_147	408612	295963	BCC	78684	A452 Chester Rd. North	21.8	21.7	21.7	21.6	-0.1	-0.1	-0.2	-0.5	-0.5	-0.9
112	PCM_148	406764	290899	BCC	75003	A34	34.0	33.3	33.1	32.9	-0.7	-0.9	-1.1	-2.1	-2.6	-3.2
113	PCM_149	411167	294824	BCC	7172	A453 Jockey Rd.	25.0	24.8	24.8	24.8	-0.2	-0.2	-0.2	-0.8	-0.8	-0.8
114	PCM_150	405901	280705	BCC	37730	A4040 Fordhouse Lane	25.3	25.1	25.1	25.0	-0.2	-0.2	-0.3	-0.8	-0.8	-1.2
115	PCM_151	407209	281162	BCC	37730	A4040 Fordhouse Lane	24.7	24.4	24.4	24.4	-0.3	-0.3	-0.3	-1.2	-1.2	-1.2
116	PCM_152	403065	284398	BCC	7926	A4040 Lordwood Rd.	25.6	25.3	25.3	25.3	-0.3	-0.3	-0.3	-1.2	-1.2	-1.2
117	PCM_153	411896	296028	BCC	70224	A5127 Brassington Avenue	27.2	27.0	27.0	26.9	-0.2	-0.2	-0.3	-0.7	-0.7	-1.1
118	PCM_154	412639	297353	BCC	17133	A453 Tamworth Rd.	22.5	22.4	22.5	22.5	-0.1	0.0	0.0	-0.4	0.0	0.0
119	PCM_155	411617	298739	BCC	37818	A5127 Lichfield Rd.	22.9	22.8	22.9	22.9	-0.1	0.0	0.0	-0.4	0.0	0.0
120	PCM_156	411423	298246	BCC	57213	A454 Walsall Rd.	22.9	22.8	22.9	22.9	-0.1	0.0	0.0	-0.4	0.0	0.0
121	PCM_157	406048	283688	BCC	47998	A4029 Pebble Mill Rd.	24.8	23.8	23.6	23.5	-1.0	-1.2	-1.3	-4.0	-4.8	-5.2
122	PCM_158	407186	287602	BCC	81493	A38 St Chads Queensway	46.5	42.6	41.3	40.6	-3.9	-5.2	-5.9	-8.4	-11.2	-12.7
123	PCM_159	413856	290448	BCC	99234	A452 Chester Rd.	38.6	38.5	38.5	38.5	-0.1	-0.1	-0.1	-0.3	-0.3	-0.3
124	PCM_161	406629	286681	BCC	81487	A38 Queensway (Tunnel)	46.7	43.3	41.9	41.2	-3.4	-4.8	-5.5	-7.3	-10.3	-11.8
125	PCM_162	413845	289847	BCC	84077	A452 Newport Rd.	31.6	31.4	31.4	31.4	-0.2	-0.2	-0.2	-0.6	-0.6	-0.6
126	Non_PCM_1	407628	287094	BCC	N/A	Park St.	44.3	39.4	38.9	38.5	-4.9	-5.4	-5.8	-11.1	-12.2	-13.1
127	Non_PCM_2	407404	282031	BCC	N/A	High St.	27.4	27.0	26.9	26.8	-0.4	-0.5	-0.6	-1.5	-1.8	-2.2
128	Non_PCM_3	407386	282131	BCC	N/A	High St.	27.1	26.7	26.7	26.5	-0.4	-0.4	-0.6	-1.5	-1.5	-2.2
129	Non_PCM_4	409143	284055	BCC	N/A	Stratford Rd.	35.2	33.9	33.8	33.5	-1.3	-1.4	-1.7	-3.7	-4.0	-4.8
130	Non_PCM_5	409106	284157	BCC	N/A	Stratford Rd.	37.1	35.5	35.3	35.0	-1.6	-1.8	-2.1	-4.3	-4.9	-5.7
131	Non_PCM_7	410004	290000	BCC	N/A	Tyburn Rd.	38.5	37.7	37.5	37.3	-0.8	-1.0	-1.2	-2.1	-2.6	-3.1

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
132	Non_PCM_8	410072	290002	BCC	16365	A38 Tyburn Rd.	39.0	38.2	38.0	37.8	-0.8	-1.0	-1.2	-2.1	-2.6	-3.1
133	Non_PCM_9	404739	279699	BCC	N/A	Middleton Hall Rd.	29.6	29.4	29.5	29.4	-0.2	-0.1	-0.2	-0.7	-0.3	-0.7
134	Non_PCM_10	407458	286475	BCC	N/A	Moat Lane	46.4	41.5	40.8	40.3	-4.9	-5.6	-6.1	-10.6	-12.1	-13.1
135	Non_PCM_11	408101	287215	BCC	N/A	Curzon St.	38.9	36.6	36.3	36.0	-2.3	-2.6	-2.9	-5.9	-6.7	-7.5
136	ObjectID_18_@2m	407176	285684	BCC	N/A	Sherlock St.	37.7	35.1	34.3	33.8	-2.6	-3.4	-3.9	-6.9	-9.0	-10.3
137	ObjectID_22_@2m	408826	288686	BCC	N/A	Thimble Mill Lane	36.6	35.4	35.2	35.0	-1.2	-1.4	-1.6	-3.3	-3.8	-4.4
138	ObjectID_23_@2m	408710	289186	BCC	N/A	Thimble Mill Lane	35.2	34.1	34.0	33.7	-1.1	-1.2	-1.5	-3.1	-3.4	-4.3
139	ObjectID_25_@2m	408612	289453	BCC	N/A	Lichfield Rd.	35.7	34.4	34.2	34.0	-1.3	-1.5	-1.7	-3.6	-4.2	-4.8
140	ObjectID_26_@2m	409511	290050	BCC	N/A	Lichfield Rd.	40.6	39.7	39.6	39.5	-0.9	-1.0	-1.1	-2.2	-2.5	-2.7
141	ObjectID_28_@2m	406336	284156	BCC	N/A	Priory Rd.	31.2	29.6	29.3	29.1	-1.6	-1.9	-2.1	-5.1	-6.1	-6.7
142	ObjectID_29_@2m	406034	283376	BCC	N/A	Pershore Rd.	26.9	25.6	25.3	25.1	-1.3	-1.6	-1.8	-4.8	-5.9	-6.7
143	ObjectID_32_@2m	408222	285948	BCC	N/A	Bradford St.	38.6	35.8	35.4	34.9	-2.8	-3.2	-3.7	-7.3	-8.3	-9.6
144	ObjectID_33_@2m	408306	285871	BCC	N/A	Bradford St.	39.6	36.7	36.3	35.9	-2.9	-3.3	-3.7	-7.3	-8.3	-9.3
145	ObjectID_39_@2m	406448	288225	BCC	N/A	Unett St.	34.0	32.2	31.9	31.6	-1.8	-2.1	-2.4	-5.3	-6.2	-7.1
146	ObjectID_40_@2m	406697	289032	BCC	N/A	Clifford St.	34.1	32.6	32.4	32.1	-1.5	-1.7	-2.0	-4.4	-5.0	-5.9
147	ObjectID_41_@2m	407063	288865	BCC	N/A	Alma St.	38.2	36.2	35.7	35.4	-2.0	-2.5	-2.8	-5.2	-6.5	-7.3
148	ObjectID_42_@2m	410522	286704	BCC	N/A	Bordesley Green	33.6	32.3	32.2	32.1	-1.3	-1.4	-1.5	-3.9	-4.2	-4.5
149	ObjectID_1_@4m	406661	287126	BCC	N/A	Newhall St.	42.2	39.3	38.6	38.1	-2.9	-3.6	-4.1	-6.9	-8.5	-9.7
150	ObjectID_2_@4m	406750	287149	BCC	N/A	Cornwall St.	41.8	38.9	38.2	37.7	-2.9	-3.6	-4.1	-6.9	-8.6	-9.8
151	ObjectID_3_@4m	406863	287108	BCC	N/A	Barwick St.	40.6	38.0	37.3	36.9	-2.6	-3.3	-3.7	-6.4	-8.1	-9.1
152	ObjectID_4_@4m	406869	287137	BCC	N/A	Church St.	40.7	38.0	37.4	37.0	-2.7	-3.3	-3.7	-6.6	-8.1	-9.1
153	ObjectID_5_@4m	406938	287170	BCC	N/A	Barwick St.	40.8	38.0	37.4	37.0	-2.8	-3.4	-3.8	-6.9	-8.3	-9.3
154	ObjectID_6_@4m	406910	287227	BCC	N/A	Edmund St.	41.5	38.5	37.8	37.4	-3.0	-3.7	-4.1	-7.2	-8.9	-9.9
155	ObjectID_7_@4m	406926	286840	BCC	N/A	Temple St.	41.1	38.7	38.1	37.7	-2.4	-3.0	-3.4	-5.8	-7.3	-8.3
156	ObjectID_8_@4m	406936	286839	BCC	N/A	Temple St.	41.1	38.6	38.1	37.7	-2.5	-3.0	-3.4	-6.1	-7.3	-8.3
157	ObjectID_9_@4m	407251	286971	BCC	N/A	Bull St.	43.1	39.0	38.5	38.1	-4.1	-4.6	-5.0	-9.5	-10.7	-11.6
158	ObjectID_10_@4m	407207	286991	BCC	N/A	Bull St.	42.0	38.6	38.1	37.8	-3.4	-3.9	-4.2	-8.1	-9.3	-10.0

Table D1-1: Summary of Dispersion Modelling Results from Evaluation of Different CAZ Scenarios

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f 2020 DM			% Change in NO ₂ Conc. c/f 2020 DM		
							Do Minimu	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High	CAZ C High	CAZD Medium	CAZ D High
159	ObjectID_11_@4m	407210	287197	BCC	N/A	Corporation St.	42.2	38.1	37.6	37.2	-4.1	-4.6	-5.0	-9.7	-10.9	-11.8
160	ObjectID_12_@4m	407223	287286	BCC	N/A	Steelhouse Lane	42.3	38.7	38.0	37.6	-3.6	-4.3	-4.7	-8.5	-10.2	-11.1
161	ObjectID_13_@4m	407333	287214	BCC	N/A	Corporation St.	43.7	39.2	38.6	38.1	-4.5	-5.1	-5.6	-10.3	-11.7	-12.8
162	ObjectID_14_@4m	407381	287180	BCC	N/A	Dalton St.	44.7	40.1	39.5	38.9	-4.6	-5.2	-5.8	-10.3	-11.6	-13.0
163	ObjectID_15_@4m	407386	286548	BCC	N/A	Digbeth	49.4	43.6	42.9	42.3	-5.8	-6.5	-7.1	-11.7	-13.2	-14.4
164	ObjectID_16_@4m	408318	287349	BCC	N/A	Vauxhall Rd.	42.3	40.3	40.2	39.8	-2.0	-2.1	-2.5	-4.7	-5.0	-5.9
165	ObjectID_17_@4m	408482	287482	BCC	N/A	Vauxhall Rd.	39.2	37.5	37.4	37.1	-1.7	-1.8	-2.1	-4.3	-4.6	-5.4
166	ObjectID_19_@4m	406263	288037	BCC	N/A	Great Hampton St.	35.7	33.2	32.7	32.3	-2.5	-3.0	-3.4	-7.0	-8.4	-9.5
167	ObjectID_20_@4m	408331	288081	BCC	N/A	Nechells Parkway	38.5	36.6	36.3	36.0	-1.9	-2.2	-2.5	-4.9	-5.7	-6.5
168	ObjectID_21_@4m	408813	288266	BCC	N/A	Nechells Parkway	37.2	35.8	35.6	35.3	-1.4	-1.6	-1.9	-3.8	-4.3	-5.1
169	ObjectID_24_@4m	408754	289503	BCC	N/A	Lichfield Rd.	36.0	34.8	34.6	34.4	-1.2	-1.4	-1.6	-3.3	-3.9	-4.4
170	ObjectID_27_@4m	408057	286304	BCC	N/A	High St. Deritend	45.4	41.0	39.9	39.2	-4.4	-5.5	-6.2	-9.7	-12.1	-13.7
171	ObjectID_31_@4m	407818	286195	BCC	N/A	Bradford St.	42.5	39.3	38.9	38.4	-3.2	-3.6	-4.1	-7.5	-8.5	-9.6
172	ObjectID_34_@4m	407307	285959	BCC	N/A	Sherlock St.	37.9	34.8	34.1	33.6	-3.1	-3.8	-4.3	-8.2	-10.0	-11.3
173	ObjectID_35_@4m	406593	287207	BCC	N/A	Newhall St.	41.9	38.9	38.3	37.8	-3.0	-3.6	-4.1	-7.2	-8.6	-9.8
174	ObjectID_36_@4m	406236	287395	BCC	N/A	Graham St.	38.9	36.9	36.5	36.1	-2.0	-2.4	-2.8	-5.1	-6.2	-7.2
175	ObjectID_37_@4m	406156	287527	BCC	N/A	Vittoria St.	38.3	36.5	36.2	35.8	-1.8	-2.1	-2.5	-4.7	-5.5	-6.5
176	ObjectID_38_@4m	406335	287953	BCC	N/A	Great Hampton St.	40.2	38.1	37.5	37.1	-2.1	-2.7	-3.1	-5.2	-6.7	-7.7
177	Children's Hospital	407313	287534	BCC	N/A	A38 / A4400	45.9	41.9	40.7	40.0	-4.0	-5.2	-5.9	-8.7	-11.3	-12.9
178	Childrens_Hospital_1	407314	287534	BCC	N/A	A38 / A4400	45.9	41.9	40.7	40.1	-4.0	-5.2	-5.8	-8.7	-11.3	-12.6
179	Childrens_Hospital_2	407400	287492	BCC	N/A	A38 / A4400	45.9	41.4	40.5	39.8	-4.5	-5.4	-6.1	-9.8	-11.8	-13.3
Number of Exceedances							41	19	16	12						
Mean											-1.4	-1.7	-1.9	-3.7	-4.3	-4.9
Standard Deviation											1.3	1.6	1.8	2.9	3.7	4.0

Appendix E. Dispersion Modelling Results from Additional Measures Packages

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
1	PCM_0	406752	286515	BCC	81490	A4400 Suffolk St. Queensway	45.0	45.1	42.7	42.7	+0.1	0.0	+0.2	0.0
2	PCM_2	407477	287785	BCC	56394	A38 Corporation St.	42.6	42.3	40.6	40.3	-0.3	-0.3	-0.7	-0.7
3	PCM_3	406861	285777	BCC	81489	A38 Bristol St.	34.4	34.6	32.6	32.7	+0.2	+0.1	+0.6	+0.3
4	PCM_4	407844	288028	BCC	7676	A4540 Dartmouth Circus	41.7	41.2	40.8	40.3	-0.5	-0.5	-1.2	-1.2
5	PCM_6	408473	286918	BCC	27736	A4540 Watery Lane Middleway	41.8	42.0	41.4	41.5	+0.2	+0.1	+0.5	0.2
6	PCM_8	406860	285495	BCC	17998	A4540 Belgrave Middleway	36.2	36.4	34.5	34.7	+0.2	+0.2	+0.6	0.6
7	PCM_10	410204	290048	BCC		A38 Tyburn Road	36.6	36.6	36.3	36.2	0.0	-0.1	0.0	-0.3
8	PCM_11	407836	289062	BCC	57233	A38(M) Aston Expressway	37.8	37.6	36.5	36.3	-0.2	-0.2	-0.5	-0.5
9	PCM_12	407257	285308	BCC	57194	A4540 Belgrave Middleway	35.5	35.4	34.8	34.7	-0.1	-0.1	-0.3	-0.3
10	PCM_13	408578	290003	BCC	36070	A38(M) Aston Expressway (Elevated Rd.)	37.6	37.4	36.6	36.4	-0.2	-0.2	-0.5	-0.5
11	PCM_14	407594	288084	BCC	70227	A38(M) Aston Expressway	40.8	40.5	38.9	38.6	-0.3	-0.3	-0.7	-0.8
12	PCM_15	413727	291047	BCC	47202	A452 Chester Rd.	34.1	34.1	34.2	34.1	0.0	-0.1	0.0	-0.3
13	PCM_16	408461	285861	BCC	28042	A4540 Bordesley Middleway	37.0	36.8	36.6	36.4	-0.2	-0.2	-0.5	-0.5
14	PCM_17	407312	288273	BCC	37779	A4540 Newtown Middleway	38.5	38.2	37.7	37.4	-0.3	-0.3	-0.8	-0.8
15	PCM_18	408027	287667	BCC	57193	A4540 Lawley Middleway	39.9	40.5	39.3	39.8	+0.6	+0.5	+1.5	+1.3
16	PCM_20	404909	286003	BCC	7179	A456 Hagley Rd.	29.1	29.0	28.7	28.6	-0.1	-0.1	-0.3	-0.3
17	PCM_21	409968	289903	HE	48185	M6	41.9	41.8	41.6	41.6	-0.1	0.0	-0.2	0.0
18	PCM_24	410214	290721	BCC	27773	A38(M) Aston Expressway	31.2	31.0	30.7	30.6	-0.2	-0.1	-0.6	-0.3
19	PCM_26	406858	288359	BCC	17644	A4540 New John St. West	33.6	33.5	33.1	32.9	-0.1	-0.2	-0.3	-0.6
20	PCM_27	407083	291647	BCC	17132	A453 Aldridge Rd.	30.7	30.6	30.3	30.2	-0.1	-0.1	-0.3	-0.3
21	PCM_28	408950	285641	BCC	28465	A45(T) Coventry Rd.	35.2	34.9	34.7	34.5	-0.3	-0.2	-0.9	-0.6
22	PCM_29	411671	290578	BCC	56399	A38 Tyburn Rd.	33.2	33.2	33.1	33.0	0.0	-0.1	0.0	-0.3
23	PCM_30	408837	291121	HE	70230	M6	41.2	41.1	41.0	40.9	-0.1	-0.1	-0.2	-0.2

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
24	PCM_32	415263	284344	BCC	56416	A45(T) Coventry Rd.	27.2	27.2	27.2	27.1	0.0	-0.1	0.0	-0.4
25	PCM_34	412665	290982	BCC	6390	A38 Kingsbury Rd.	30.8	30.8	30.8	30.7	0.0	-0.1	0.0	-0.3
26	PCM_35	408084	285451	BCC	47166	A4540 Highgate Middleway	35.6	35.3	35.2	34.9	-0.3	-0.3	-0.8	-0.9
27	PCM_38	406168	285875	BCC	37780	A4540 Lee Bank Middleway	31.7	31.7	31.1	31.0	0.0	-0.1	0.0	-0.3
28	PCM_39	406762	287329	BCC	81492	A4400 Lancaster Circus Q'way	41.4	41.9	39.5	40.0	+0.5	+0.5	+1.2	+1.3
29	PCM_41	407381	292440	BCC	47206	A453 College Rd.	32.2	32.1	31.9	31.8	-0.1	-0.1	-0.3	-0.3
30	PCM_43	405799	288186	BCC	47731	A4540 Icknield St.	31.7	31.7	31.6	31.6	0.0	0.0	0.0	0.0
31	PCM_44	405626	287598	BCC	47731	A4540 Icknield St.	33.7	33.7	33.5	33.4	0.0	-0.1	0.0	-0.3
32	PCM_45	403507	286035	BCC	38552	A456 Hagley Rd.	25.6	25.4	25.2	25.0	-0.2	-0.2	-0.8	-0.8
33	PCM_48	412138	288809	BCC	27690	A4040 Bromford Lane	33.0	33.0	33.0	33.0	0.0	0.0	0.0	0.0
34	PCM_50	407025	291233	BCC	75005	A453 Aldridge Rd.	32.3	32.2	31.9	31.8	-0.1	-0.1	-0.3	-0.3
35	PCM_51	404129	282515	BCC	81576	A4040 Chapel Lane	28.1	28.1	28.0	28.0	0.0	0.0	0.0	0.0
36	PCM_54	406776	285419	BCC	26395	A38 Bristol Rd.	33.8	33.7	32.4	32.3	-0.1	-0.1	-0.3	-0.3
37	PCM_55	406670	290330	BCC	56330	A34 New Town Row	30.0	29.8	29.5	29.3	-0.2	-0.2	-0.7	-0.7
38	PCM_56	406697	284702	BCC	47176	A441 Pershore Rd.	29.0	28.8	28.3	28.1	-0.2	-0.2	-0.7	-0.7
39	PCM_60	407906	288814	BCC	46398	A5127 Lichfield Rd.	38.4	38.2	37.4	37.3	-0.2	-0.1	-0.5	-0.3
40	PCM_61	405450	287362	BCC	27737	A4540 Icknield St.	32.7	32.7	32.6	32.6	0.0	0.0	0.0	0.0
41	PCM_63	404776	283163	BCC	81577	A38 Bristol Rd.	34.0	34.0	33.7	33.6	0.0	-0.1	0.0	-0.3
42	PCM_65	403488	283605	BCC	81575	A4040 Harborne Park Rd.	22.1	22.1	22.1	22.1	0.0	0.0	0.0	0.0
43	PCM_66	402119	285954	BCC	37233	A456 Hagley Rd. West	24.4	24.3	24.2	24.1	-0.1	-0.1	-0.4	-0.4
44	PCM_67	414424	292023	BCC	26393	A38 Kingsbury Rd.	27.3	27.3	27.3	27.2	0.0	-0.1	0.0	-0.4
45	PCM_69	413022	291939	BCC	17128	A452 Chester Rd.	32.7	32.6	32.7	32.7	-0.1	0.0	-0.3	0.0
46	PCM_70	405427	286269	BCC	7677	A4540 Ladywood Middleway	31.8	31.8	31.5	31.6	0.0	+0.1	0.0	+0.3

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
47	PCM_73	411162	283879	BCC	28476	A41 Warwick Rd.	28.6	28.6	28.5	28.4	0.0	-0.1	0.0	-0.4
48	PCM_74	404984	279846	BCC	7142	A441 Pershore Rd.	31.9	31.8	31.8	31.7	-0.1	-0.1	-0.3	-0.3
49	PCM_76	410198	283914	BCC	26454	A41 Warwick Rd.	26.8	26.7	26.6	26.5	-0.1	-0.1	-0.4	-0.4
50	PCM_78	405669	283632	BCC	6392	A38 Bristol Rd.	27.5	27.3	26.9	26.8	-0.2	-0.1	-0.7	-0.4
51	PCM_79	409221	284326	BCC	48068	A41 Warwick Rd.	32.6	32.4	32.3	32.1	-0.2	-0.2	-0.6	-0.6
52	PCM_83	408525	285031	BCC	56331	A41 Stratford Rd.	33.7	33.4	33.2	32.9	-0.3	-0.3	-0.9	-0.9
53	PCM_85	412309	284572	BCC	17593	A4040 Stockfield Rd.	31.3	31.2	31.3	31.3	-0.1	0.0	-0.3	0.0
54	PCM_86	407715	288583	BCC	74479	A38(M) Aston Expressway	42.2	41.9	40.7	40.5	-0.3	-0.2	-0.7	-0.5
55	PCM_87	404974	287651	BCC	37238	A457 Spring Hill	27.9	27.7	27.5	27.4	-0.2	-0.1	-0.7	-0.4
56	PCM_88	408277	284783	BCC	7927	A4540 Highgate Rd.	30.1	30.1	29.8	29.7	0.0	-0.1	0.0	-0.3
57	PCM_89	403255	290217	BCC	6448	A41 Holyhead Rd.	22.3	22.2	22.2	22.2	-0.1	0.0	-0.4	0.0
58	PCM_90	409831	290070	BCC	70236	A38(M) Tyburn Rd.	35.5	35.4	35.2	35.1	-0.1	-0.1	-0.3	-0.3
59	PCM_91	412949	290234	BCC	99233	A47 Fort Parkway	32.9	32.9	32.8	32.8	0.0	0.0	0.0	0.0
60	PCM_92	401772	278975	BCC	46400	A38 Bristol Rd. South	22.5	22.4	22.3	22.2	-0.1	-0.1	-0.4	-0.4
61	PCM_93	404420	289540	BCC	28039	A41 Soho Rd.	28.6	28.5	28.3	28.2	-0.1	-0.1	-0.3	-0.4
62	PCM_94	405828	282547	BCC	27167	A441 Pershore Rd.	23.7	23.6	23.3	23.2	-0.1	-0.1	-0.4	-0.4
63	PCM_95	411355	280336	BCC	73055	A34 Stratford Rd.	24.8	24.6	24.7	24.6	-0.2	-0.1	-0.8	-0.4
64	PCM_96	406055	288388	BCC	70221	A4540	33.9	33.8	33.5	33.4	-0.1	-0.1	-0.3	-0.3
65	PCM_97	403782	290765	BCC	57689	A4040 Oxhill Rd.	22.5	22.5	22.5	22.5	0.0	0.0	0.0	0.0
66	PCM_98	409796	289307	BCC	75461	A47 Nechells Parkway	33.5	33.5	33.4	33.4	0.0	0.0	0.0	0.0
67	PCM_99	404282	287636	BCC	58153	A457 Dudley Rd.	27.9	27.9	27.7	27.6	0.0	-0.1	0.0	-0.4
68	PCM_100	411812	292780	BCC	37222	A452 Chester Rd.	31.2	31.1	31.2	31.1	-0.1	-0.1	-0.3	-0.3
69	PCM_101	405948	288561	BCC	70223	A4540 New John St. West	31.6	31.4	31.1	30.9	-0.2	-0.2	-0.6	-0.6
70	PCM_102	411244	292289	BCC	47777	A5127 Birmingham Rd.	28.8	28.7	28.5	28.4	-0.1	-0.1	-0.3	-0.4

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
71	PCM_103	411333	290157	BCC	75001	A4040 Wheelwright Rd.	35.5	35.4	35.3	35.3	-0.1	0.0	-0.3	0.0
72	PCM_104	403755	289766	BCC	36456	A41 Holyhead Rd.	28.8	28.7	28.5	28.4	-0.1	-0.1	-0.3	-0.4
73	PCM_105	411537	283251	BCC	47688	A4040 Fox Hollies Rd.	31.3	31.2	31.4	31.3	-0.1	-0.1	-0.3	-0.3
74	PCM_107	404935	279189	BCC	37198	A441 Pershore Rd. South	32.4	32.3	32.3	32.3	-0.1	0.0	-0.3	0.0
75	PCM_109	409456	290312	HE	70234	M6	38.9	38.8	38.6	38.5	-0.1	-0.1	-0.3	-0.3
76	PCM_110	405765	288416	BCC	70222	A4540 Heaton St.	30.2	30.1	30.0	29.9	-0.1	-0.1	-0.3	-0.3
77	PCM_111	405402	293241	BCC	46365	A34 Walsall Rd.	22.9	22.9	22.7	22.7	0.0	0.0	0.0	0.0
78	PCM_113	405229	289267	BCC	16423	A41 Soho Hill	28.1	28.0	27.6	27.5	-0.1	-0.1	-0.4	-0.4
79	PCM_114	401966	279754	BCC	16367	A38 Bristol Rd. South	23.7	23.7	23.6	23.5	0.0	-0.1	0.0	-0.4
80	PCM_115	409949	282822	BCC	26361	A34 Stratford Rd.	24.6	24.5	24.4	24.3	-0.1	-0.1	-0.4	-0.4
81	PCM_116	409195	290614	HE	70233	M6	39.8	39.7	39.4	39.3	-0.1	-0.1	-0.3	-0.3
82	PCM_117	411658	297851	BCC	27203	A5127 Lichfield Rd.	22.3	22.3	22.4	22.3	0.0	-0.1	0.0	-0.4
83	PCM_118	410496	293811	BCC	7167	A452 Chester Rd.	31.0	30.9	31.0	30.9	-0.1	-0.1	-0.3	-0.3
84	PCM_119	407512	280005	BCC	37188	A435 Alcester Rd. South	22.1	22.0	22.0	22.0	-0.1	0.0	-0.5	0.0
85	PCM_120	410877	281437	BCC	27691	A4040 Fox Hollies Rd.	26.7	26.6	26.8	26.7	-0.1	-0.1	-0.4	-0.4
86	PCM_121	411945	283283	BCC	6449	A41 Warwick Rd.	27.5	27.5	27.4	27.4	0.0	0.0	0.0	0.0
87	PCM_122	412630	285198	BCC	57729	A4040 Church Rd.	32.0	32.0	32.1	32.1	0.0	0.0	0.0	0.0
88	PCM_123	409583	294591	BCC	27191	A452 Chester Rd. North	28.7	28.6	28.7	28.7	-0.1	0.0	-0.3	0.0
89	PCM_124	411426	290122	BCC	75000	A4040 Bromford Lane	39.0	39.0	38.8	38.8	0.0	0.0	0.0	0.0
90	PCM_125	411834	295634	BCC	37227	A5127 Birmingham Rd.	30.5	30.4	30.4	30.3	-0.1	-0.1	-0.3	-0.3
91	PCM_126	412976	287572	BCC	7628	A4040 Station Rd.	36.3	36.3	36.5	36.5	0.0	0.0	0.0	0.0
92	PCM_127	404475	281012	BCC	47706	A4040 Watford Rd.	21.9	21.9	21.9	21.9	0.0	0.0	0.0	0.0
93	PCM_128	404075	287619	BCC	57238	A457 Dudley Rd.	26.4	26.3	26.1	26.1	-0.1	0.0	-0.4	0.0
94	PCM_129	411912	293746	BCC	17682	A5127 Birmingham Rd.	29.3	29.2	29.2	29.1	-0.1	-0.1	-0.3	-0.3

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
95	PCM_130	407849	284574	BCC	27159	A435 Alcester Rd.	30.3	30.1	29.9	29.7	-0.2	-0.2	-0.7	-0.7
96	PCM_131	408910	295560	BCC	18539	A452 Chester Rd. North	23.1	23.0	23.0	23.0	-0.1	0.0	-0.4	0.0
97	PCM_132	405279	290550	BCC	7627	A4040 Wellington Rd.	26.0	26.0	25.9	25.8	0.0	-0.1	0.0	-0.4
98	PCM_133	407403	282510	BCC	7132	A435 Alcester Rd. South	26.2	26.1	26.0	25.9	-0.1	-0.1	-0.4	-0.4
99	PCM_134	415873	292384	BCC	57701	A4097 Kingsbury Rd.	24.5	24.5	24.6	24.5	0.0	-0.1	0.0	-0.4
100	PCM_135	408005	292804	BCC	27196	A453 College Rd.	25.3	25.2	25.2	25.1	-0.1	-0.1	-0.4	-0.4
101	PCM_136	412066	296569	BCC	70226	A5127 High St.	29.2	29.1	29.2	29.1	-0.1	-0.1	-0.3	-0.3
102	PCM_137	411105	290977	BCC	47687	A4040 Reservoir Rd.	33.1	33.0	33.0	32.9	-0.1	-0.1	-0.3	-0.3
103	PCM_138	411085	280616	BCC	36366	A34 Stratford Rd.	27.9	27.7	27.8	27.7	-0.2	-0.1	-0.7	-0.4
104	PCM_140	410169	282752	BCC	6359	A34 Stratford Rd.	28.4	28.3	28.2	28.0	-0.1	-0.2	-0.4	-0.7
105	PCM_141	403115	286678	BCC	38010	A4040 City Rd.	22.6	22.7	22.5	22.5	+0.1	0.0	+0.4	0.0
106	PCM_142	403930	277773	BCC	57103	A441 Redditch Rd.	19.4	19.3	19.3	19.3	-0.1	0.0	-0.5	0.0
107	PCM_143	399340	277515	BCC	26396	A38 Bristol Rd. South	14.8	14.7	14.7	14.7	-0.1	0.0	-0.7	0.0
108	PCM_144	402286	284658	BCC	17612	A4123 Court Oak Rd.	21.6	21.6	21.6	21.6	0.0	0.0	0.0	0.0
109	PCM_145	410119	281126	BCC	8010	A4040 Brook Lane	24.3	24.2	24.3	24.3	-0.1	0.0	-0.4	0.0
110	PCM_146	404309	289502	BCC	8347	A4040 Handsworth New Rd.	26.9	26.8	26.7	26.6	-0.1	-0.1	-0.4	-0.4
111	PCM_147	408612	295963	BCC	78684	A452 Chester Rd. North	21.7	21.6	21.6	21.6	-0.1	0.0	-0.5	0.0
112	PCM_148	406764	290899	BCC	75003	A34	33.3	33.2	32.9	32.7	-0.1	-0.2	-0.3	-0.6
113	PCM_149	411167	294824	BCC	7172	A453 Jockey Rd.	24.8	24.7	24.8	24.8	-0.1	0.0	-0.4	0.0
114	PCM_150	405901	280705	BCC	37730	A4040 Fordhouse Lane	25.1	25.1	25.0	25.0	0.0	0.0	0.0	0.0
115	PCM_151	407209	281162	BCC	37730	A4040 Fordhouse Lane	24.4	24.3	24.4	24.3	-0.1	-0.1	-0.4	-0.4
116	PCM_152	403065	284398	BCC	7926	A4040 Lordswood Rd.	25.3	25.3	25.3	25.3	0.0	0.0	0.0	0.0
117	PCM_153	411896	296028	BCC	70224	A5127 Brassington Avenue	27.0	26.9	26.9	26.9	-0.1	0.0	-0.4	0.0
118	PCM_154	412639	297353	BCC	17133	A453 Tamworth Rd.	22.4	22.4	22.5	22.4	0.0	-0.1	0.0	-0.4

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
119	PCM_155	411617	298739	BCC	37818	A5127 Lichfield Rd.	22.8	22.7	22.9	22.8	-0.1	-0.1	-0.4	-0.4
120	PCM_156	411423	298246	BCC	57213	A454 Walsall Rd.	22.8	22.7	22.9	22.8	-0.1	-0.1	-0.4	-0.4
121	PCM_157	406048	283688	BCC	47998	A4029 Pebble Mill Rd.	23.8	23.8	23.5	23.4	0.0	-0.1	0.0	-0.4
122	PCM_158	407186	287602	BCC	81493	A38 St Chads Queensway	42.6	42.5	40.6	40.5	-0.1	-0.1	-0.2	-0.2
123	PCM_159	413856	290448	BCC	99234	A452 Chester Rd.	38.5	38.4	38.5	38.5	-0.1	0.0	-0.3	0.0
124	PCM_161	406629	286681	BCC	81487	A38 Queensway (Tunnel)	43.3	43.0	41.2	41.0	-0.3	-0.2	-0.7	-0.5
125	PCM_162	413845	289847	BCC	84077	A452 Newport Rd.	31.4	31.4	31.4	31.4	0.0	0.0	0.0	0.0
126	Non_PCM_1	407628	287094	BCC	N/A	Park St.	39.4	38.9	38.5	38.0	-0.5	-0.5	-1.3	-1.3
127	Non_PCM_2	407404	282031	BCC	N/A	High St.	27.0	26.8	26.8	26.7	-0.2	-0.1	-0.7	-0.4
128	Non_PCM_3	407386	282131	BCC	N/A	High St.	26.7	26.6	26.5	26.4	-0.1	-0.1	-0.4	-0.4
129	Non_PCM_4	409143	284055	BCC	N/A	Stratford Rd.	33.9	33.7	33.5	33.3	-0.2	-0.2	-0.6	-0.6
130	Non_PCM_5	409106	284157	BCC	N/A	Stratford Rd.	35.5	35.3	35.0	34.7	-0.2	-0.3	-0.6	-0.9
131	Non_PCM_7	410004	290000	BCC	N/A	Tyburn Rd.	37.7	37.6	37.3	37.3	-0.1	0.0	-0.3	0.0
132	Non_PCM_8	410072	290002	BCC	16365	A38 Tyburn Rd.	38.2	38.2	37.8	37.7	0.0	-0.1	0.0	-0.3
133	Non_PCM_9	404739	279699	BCC	N/A	Middleton Hall Rd.	29.4	29.4	29.4	29.4	0.0	0.0	0.0	0.0
134	Non_PCM_10	407458	286475	BCC	N/A	Moat Lane	41.5	39.9	40.3	38.9	-1.6	-1.4	-3.9	-3.5
135	Non_PCM_11	408101	287215	BCC	N/A	Curzon St.	36.6	36.5	36.0	35.9	-0.1	-0.1	-0.3	-0.3
136	ObjectID_18_@2m	407176	285684	BCC	N/A	Sherlock St.	35.1	35.2	33.8	34.0	+0.1	+0.2	+0.3	+0.6
137	ObjectID_22_@2m	408826	288686	BCC	N/A	Thimble Mill Lane	35.4	35.3	35.0	34.9	-0.1	-0.1	-0.3	-0.3
138	ObjectID_23_@2m	408710	289186	BCC	N/A	Thimble Mill Lane	34.1	34.0	33.7	33.6	-0.1	-0.1	-0.3	-0.3
139	ObjectID_25_@2m	408612	289453	BCC	N/A	Lichfield Rd.	34.4	34.3	34.0	33.9	-0.1	-0.1	-0.3	-0.3
140	ObjectID_26_@2m	409511	290050	BCC	N/A	Lichfield Rd.	39.7	39.7	39.5	39.3	0.0	-0.2	0.0	-0.5
141	ObjectID_28_@2m	406336	284156	BCC	N/A	Priory Rd.	29.6	29.5	29.1	29.0	-0.1	-0.1	-0.3	-0.3
142	ObjectID_29_@2m	406034	283376	BCC	N/A	Pershore Rd.	25.6	25.5	25.1	25.0	-0.1	-0.1	-0.4	-0.4

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
143	ObjectID_32_@2m	408222	285948	BCC	N/A	Bradford St.	35.8	35.4	34.9	34.6	-0.4	-0.3	-1.1	-0.9
144	ObjectID_33_@2m	408306	285871	BCC	N/A	Bradford St.	36.7	36.3	35.9	35.5	-0.4	-0.4	-1.1	-1.1
145	ObjectID_39_@2m	406448	288225	BCC	N/A	Unett St.	32.2	32.1	31.6	31.5	-0.1	-0.1	-0.3	-0.3
146	ObjectID_40_@2m	406697	289032	BCC	N/A	Clifford St.	32.6	32.4	32.1	32.0	-0.2	-0.1	-0.6	-0.3
147	ObjectID_41_@2m	407063	288865	BCC	N/A	Alma St.	36.2	35.9	35.4	35.1	-0.3	-0.3	-0.8	-0.8
148	ObjectID_42_@2m	410522	286704	BCC	N/A	Bordesley Green	32.3	32.2	32.1	32.0	-0.1	-0.1	-0.3	-0.3
149	ObjectID_1_@4m	406661	287126	BCC	N/A	Newhall St.	39.3	39.1	38.1	38.0	-0.2	-0.1	-0.5	-0.3
150	ObjectID_2_@4m	406750	287149	BCC	N/A	Cornwall St.	38.9	38.9	37.7	37.7	0.0	0.0	0.0	0.0
151	ObjectID_3_@4m	406863	287108	BCC	N/A	Barwick St.	38.0	37.9	36.9	36.9	-0.1	0.0	-0.3	0.0
152	ObjectID_4_@4m	406869	287137	BCC	N/A	Church St.	38.0	38.0	37.0	36.9	0.0	-0.1	0.0	-0.3
153	ObjectID_5_@4m	406938	287170	BCC	N/A	Barwick St.	38.0	38.0	37.0	37.0	0.0	0.0	0.0	0.0
154	ObjectID_6_@4m	406910	287227	BCC	N/A	Edmund St.	38.5	38.5	37.4	37.4	0.0	0.0	0.0	0.0
155	ObjectID_7_@4m	406926	286840	BCC	N/A	Temple St.	38.7	38.6	37.7	37.7	-0.1	0.0	-0.3	0.0
156	ObjectID_8_@4m	406936	286839	BCC	N/A	Temple St.	38.6	38.5	37.7	37.6	-0.1	-0.1	-0.3	-0.3
157	ObjectID_9_@4m	407251	286971	BCC	N/A	Bull St.	39.0	38.5	38.1	37.7	-0.5	-0.4	-1.3	-1.0
158	ObjectID_10_@4m	407207	286991	BCC	N/A	Bull St.	38.6	38.3	37.8	37.5	-0.3	-0.3	-0.8	-0.8
159	ObjectID_11_@4m	407210	287197	BCC	N/A	Corporation St.	38.1	37.7	37.2	36.8	-0.4	-0.4	-1.0	-1.1
160	ObjectID_12_@4m	407223	287286	BCC	N/A	Steelhouse Lane	38.7	38.2	37.6	37.2	-0.5	-0.4	-1.3	-1.1
161	ObjectID_13_@4m	407333	287214	BCC	N/A	Corporation St.	39.2	38.5	38.1	37.5	-0.7	-0.6	-1.8	-1.6
162	ObjectID_14_@4m	407381	287180	BCC	N/A	Dalton St.	40.1	39.3	38.9	38.1	-0.8	-0.8	-2.0	-2.1
163	ObjectID_15_@4m	407386	286548	BCC	N/A	Digbeth	43.6	41.8	42.3	40.8	-1.8	-1.5	-4.1	-3.5
164	ObjectID_16_@4m	408318	287349	BCC	N/A	Vauxhall Rd.	40.3	40.5	39.8	39.9	+0.2	+0.1	+0.5	+0.3
165	ObjectID_17_@4m	408482	287482	BCC	N/A	Vauxhall Rd.	37.5	37.4	37.1	37.0	-0.1	-0.1	-0.3	-0.3
166	ObjectID_19_@4m	406263	288037	BCC	N/A	Great Hampton St.	33.2	33.1	32.3	32.2	-0.1	-0.1	-0.3	-0.3

Table E1-1: Summary of Dispersion Modelling Results from Additional Measures Packages

Ref	Receptor	Easting	Northing	Asset Owner	Census ID	Road	Modelled NO ₂ Concentration µg/m ³				Absolute Change in NO ₂ Conc. µg/m ³ c/f Respective CAZ		% Change in NO ₂ Conc. c/f Respective CAZ	
							CAZ C High	CAZ C High + AM	CAZ D High	CAZ C High + AM	CAZ C High + AM	CAZ D High + AM	CAZ C High + AM	CAZ D High + AM
167	ObjectID_20_@4m	408331	288081	BCC	N/A	Nechells Parkway	36.6	36.4	36.0	35.8	-0.2	-0.2	-0.5	-0.6
168	ObjectID_21_@4m	408813	288266	BCC	N/A	Nechells Parkway	35.8	35.5	35.3	35.1	-0.3	-0.2	-0.8	-0.6
169	ObjectID_24_@4m	408754	289503	BCC	N/A	Lichfield Rd.	34.8	34.7	34.4	34.3	-0.1	-0.1	-0.3	-0.3
170	ObjectID_27_@4m	408057	286304	BCC	N/A	High St. Deritend	41.0	39.9	39.2	38.3	-1.1	-0.9	-2.7	-2.3
171	ObjectID_31_@4m	407818	286195	BCC	N/A	Bradford St.	39.3	38.6	38.4	37.8	-0.7	-0.6	-1.8	-1.6
172	ObjectID_34_@4m	407307	285959	BCC	N/A	Sherlock St.	34.8	34.8	33.6	33.6	0.0	0.0	0.0	0.0
173	ObjectID_35_@4m	406593	287207	BCC	N/A	Newhall St.	38.9	38.8	37.8	37.7	-0.1	-0.1	-0.3	-0.3
174	ObjectID_36_@4m	406236	287395	BCC	N/A	Graham St.	36.9	36.6	36.1	35.9	-0.3	-0.2	-0.8	-0.6
175	ObjectID_37_@4m	406156	287527	BCC	N/A	Vittoria St.	36.5	36.3	35.8	35.6	-0.2	-0.2	-0.5	-0.6
176	ObjectID_38_@4m	406335	287953	BCC	N/A	Great Hampton St.	38.1	38.0	37.1	37.0	-0.1	-0.1	-0.3	-0.3
177	Children's Hospital	407313	287534	BCC	N/A	A38 / A4400	41.9	41.5	40.0	39.8	-0.4	-0.2	-1.0	-0.5
178	Childrens_Hospital_1	407314	287534	BCC	N/A	A38 / A4400	41.9	41.6	40.1	39.8	-0.3	-0.3	-0.7	-0.7
179	Childrens_Hospital_2	407400	287492	BCC	N/A	A38 / A4400	41.4	40.8	39.8	39.2	-0.6	-0.6	-1.4	-1.5
Number of Exceedances							19	17	12	10				
Mean											-0.1	-0.1	-0.4	-0.4
Standard Deviation											+0.2	+0.2	+0.6	+0.5